

TakeTopDSH Team

User Guide


Table of Contents

- 1. Overview
- 2. Platform Login
- 3. Administration Page
- 4. DSH Workbench
- 5. Other Member Operations
- 6. DSH Operation
- 7. Language
- 8. Platform Support
- 9. License

This guide is for users. It explains: Install → Login → Open the Workbench → File Management / My Tasks → Admin task assignment, instance management, language switching → member DSH usage!

1. Installation

Download the installation file: Open the site at <https://github.com/TakeTopITS/TakeTopDSHTeam> , click the download button as shown in the figure below, and then extract the installation package.

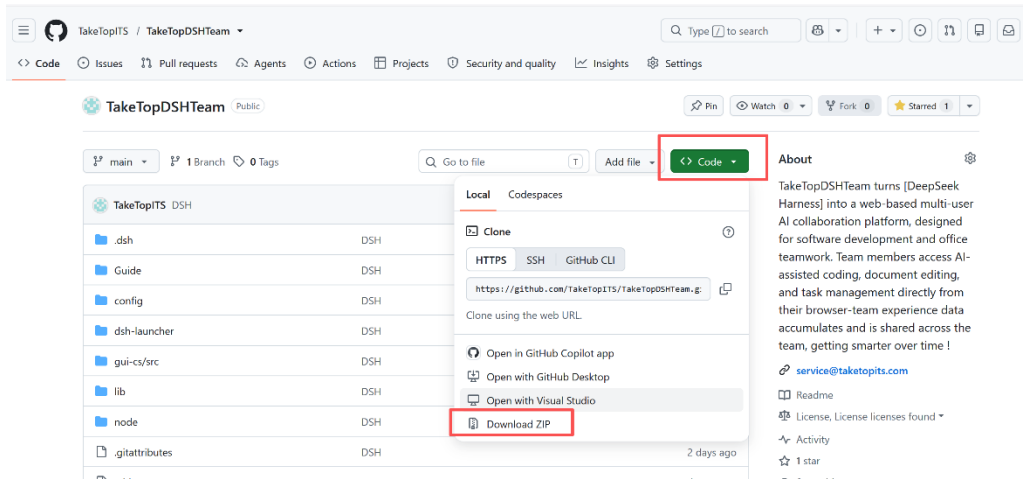

TakeTopDSH Team is a no-install, copy-and-run software. Follow these steps: copy the `TakeTopDshTeam` folder to the target machine → on Windows double-click `start.bat`, on macOS/Linux run `bash start.sh` → open `http://127.0.0.1:46001` in the browser → click **“Open DSH”** to start using it. Detailed instructions below:

1-1. Windows

1-1-1. Copy the entire `TakeTopDshTeam` folder to the target computer.

1-1-2. Double-click **`start.bat`** (or right-click → Run as administrator, if the port is occupied).

1-1-3. The browser automatically opens the login page `http://127.0.0.1:46001`.

1-2. macOS (Apple Silicon, arm64)

1-2-1. Copy the entire `TakeTopDshTeam` folder to the target Mac.

1-2-2. Open Terminal and go to the folder:

```
bash cd /path/to/TakeTopDshTeam bash start.sh
```

1-2-3. On first run it automatically unpacks the bundled Node.js and the bundled `@deepseek-ai/dsh` packages — **fully offline**, no extra download and no compilation.

1-2-4. The browser automatically opens the login page `http://127.0.0.1:46001`.

1-3. Linux (x64 / arm64)

1-3-1. Copy the entire `TakeTopDshTeam` folder to the target machine.

1-3-2. Open a terminal and go to the folder:

```
bash cd /path/to/TakeTopDshTeam bash start.sh
```

1-3-3. On first run it automatically unpacks the bundled Node.js and the bundled `@deepseek-ai/dsh` packages — **fully offline**, no extra download and no compilation.

1-3-4. The browser automatically opens the login page `http://127.0.0.1:46001`.


2. Platform Login

After each reboot, open the TakeTopDshTeam folder. You will see the two files below. Run the appropriate one for your system to open the login page:

 start.bat	2026/9/8 21:59	Windows 批处理文件	3 KB
 start.sh	2026/9/7 0:24	SH 文件	4 KB

> - Windows: double-click **start.bat**

> - macOS / Linux: run **./start.sh**

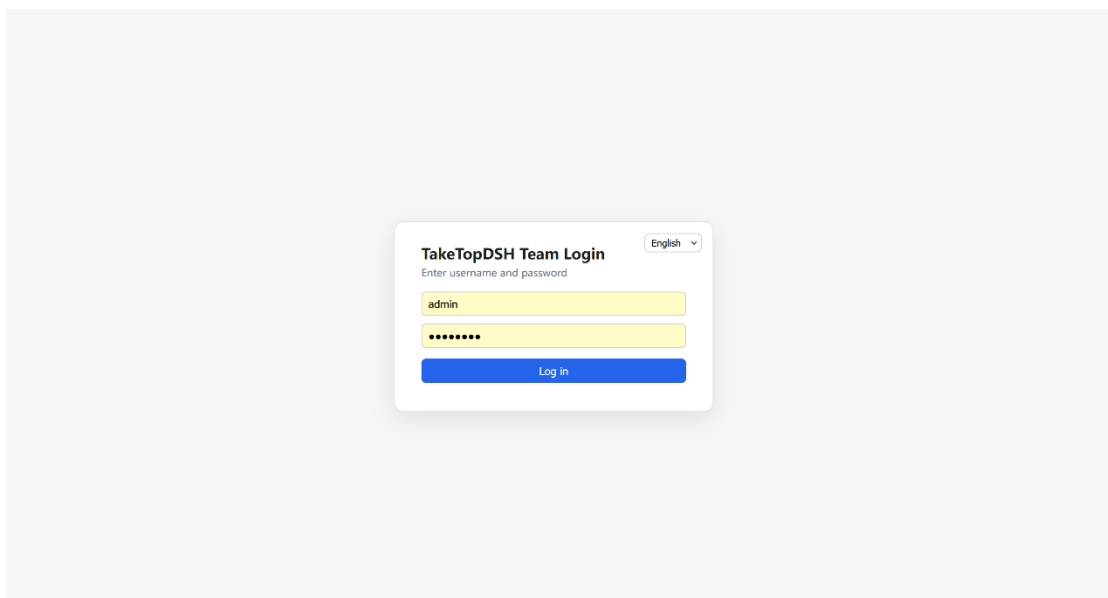

Enter username `admin` and password `12345678` to log in. After the first login, the TakeTopDSH Team background service TakeTopDSHLauncher keeps running in the background. As long as you have not rebooted, just open `http://127.0.0.1:46001` in the browser to return to the login page. If the launcher has been closed (e.g., after a

reboot), you need to run the start program above again.<http://127.0.0.1:46001>

3. Administration Page

After the admin user logs in, you will see the page below. This is the admin user's administration page.

admin (admin)Change PasswordLogoutEnglish

TakeTopDSH Team Launcher

Port46000StartStopOpen DSH

Running (PID 19596)

Configuration

appsettings URLhttp://127.0.0.1:46000Save

External URLe.g. http://server-ip:8080, empty = disabl

Workspace pathE:\WorkBuddy\WorkSpaceBrowseSave

defaultLangEnglishSave

Instance Manager (multi-user)

UsernameuserASpaceLeave empty = auto global workPassword*****Create instance

Username	Port	Workspace	State	Actions
ericliu	46002	E:\WorkBuddy\WorkSpace\ericliu	Running	OpenStopDeleteReset Password

Instance Manager (multi-user)

Username
Workspace
Password
Create instance

Username	Port	Workspace	State	Actions
ericliu	46002	E:\WorkBuddy\WorkSpace\ericliu	Running	Open Stop Delete Reset Password

My Instance

Username: ericliu
Port: 46002
State: Running
Stop
Open DSH

Update

Check Update

Logs

Clear

```

experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 01:10:11] [backup] [convert-sessions] done (3 day file(s), ok)
[2026-09-09 01:11:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-04.md (1 sessions)
[2026-09-09 01:11:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 01:11:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 01:11:11] [backup] [convert-sessions] done (3 day file(s), ok)
[2026-09-09 01:12:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-04.md (1 sessions)
[2026-09-09 01:12:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 01:12:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-

```

You can: Start/Stop, Open DSH, Configure, Manage Instances, Change Password. The key parts are described below; the rest is self-explanatory.

3-1、 Configuration

Configuration

appsettings URL
Save

External URL

Workspace path
Browse
Save

defaultLang
Save

3-1-1. Set the Workspace path

Setting the Workspace path defines the platform's workspace directory. Note that this directory can be on any drive on the computer, but plan it well and ensure it has enough capacity, because all data you enter and all files you upload in TakeTopDSH Team are stored under this directory.

3-1-2. Set the External URL

The External URL applies if you also want to use the platform from outside the network. Give the server a public IP, then enter it here. For example, if the public IP is 188.88.88.88, you can set it as <http://188.88.88.88:46000>. If you are unsure, ask your network administrator to make sure it is configured correctly.<http://188.88.88.88:46000>

3-2、 Add Member Users

Username	Port	Workspace	State	Actions
ericliu	46002	E:\WorkBuddy\WorkSpace\ericliu	Running	<button>Open</button> <button>Stop</button> <button>Delete</button> <button>Reset Password</button>

My Instance
Username: ericliu Port: 46002 State: Running Stop Open DSH

You can add member users here. Note that usernames should use English letters, not Chinese. Remember the password you set for a user, for example set it to `12345678`. After a member user logs in, they can change it themselves. You do not need to set this member's workspace directory — it is generated automatically from the main workspace directory + username.


3-3、 Platform Update

Update
Check Update


Because TakeTopDSH Team is an AI collaboration platform built on DeepSeek Harness, after DeepSeek Harness releases a new version, you can click this button to upgrade and ensure you are using the latest DeepSeek Harness features.

4. DSH Workbench

After completing the settings on the administration page, click the ****Open DSH**** button in the TakeTopDSH Team Launcher section to open the workbench page.

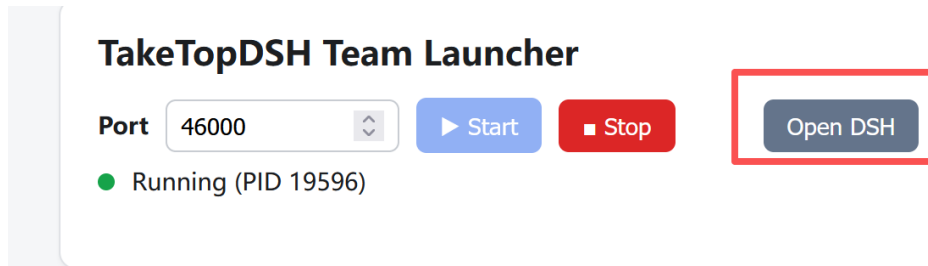


The workbench page is shown below, split left and right: the file manager / my tasks on the left, and the DSH chat interface on the right.

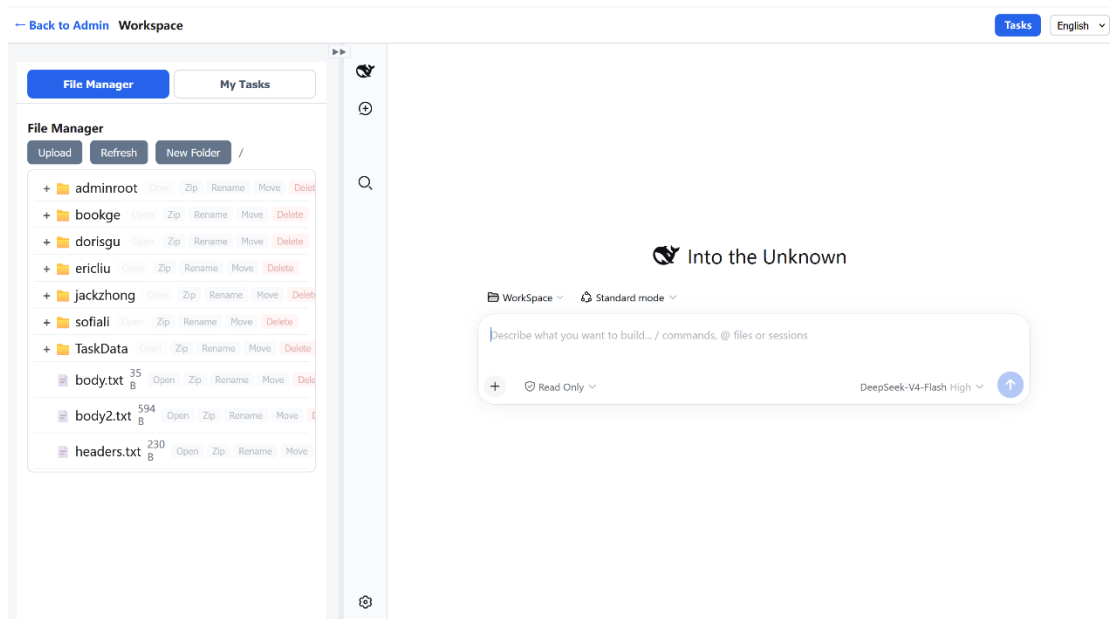


4-1. Configure the AI LLM API Key

Although TakeTopDSH Team is built on DeepSeek Harness, you can also connect other LLMs, such as OpenAI, Kimi, Claude, Qwen, etc., and even local models.


First, click the settings icon in the bottom-left of the right sidebar to open the settings page, as shown below. 

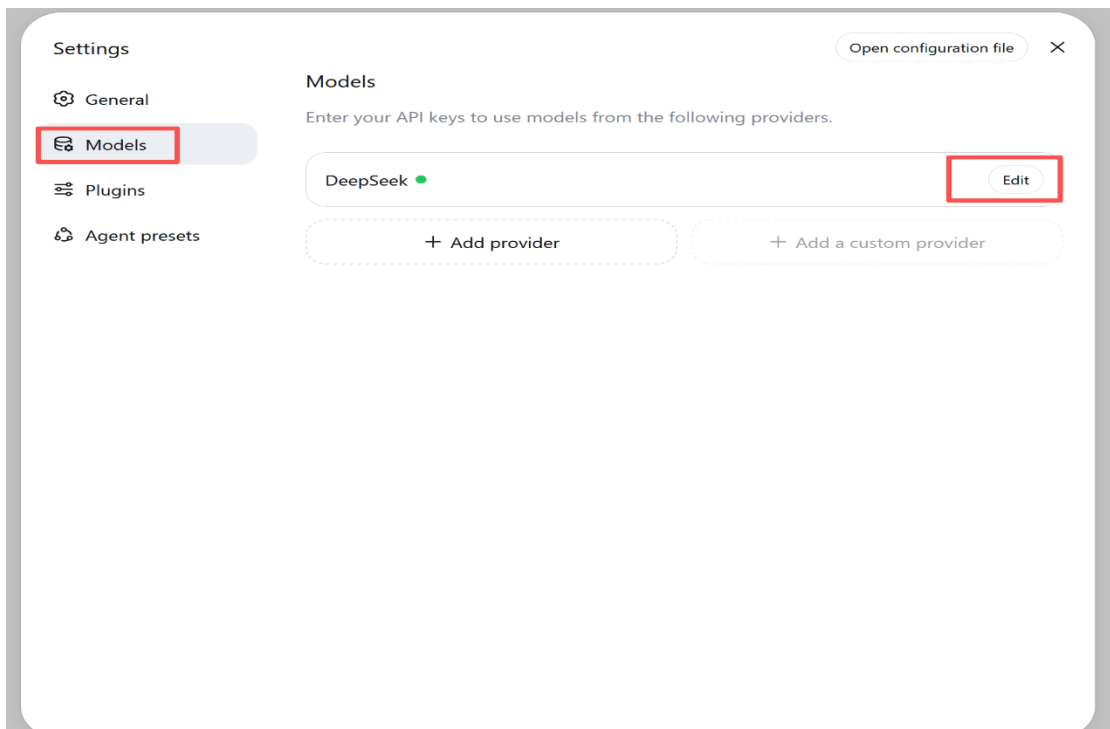

Click the Edit button, as shown below. You can choose from the listed models, or click Add model to add one. After selecting, enter the API Key you obtained. You can learn how to set it up on the website of the LLM you plan to connect.

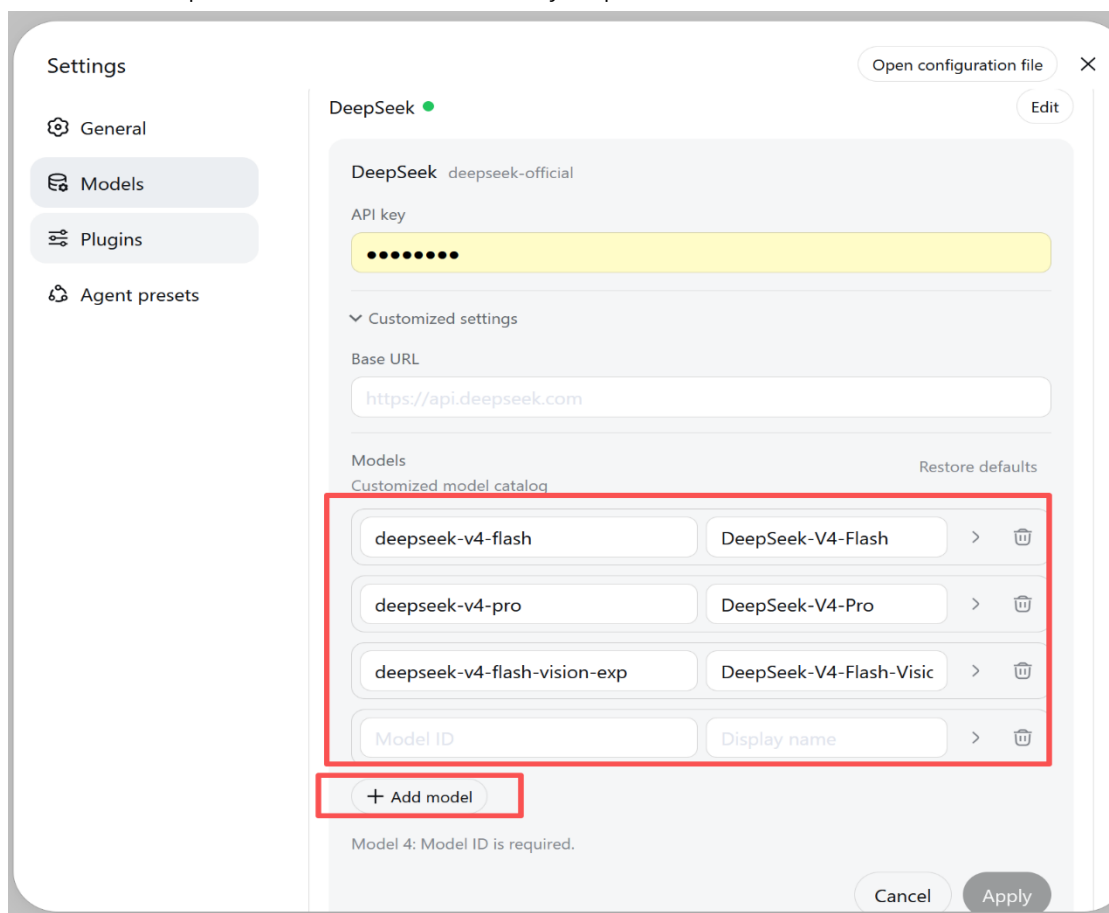


Once you have set the LLM's API Key, you can use DSH for AI conversations, as shown below.

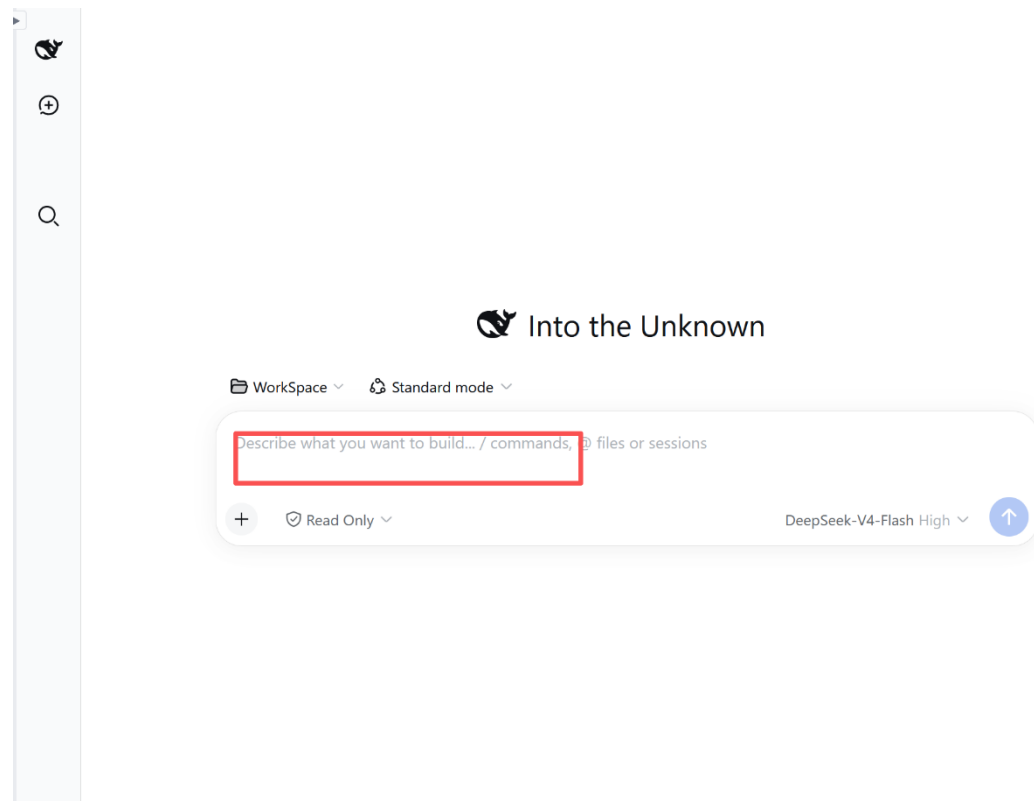



4-2. File Manager

The first tab in the left sidebar of the workbench is your file manager, as shown below. It shows the files under your workspace directory. You can only operate on files in this workspace directory. You can upload files you want to work on into this directory (multiple files allowed), and you can open, download, move, rename, delete, etc. **You can also drag the file name of a selected file into the DSH input box on the right.**

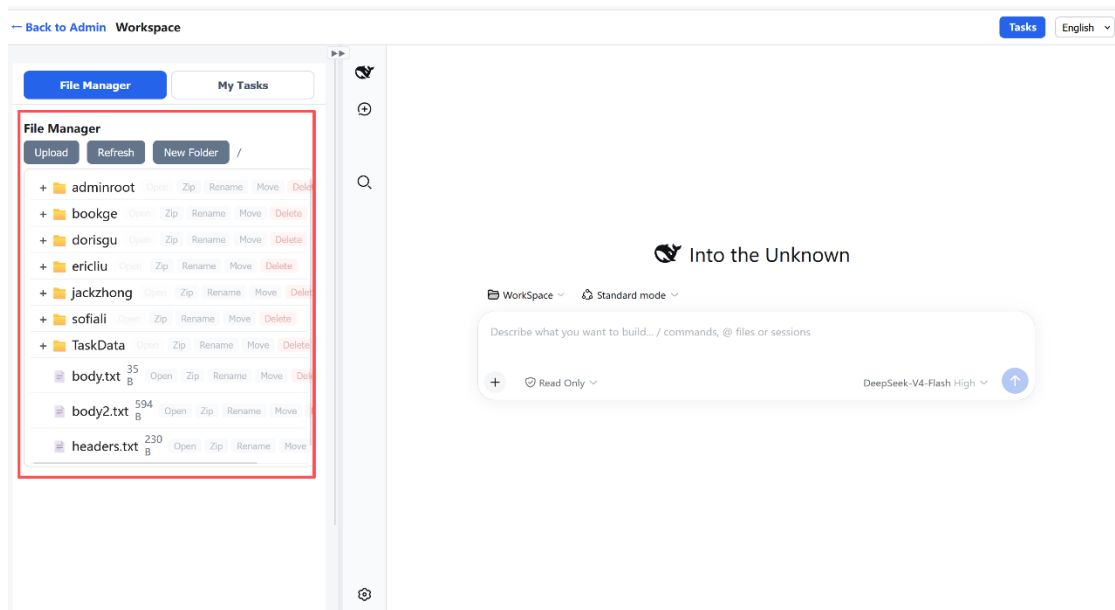


4-3. My Tasks. Click the My Tasks tab, as shown below. It shows the list of tasks assigned to you. Opening the page automatically widens the left pane to 70% for easier reading. The “No.” column shows the task's position in the hierarchy (1, 1-1, 1-2-1, …). From here you can: preview a task by clicking its name; drag a task name into the AI dialog to start working on it; click Continue Assign to create a follow-up (child) task for another member (the sub-task is added to that member's list, and the parent task expands automatically after saving); click + in the subtask column to expand a task's sub-task tree inline (multi-level; no + if the task has no children); and use Edit / Delete, which are shown only for tasks you created and only when the task has no children. You can also click Feedback to give feedback, and paste images or use Attach file to add attachments.

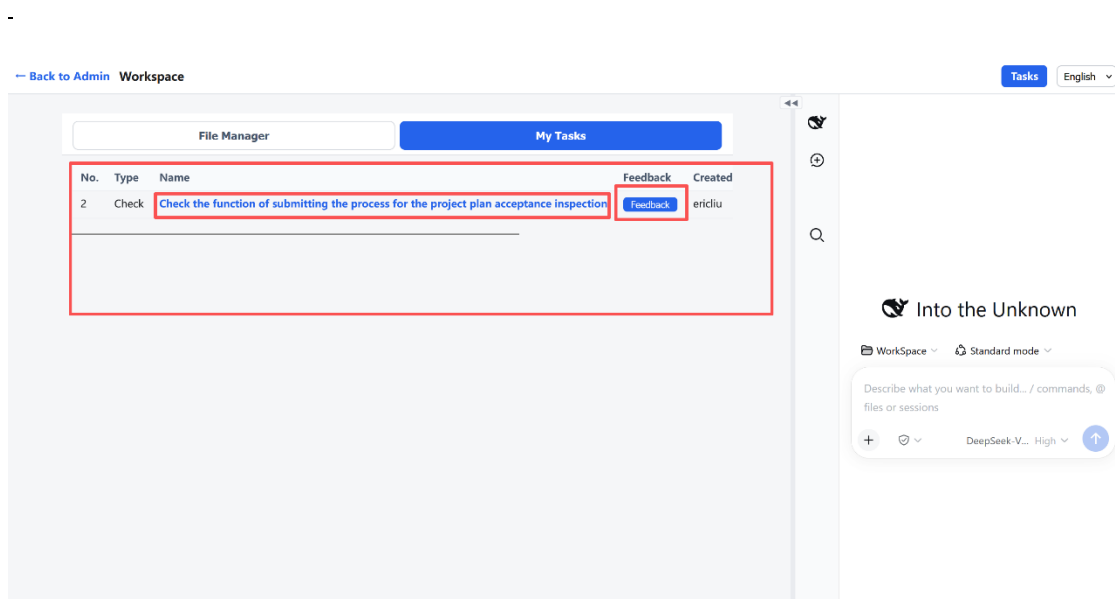

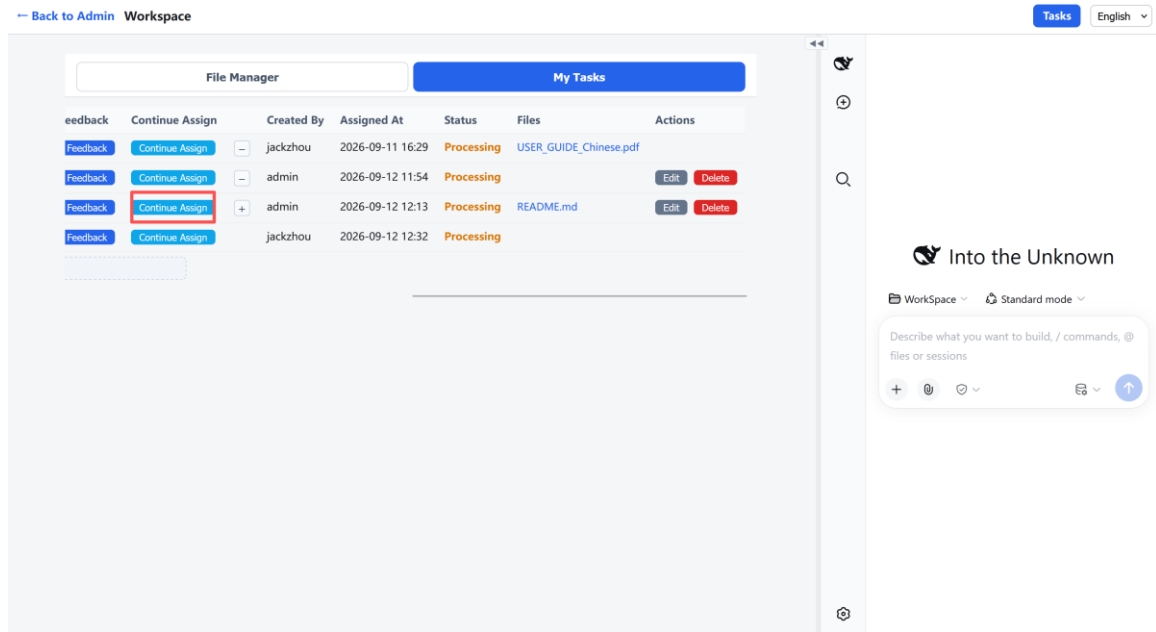



My Tasks — Continue Assign, the subtask tree, and Edit / Delete.

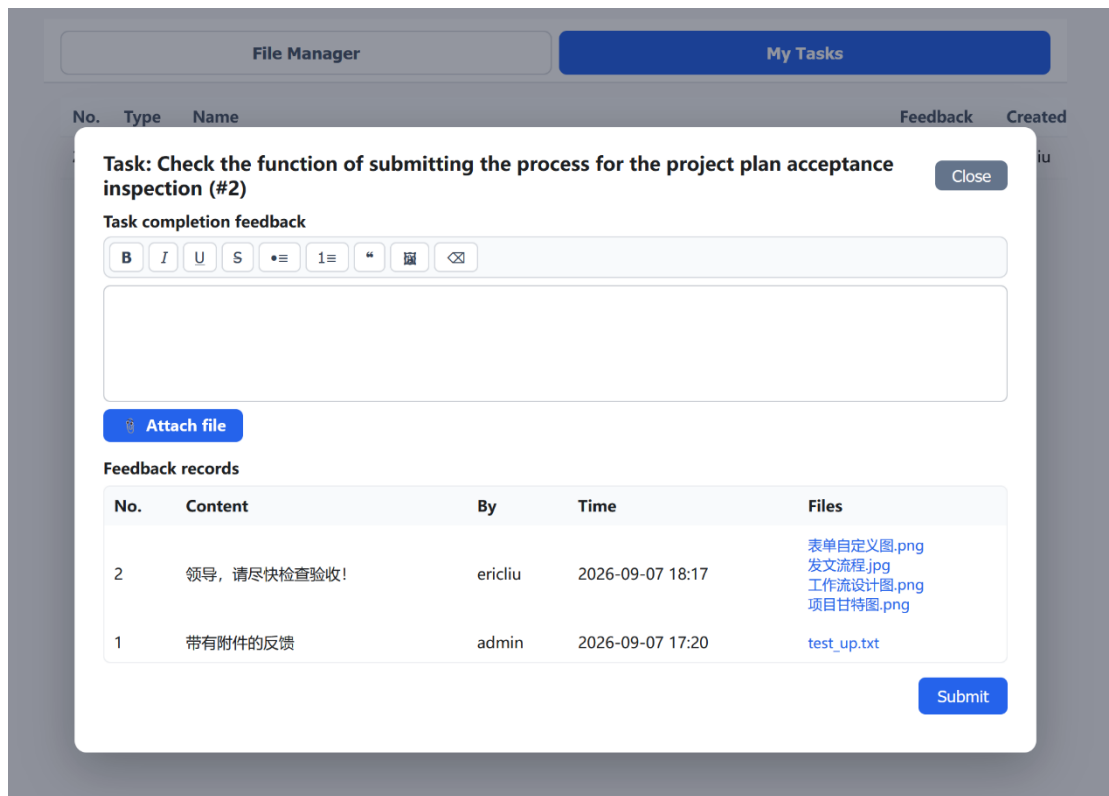


The input box above accepts text and pasted images. Click the Attach file button below to upload attachments.

4-4. Task Assignment. Click the "Task Assignment" button at the top-right of the page to open the task assignment page, as shown below.


It shows all the tasks you have created. The member list on the left is optional (used for filtering). Click the Add Task button to open the dialog and choose the assignee from the Assignee dropdown. The Type field has a text box plus a dropdown and a + button: pick an existing type, or enter a new one and click + to add it (types are remembered). When editing a task you can also change its Assignee; on save, the task is moved to the new assignee's task list. Every task row has a + column for expanding its sub-tasks inline; each child task stores its parent task's unique ID (UID) and the "No." column shows the hierarchy (1, 1-1, 1-2-1, ...). Tasks without children show no +.

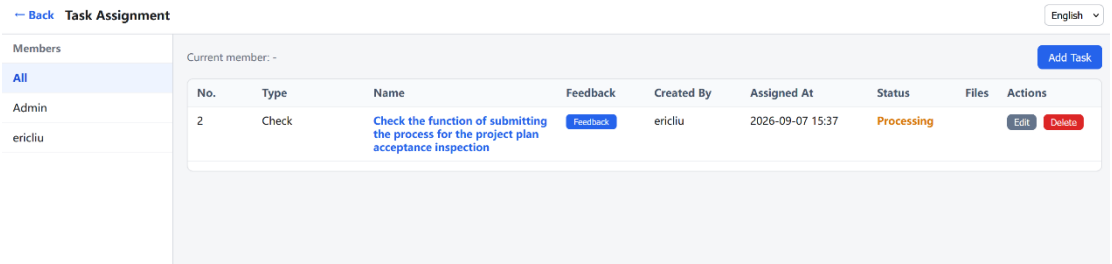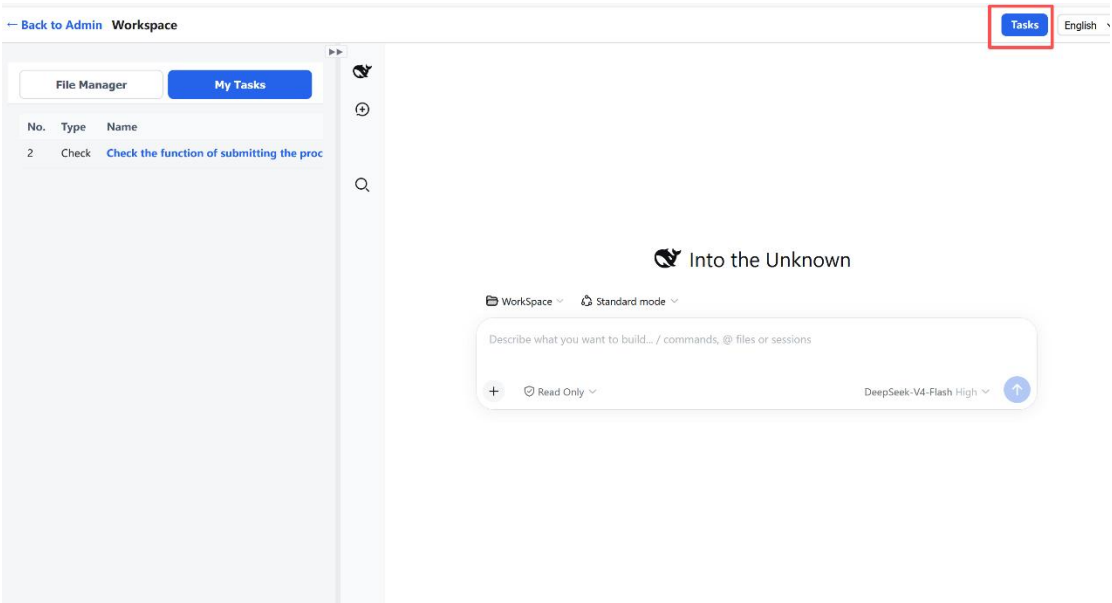

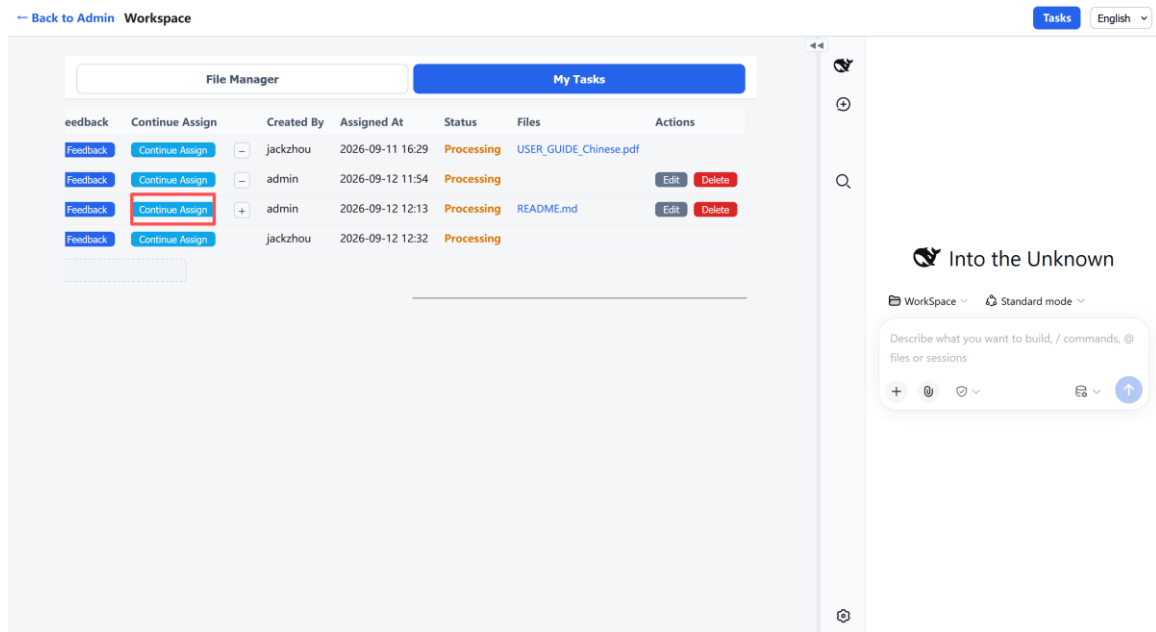

Task assignment — expand a task's sub-tasks inline with the “+” column.

You can also click the Feedback button in the task list to evaluate how that member completed the task, entering your requirements and comments, as shown below. The operation is the same as above.

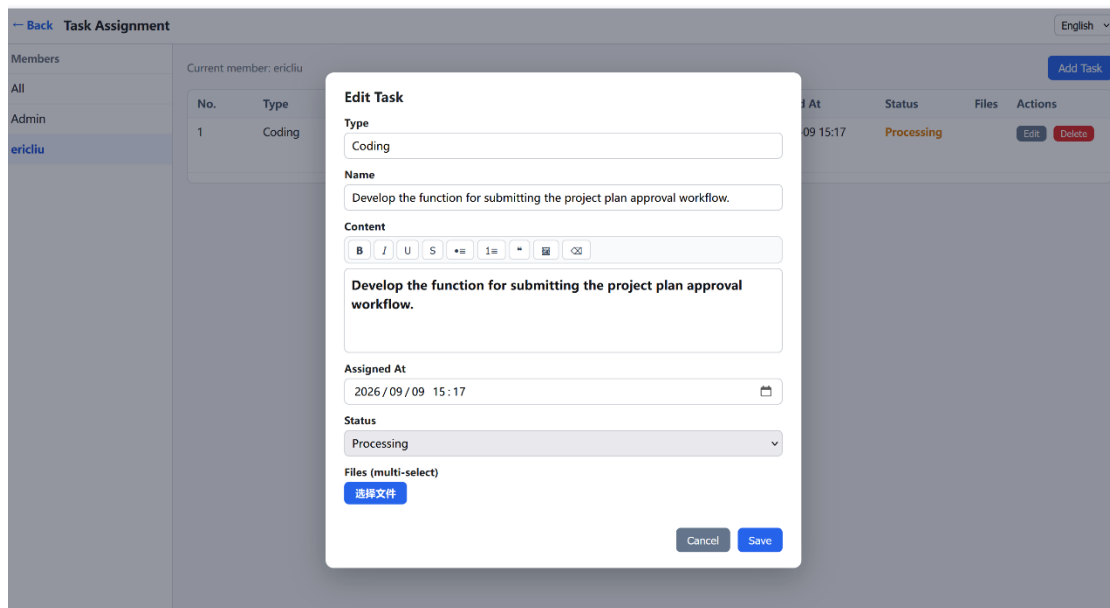

5. Other Member Operations

File Manager

My Tasks

No.	Type	Name	Feedback	Created															
Task: Check the function of submitting the process for the project plan acceptance inspection (#2) Close Task completion feedback B I U S 1= " 窗 ✕ Attach file Feedback records <table> <thead> <tr> <th>No.</th> <th>Content</th> <th>By</th> <th>Time</th> <th>Files</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>领导，请尽快检查验收！</td> <td>ericliu</td> <td>2026-09-07 18:17</td> <td> 表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png </td> </tr> <tr> <td>1</td> <td>带有附件的反馈</td> <td>admin</td> <td>2026-09-07 17:20</td> <td> test_up.txt </td> </tr> </tbody> </table> Submit					No.	Content	By	Time	Files	2	领导，请尽快检查验收！	ericliu	2026-09-07 18:17	表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png	1	带有附件的反馈	admin	2026-09-07 17:20	test_up.txt
No.	Content	By	Time	Files															
2	领导，请尽快检查验收！	ericliu	2026-09-07 18:17	表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png															
1	带有附件的反馈	admin	2026-09-07 17:20	test_up.txt															

A member added by the admin on the administration page, for example the ericliu added earlier, can also log in from the login page and enter the member's administration page, as shown below. It is simpler than the admin (admin user)'s page.

On this page, you can click the Start button to start the DSH service. The first start may be slower; after it starts, you can open the member's DSH page, as shown below. The operation is the same as the admin's, but note that the member can only work in their own file workspace and cannot see the files of other workspaces.

ericliu

Change Password

Logout

English

My Instance

Username: ericliu

Port: 46002

State: Stopped

Start

Logs

Clear

```


experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 02:20:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 02:20:26] [backup] [convert-sessions] done (3 day file(s), ok)
[2026-09-09 02:21:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-04.md (1 sessions)
[2026-09-09 02:21:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 02:21:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 02:21:26] [backup] [convert-sessions] done (3 day file(s), ok)
[2026-09-09 02:22:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-04.md (1 sessions)
[2026-09-09 02:22:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 02:22:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 02:22:26] [backup] [convert-sessions] done (3 day file(s), ok)

```

DSH Root: F:\WorkBuddy\TakeTopDshTeam

6. DSH Operations

After you are familiar with the functions on the pages above, you can use this AI Harness for work. For example, to modify a code file in the workspace directory, you can directly enter the modification instruction you want in the Harness input box, as shown below, then click the submit arrow button; it will call the connected LLM to do the work.

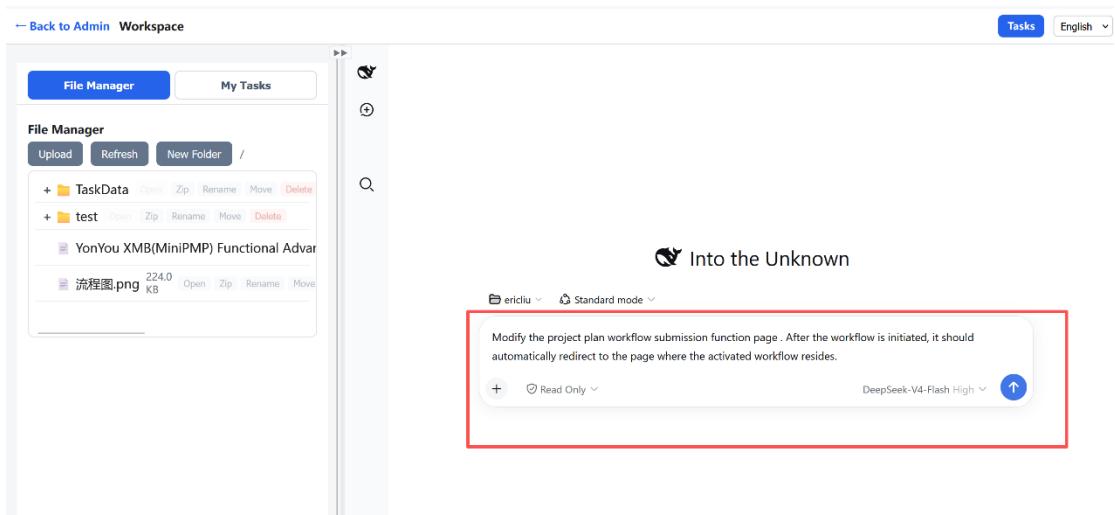

Of course, besides software development, you can also do other work, such as modifying a PPT file, creating a contract file, etc., and you can also complete tasks assigned to you by others here.

7. Language

Full English / Chinese toggle across the console, workbench, file manager, task assignment, and task form. The login page prefers the configured default language, and you can switch anytime.

8. Platform Support

TakeTopDSHTeam is cross-platform: a single package covers Windows, macOS and Linux and installs fully offline — no compilation and no extra downloads on the target machine.

Platform	Node	@deepseek-ai/dsh deps
Windows x64	bundled, offline	bundled, offline
macOS / Linux (x64 & arm64)	bundled (tar, offline)	bundled (offline tarball); falls back to npm install only if the

		bundle is missing
--	--	-------------------

9. License

This project is licensed under the Business Source License 1.1 (BSL 1.1) — a source-available license (not OSI open source). See LICENSE / COPYING.

- You may copy, modify, create derivative works, redistribute, and make non-production use of the software.
- Additional Use Grant: production use is free for an organization with up to 10 users; above 10 users a commercial license is required, priced at USD 10 per additional user per month (e.g. 11 users = USD 10/month; 15 users = USD 50/month; 20 users = USD 100/month) — contact service@taketopits.com.
- Automatic conversion: on the Change Date (2030-09-11) — or the fourth anniversary of a version's first public release, whichever is earlier — that version converts to the Apache License, Version 2.0 (fully open source), per version.

The intellectual property of this software is vested in 泰顶拓鸿信息科技（上海）有限公司 (TakeTop Information Technology (Shanghai) Co., Ltd.), Email: service@taketopits.com. All rights reserved.