

IP Addressing and Subnetting

Workbook
Version 1.5

11111110

10010101

00011011

10000110

11010011

Student Name:

IP Address Classes

Class A	1 – 127	(Network 127 is reserved for loopback and internal testing)	
	Leading bit pattern	0	00000000.00000000.00000000.00000000 Network . Host . Host . Host
Class B	128 – 191	Leading bit pattern	10
			10000000.00000000.00000000.00000000 Network . Network . Host . Host
Class C	192 – 223	Leading bit pattern	110
			11000000.00000000.00000000.00000000 Network . Network . Network . Host
Class D	224 – 239	(Reserved for multicast)	
Class E	240 – 255	(Reserved for experimental, used for research)	

Private Address Space

Class A	10.0.0.0 to 10.255.255.255
Class B	172.16.0.0 to 172.31.255.255
Class C	192.168.0.0 to 192.168.255.255

Default Subnet Masks

Class A	255.0.0.0
Class B	255.255.0.0
Class C	255.255.255.0

Produced by: Robb Jones
jonesr@careertech.net
Frederick County Career & Technology Center
Cisco Networking Academy
Frederick County Public Schools
Frederick, Maryland, USA

Special Thanks to Melvin Baker and Jim Dorsch
for taking the time to check this workbook for errors,
and to everyone who has sent in suggestions to improve the series.

Workbooks included in the series:

IP Addressing and Subnetting Workbooks
ACLs - Access Lists Workbooks
VLSM Variable-Length Subnet Mask IWorkbooks

Binary To Decimal Conversion

128	64	32	16	8	4	2	1	Answers	Scratch Area
1	0	0	1	0	0	1	0	<u>146</u>	<u>128</u> 64
0	1	1	1	0	1	1	1	<u>119</u>	16 32
1	1	1	1	1	1	1	1	<u>255</u>	<u>2</u> 16
1	1	0	0	0	1	0	1	<u>197</u>	<u>146</u> 4
1	1	1	1	0	1	1	0	<u>246</u>	2
0	0	0	1	0	0	1	1	<u>19</u>	<u>1</u>
1	0	0	0	0	0	0	1	<u>129</u>	<u>119</u>
0	0	1	1	0	0	0	1	<u>49</u>	
0	1	1	1	1	0	0	0	<u>120</u>	
1	1	1	1	0	0	0	0	<u>240</u>	
0	0	1	1	1	0	1	1	<u>59</u>	
0	0	0	0	0	1	1	1	<u>7</u>	
							00011011	<u>27</u>	
							10101010	<u>170</u>	
							01101111	<u>111</u>	
							11111000	<u>248</u>	
							00100000	<u>32</u>	
							01010101	<u>85</u>	
							00111110	<u>62</u>	
							00000011	<u>3</u>	
							11101101	<u>237</u>	
							11000000	<u>192</u>	

Decimal To Binary Conversion

Use all 8 bits for each problem

128	64	32	16	8	4	2	1 =	255	Scratch Area	
1	1	1	0	1	1	1	0	238	238	34
0	0	1	0	0	0	1	0	34	-128	-32
01111011								123	110	2
00110010								50	-64	-2
11111111								255	46	0
11001000								200	-32	
00001010								10	14	
10001010								138	-8	
00000001								1	6	
00001101								13	-4	
11111010								250	2	
01101001								107	-2	
1110000								224	0	
01110010								114		
11000000								192		
10101100								172		
01100100								100		
01110111								119		
00110111								57		
01100010								98		
10110011								179		
00000010								2		

Address Class Identification

Address	Class
10.250.1.1	<u>A</u>
150.10.15.0	<u>B</u>
192.14.2.0	<u>C</u>
148.17.9.1	<u>B</u>
193.42.1.1	<u>C</u>
126.8.156.0	<u>A</u>
220.200.23.1	<u>C</u>
230.230.45.58	<u>D</u>
177.100.18.4	<u>B</u>
119.18.45.0	<u>A</u>
249.240.80.78	<u>E</u>
199.155.77.56	<u>C</u>
117.89.56.45	<u>A</u>
215.45.45.0	<u>C</u>
199.200.15.0	<u>C</u>
95.0.21.90	<u>A</u>
33.0.0.0	<u>A</u>
158.98.80.0	<u>B</u>
219.21.56.0	<u>C</u>

Network & Host Identification

Circle the network portion
of these addresses:

177.100.18.4

119.18.45.0

209.240.80.78

199.155.77.56

117.89.56.45

215.45.45.0

192.200.15.0

95.0.21.90

33.0.0.0

158.98.80.0

217.21.56.0

10.250.1.1

150.10.15.0

192.14.2.0

148.17.9.1

193.42.1.1

126.8.156.0

220.200.23.1

Circle the host portion of
these addresses:

10.15.123.50

171.2.199.31

198.125.87.177

223.250.200.222

17.45.222.45

126.201.54.231

191.41.35.112

155.25.169.227

192.15.155.2

123.102.45.254

148.17.9.155

100.25.1.1

195.0.21.98

25.250.135.46

171.102.77.77

55.250.5.5

218.155.230.14

10.250.1.1

Network Addresses

Using the IP address and subnet mask shown write out the network address:

188.10.18.2 255.255.0.0	<i>188 . 10 . 0 . 0</i> _____
10.10.48.80 255.255.255.0	<i>10 . 10 . 48 . 0</i> _____
192.149.24.191 255.255.255.0	192.149.24.0 _____
150.203.23.19 255.255.0.0	150.203.0.0 _____
10.10.10.10 255.0.0.0	10.0.0.0 _____
186.13.23.110 255.255.255.0	186.13.23.0 _____
223.69.230.250 255.255.0.0	223.69.0.0 _____
200.120.135.15 255.255.255.0	200.120.135.0 _____
27.125.200.151 255.0.0.0	27.0.0.0 _____
199.20.150.35 255.255.255.0	199.20.150.0 _____
191.55.165.135 255.255.255.0	191.55.165.0 _____
28.212.250.254 255.255.0.0	28.212.0.0 _____

Host Addresses

Using the IP address and subnet mask shown write out the host address:

188.10.18.2 255.255.0.0	<i>0 . 0 . 18 . 2</i>
10.10.48.80 255.255.255.0	<i>0 . 0 . 0 . 80</i>
222.49.49.11 255.255.255.0	0.0.0.11
128.23.230.19 255.255.0.0	0.0.230.19
10.10.10.10 255.0.0.0	0.10.10.10
200.113.123.11 255.255.255.0	0.0.0.11
223.169.23.20 255.255.0.0	0.0.23.20
203.20.35.215 255.255.255.0	0.0.0.215
117.15.2.51 255.0.0.0	0.15.2.51
199.120.15.135 255.255.255.0	0.0.0.135
191.55.165.135 255.255.255.0	0.0.0.135
48.21.25.54 255.255.0.0	0.0.25.54

Default Subnet Masks

Write the correct default subnet mask for each of the following addresses:

177.100.18.4	<i>255 . 255 . 0 . 0</i>
119.18.45.0	<i>255 . 0 . 0 . 0</i>
191.249.234.191	255.255.0.0
223.23.223.109	255.255.255.0
10.10.250.1	255.0.0.0
126.123.23.1	255.0.0.0
223.69.230.250	255.255.255.0
192.12.35.105	255.255.255.0
77.251.200.51	255.0.0.0
189.210.50.1	255.255.0.0
88.45.65.35	255.0.0.0
128.212.250.254	255.255.0.0
193.100.77.83	255.255.255.0
125.125.250.1	255.0.0.0
1.1.10.50	255.0.0.0
220.90.130.45	255.255.255.0
134.125.34.9	255.0.0.0
95.250.91.99	255.0.0.0

ANDING with Default subnet masks

Every IP address must be accompanied by a subnet mask. By now you should be able to look at an IP address and tell what class it is. Unfortunately your computer doesn't think that way. For your computer to determine the network and subnet portion of an IP address it must "AND" the IP address with the subnet mask.

Default Subnet Masks:

Class A	255.0.0.0
Class B	255.255.0.0
Class C	255.255.255.0

ANDING Equations:

1 AND 1	= 1
1 AND 0	= 0
0 AND 1	= 0
0 AND 0	= 0

Sample:

What you see...

IP Address: 192 . 100 . 10 . 33

What you can figure out in your head...

Address Class:	C
Network Portion:	<u>192 . 100 . 10</u> . 33
Host Portion:	192 . 100 . 10 . <u>33</u>

In order for your computer to get the same information it must AND the IP address with the subnet mask in binary.

	Network	Host	
IP Address:	1 1 0 0 0 0 0 0 . 0 1 1 0 0 1 0 0 . 0 0 0 0 1 0 1 0	0 0 1 0 0 0 0 1	(192 . 100 . 10 . 33)
Default Subnet Mask:	1 1 1 1 1 1 1 1 . 0 1 1 1 1 1 1 1 . 1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	(255 . 255 . 255 . 0)
AND:	1 1 0 0 0 0 0 0 . 0 1 1 0 0 1 0 0 . 0 0 0 0 1 0 1 0	0 0 0 0 0 0 0 0	(192 . 100 . 10 . 0)


ANDING with the default subnet mask allows your computer to figure out the network portion of the address.

ANDING with Custom subnet masks

When you take a single network such as 192.100.10.0 and divide it into five smaller networks (192.100.10.16, 192.100.10.32, 192.100.10.48, 192.100.10.64, 192.100.10.80) the outside world still sees the network as 192.100.10.0, but the internal computers and routers see five smaller subnetworks. Each independent of the other. This can only be accomplished by using a custom subnet mask. A custom subnet mask borrows bits from the host portion of the address to create a subnetwork address between the network and host portions of an IP address. In this example each range has 14 usable addresses in it. The computer must still AND the IP address against the custom subnet mask to see what the network portion is and which subnetwork it belongs to.

IP Address: 192 . 100 . 10 . 0
Custom Subnet Mask: 255.255.255.240

Address Ranges: 192.10.10.0 to 192.100.10.15
 192.100.10.16 to 192.100.10.31
 192.100.10.32 to 192.100.10.47 (Range in the sample below)
 192.100.10.48 to 192.100.10.63
 192.100.10.64 to 192.100.10.79
 192.100.10.80 to 192.100.10.95
 192.100.10.96 to 192.100.10.111
 192.100.10.112 to 192.100.10.127
 192.100.10.128 to 192.100.10.143
 192.100.10.144 to 192.100.10.159
 192.100.10.160 to 192.100.10.175
 192.100.10.176 to 192.100.10.191
 192.100.10.192 to 192.100.10.207
 192.100.10.208 to 192.100.10.223
 192.100.10.224 to 192.100.10.239
 192.100.10.240 to 192.100.10.255

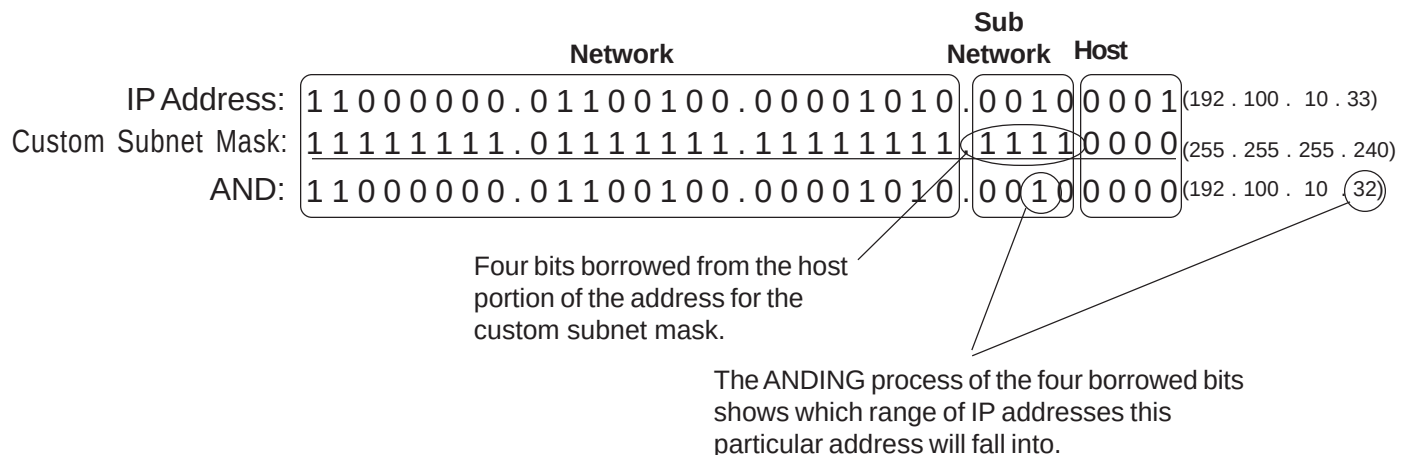

In the next set of problems you will determine the necessary information to determine the correct subnet mask for a variety of IP addresses.

How to determine the number of subnets and the number of hosts per subnet

Two formulas can provide this basic information:

Number of subnets = 2^s (Second subnet formula: **Number of subnets = $2^s - 2$**)

Number of hosts per subnet = $2^h - 2$

Both formulas calculate the number of hosts or subnets based on the number of binary bits used. For example if you borrow three bits from the host portion of the address use the *number of subnets* formula to determine the total number of subnets gained by borrowing the three bits. This would be 2^3 or $2 \times 2 \times 2 = 8$ subnets

To determine the number of hosts per subnet you would take the number of binary bits used in the host portion and apply this to the *number of hosts per subnet* formula. If five bits are in the host portion of the address this would be 2^5 or $2 \times 2 \times 2 \times 2 \times 2 = 32$ hosts.

When dealing with the *number of hosts per subnet* you have to subtract two addresses from the range. The first address in every range is the subnet number. The last address in every range is the broadcast address. These two addresses cannot be assigned to any device in the network which is why you have to subtract two addresses to find the number of usable addresses in each range.

For example if two bits are borrowed for the network portion of the address you can easily determine the number of subnets and hosts per subnets using the two formulas.

195. 223 . 50 . 0 0 | 0 0 0 0 0 0

The number of subnets created by borrowing 2 bits is 2^2 or $2 \times 2 = 4$ subnets.

The number of hosts created by leaving 6 bits is $2^6 - 2$ or $2 \times 2 \times 2 \times 2 \times 2 \times 2 = 64 - 2 = 62$ usable hosts per subnet.

What about that second subnet formula:

Number of subnets = $2^s - 2$

In some instances the first and last subnet range of addresses are reserved. This is similar to the first and last host addresses in each range of addresses.

The first range of addresses is the **zero subnet**. The subnet number for the *zero subnet* is also the subnet number for the classful subnet address.

The last range of addresses is the **broadcast subnet**. The broadcast address for the last subnet in the *broadcast subnet* is the same as the classful broadcast address.

Class C Address unsubnetted:

195. 223 . 50 . 0

195.223.50.0 to 195.223.50.255

Class C Address subnetted (2 bits borrowed):

195. 223 . 50 . 0 0 | 0 0 0 0 0 0

(Invalid range) (0) 195.223.50.0 to 195.223.50.63
(1) 195.223.50.64 to 195.223.50.127
(2) 195.223.50.128 to 195.223.50.191
(Invalid range) (3) 195.223.50.192 to 195.223.50.255

Notice that the subnet and broadcast addresses match.

The primary reason the the zero and broadcast subnets were not used had to do primarily with the broadcast addresses. If you send a broadcast to 195.223.255 are you sending it to all 255 addresses in the classful C address or just the 62 usable addresses in the broadcast range?

The **CCNA** and **CCENT** certification exams may have questions which will require you to determine which formula to use, and whehter or not you can use the first and last subnets. Use the chart below to help decide.

When to use which formula to determine the number of subnets	
Use the $2^S - 2$ formula and <u>don't use</u> the zero and broadcast ranges if...	Use the 2^S formula and <u>use</u> the zero and broadcast ranges if...
Classful routing is used	Classless routing or VLSM is used
RIP version 1 is used	RIP version 2, EIGRP, or OSPF is used
The no ip subnet zero command is configured on your router	The ip subnet zero command is configured on your router (default setting)
	No other clues are given

Bottom line for the CCNA exams; if a question does not give you any clues as to whether or not to allow these two subnets, assume you can use them.

This workbook has you use the number of subnets = 2^S formula.

Custom Subnet Masks

Problem 1

Number of needed subnets **14**
 Number of needed usable hosts **14**
 Network Address **192.10.10.0**

Address class C

Default subnet mask 255 . 255 . 255 . 0

Custom subnet mask 255 . 255 . 255 . 240

Total number of subnets 16

Total number of host addresses 16

Number of usable addresses 14

Number of bits borrowed 4

Show your work for Problem 1 in the space below.

	256	128	64	32	16	8	4	2	1	Number of Hosts
Number of Subnets	-	2	4	8	16	32	64	128	256	
	128	64	32	16	8	4	2	1	-	Binary values
192 . 10 . 10 . 0	0	0	0	0	0	0	0	0	0	

Add the binary value numbers to the left of the line to create the custom subnet mask.

128
64
32
+16
240

16	Observe the total number of hosts.
-2	
14	Subtract 2 for the number of usable hosts.

Custom Subnet Masks

Problem 2

Number of needed subnets **1000**

Number of needed usable hosts **60**

Network Address **165.100.0.0**

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

Show your work for Problem 2 in the space below.

Number of Hosts -	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Subnets -	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Binary values -	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
	165	100	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Add the binary value numbers to the left of the line to create the custom subnet mask.

128	128
64	+64
32	192
16	
8	
4	
2	
+1	
255	

Observe the total number of hosts.

Subtract 2 for the number of usable hosts.

64
-2
62

Custom Subnet Masks

Problem 3

Network Address **148.75.0.0 /26**

/26 indicates the total number of bits used for the network and subnetwork portion of the address. All bits remaining belong to the host portion of the address.

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

Show your work for **Problem 3** in the space below.

	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Hosts	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Number of Subnets	-	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768
Binary values	-	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2
		148	75	0	0	0	0	0	0	0	0	0	0	0	0	0

Add the binary value numbers to the left of the line to create the custom subnet mask.

128	128
64	+64
32	192
16	
8	
4	
2	
+1	
255	

64	Observe the total number of hosts.
-2	
62	Subtract 2 for the number of usable hosts.

1024	
-2	
1,022	Subtract 2 for the total number of subnets to get the usable number of subnets.

Custom Subnet Masks

Problem 4

Number of needed subnets **6**
 Number of needed usable hosts **30**
 Network Address **210.100.56.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.224

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

Show your work for Problem 4 in the space below.

		Number of Subnets					Number of Hosts					
		256	128	64	32	16	8	4	2	-		
	-	2	4	8	16	32	64	128	256			
		128	64	32	16	8	4	2	1	-	Binary values	
210	.	100	.	56	.	0	0	0	0	0		

Custom Subnet Masks

Problem 5

Number of needed subnets **6**
 Number of needed usable hosts **30**
 Network Address **195.85.8.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.224

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

Show your work for Problem 5 in the space below.

Number of Subnets				Number of Hosts									
	256	128	64	32	16	8	4	2	-				
-	2	4	8	16	32	64	128	256					
	128	64	32	16	8	4	2	1	-	Binary values			
195 . 85 . 8 .	0	0	0	0	0	0	0	0	0				

Custom Subnet Masks

Problem 7

Number of needed subnets **2000**
 Number of needed usable hosts **15**
 Network Address **178.100.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.255.224

Total number of subnets 2048

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 11

Show your work for Problem 7 in the space below.

Number of Hosts	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Subnets	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Binary values	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
178 . 100 . 0 0 0 0 0 0 0 0 . 0 0 0 0 0 0 0 0																

Custom Subnet Masks

Problem 8

Number of needed subnets **3**

Number of needed usable hosts **45**

Network Address **200.175.14.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.192

Total number of subnets 4

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 2

Show your work for Problem 8 in the space below.

Custom Subnet Masks

Problem 9

Number of needed subnets **60**

Number of needed usable hosts **1,000**

Network Address **128.77.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.252.0

Total number of subnets 64

Total number of host addresses 1024

Number of usable addresses 1022

Number of bits borrowed 6

Show your work for Problem 9 in the space below.

Custom Subnet Masks

Problem 10

Number of needed usable hosts **60**

Network Address **198.100.10.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.192

Total number of subnets 4

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 2

Show your work for Problem 10 in the space below.

Custom Subnet Masks

Problem 11

Number of needed subnets **250**

Network Address **101.0.0.0**

Address class A

Default subnet mask 255.0.0.0

Custom subnet mask 255.255.0.0

Total number of subnets 256

Total number of host addresses 65 536

Number of usable addresses 65 534

Number of bits borrowed 8

Show your work for **Problem 11** in the space below.

Custom Subnet Masks

Problem 12

Number of needed subnets **5**

Network Address **218.35.50.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.224

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

Show your work for Problem 12 in the space below.

Custom Subnet Masks

Problem 13

Number of needed usable hosts **25**

Network Address **218.35.50.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.248

Total number of subnets 32

Total number of host addresses 8

Number of usable addresses 6

Number of bits borrowed 5

Show your work for Problem 13 in the space below.

Custom Subnet Masks

Problem 14

Number of needed subnets **10**

Network Address **172.59.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.224.0

Total number of subnets 16

Total number of host addresses 4096

Number of usable addresses 4094

Number of bits borrowed 4

Show your work for Problem 14 in the space below.

Custom Subnet Masks

Problem 15

Number of needed usable hosts **50**

Network Address **172.59.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.255.192

Total number of subnets 1024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

Show your work for Problem 15 in the space below.

Custom Subnet Masks

Problem 16

Number of needed usable hosts **29**

Network Address **23.0.0.0**

Address class A

Default subnet mask 255.0.0.0

Custom subnet mask 255.255.255.224

Total number of subnets 32

Total number of host addresses 524 288

Number of usable addresses 524 286

Number of bits borrowed 5

Show your work for Problem 16 in the space below.

Subnetting

Problem 1

Number of needed subnets **14**

Number of needed usable hosts **14**

Network Address **192.10.10.0**

Address class C

Default subnet mask 255 . 255 . 255 . 0

Custom subnet mask 255 . 255 . 255 . 240

Total number of subnets 16

Total number of host addresses 16

Number of usable addresses 14

Number of bits borrowed 4

What is the 4th subnet range? 192.10.10.48 to 192.10.10.63

What is the subnet number for the 8th subnet? 192 . 10 . 10 . 112

What is the subnet broadcast address for the 13th subnet? 192 . 10 . 10 . 207

What are the assignable addresses for the 9th subnet? 192.10.10.129 to 192.10.10.142

Show your work for Problem 1 in the space below.

Number of Subnets ~					Number of Hosts				
256	128	64	32	16	32	64	128	256	
2	4	8	16		8	4	2	1	Binary values
128	64	32	16						
192	10	10	0	0	0	0	0	0	
(0)	0	0	0	0	192.10.10.0	to	192.10.10.15		
(1)	0	0	0	1	192.10.10.16	to	192.10.10.31		
(2)	0	0	1	0	192.10.10.32	to	192.10.10.47		
(3)	0	0	1	1	192.10.10.48	to	192.10.10.63		
(4)	0	1	0	0	192.10.10.64	to	192.10.10.79		
(5)	0	1	0	1	192.10.10.80	to	192.10.10.95		
(6)	0	1	1	0	192.10.10.96	to	192.10.10.111		
(7)	0	1	1	1	192.10.10.112	to	192.10.10.127		
(8)	1	0	0	0	192.10.10.128	to	192.10.10.143		
(9)	1	0	0	1	192.10.10.144	to	192.10.10.159		
(10)	1	0	1	0	192.10.10.160	to	192.10.10.175		
(11)	1	0	1	1	192.10.10.176	to	192.10.10.191		
(12)	1	1	0	0	192.10.10.192	to	192.10.10.207		
(13)	1	1	0	1	192.10.10.208	to	192.10.10.223		
(14)	1	1	1	0	192.10.10.224	to	192.10.10.239		
(15)	1	1	1	1	192.10.10.240	to	192.10.10.255		

$$\begin{array}{r}
 128 \\
 64 \\
 32 \\
 +16 \\
 \hline
 \text{Custom subnet mask } 240
 \end{array}$$

$$\begin{array}{r}
 16 \\
 -2 \\
 \hline
 \text{Usable subnets } 14
 \end{array}$$

$$\begin{array}{r}
 16 \\
 -2 \\
 \hline
 \text{Usable hosts } 14
 \end{array}$$

The binary value of the last bit borrowed is the range. In this problem the range is 16.

The first address in each subnet range is the subnet number.

The last address in each subnet range is the subnet broadcast address.

Subnetting

Problem 2

Number of needed subnets **1000**

Number of needed usable hosts **60**

Network Address **165.100.0.0**

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

What is the 15th
subnet range? 165.100.3.128 to 165.100.3.191

What is the subnet number
for the 6th subnet? 165 . 100 . 1 . 64

What is the subnet
broadcast address for
the 6th subnet? 165 . 100 . 1 . 127

What are the assignable
addresses for the 9th
subnet? 165.100.2.1 to 165.100.0.62

Show your work for Problem 2 in the space below.

Number of Hosts -	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Subnets -	2	4	8	16	32	64	128	256	512	1,024	2,048	4,096	8,192	16,384	32,768	65,536
Binary values -	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
165 . 100 . 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Usable hosts	64	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2
Custom subnet mask	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
	192	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255
The binary value of the last bit borrowed is the range. In this problem the range is 64.																
The first address in each subnet range is the subnet number.																
The last address in each subnet range is the subnet broadcast address.																
(0)	165.100.0.0	to	165.100.0.63													
(1)	165.100.0.64	to	165.100.0.127													
(2)	165.100.0.128	to	165.100.0.191													
(3)	165.100.0.192	to	165.100.0.255													
(4)	165.100.1.0	to	165.100.1.63													
(5)	165.100.1.64	to	165.100.1.127													
(6)	165.100.1.128	to	165.100.1.191													
(7)	165.100.1.192	to	165.100.1.255													
(8)	165.100.2.0	to	165.100.2.63													
(9)	165.100.2.64	to	165.100.2.127													
(10)	165.100.2.128	to	165.100.2.191													
(11)	165.100.2.192	to	165.100.2.255													
(12)	165.100.3.0	to	165.100.3.63													
(13)	165.100.3.64	to	165.100.3.127													
(14)	165.100.3.128	to	165.100.3.191													
(15)	165.100.3.192	to	165.100.3.255													
Down to																
(1022)	165.100.255.128	to	165.100.255.191													
(1023)	165.100.255.192	to	165.100.255.255													

Subnetting

Problem 3

Number of needed subnets **2**

Network Address **195.223.50.0**

Address class C

Default subnet mask /24

Custom subnet mask /25

Total number of subnets 2

Total number of host addresses 128

Number of usable addresses 126

Number of bits borrowed 1

What is the 3rd subnet range? XXXXXXXX

What is the subnet number for the 2nd subnet? 195.223.50.128

What is the subnet broadcast address for the 1st subnet? 195.223.50.127

What are the assignable addresses for the 3rd subnet? XXXXXXXX

Show your work for Problem 3 in the space below.

	256	128	64	32	16	8	4	2	-	Number of Hosts
Number of Subnets	-	2	4	8	16	32	64	128	256	
	128	64	32	16	8	4	2	1	-	Binary values

195. 223 . 50 . 0 0 0 0 0 0 0 0

Subnetting

Problem 4

Number of needed subnets **750**

Network Address **190.35.0.0**

Address class B

Default subnet mask /16

Custom subnet mask /26

Total number of subnets 1024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

What is the 15th subnet range? 190.35.3.129 - 190.35.3.190

What is the subnet number for the 13th subnet? 190.35.3.0

What is the subnet broadcast address for the 10th subnet? 190.35.2.127

What are the assignable addresses for the 6th subnet? 190.35.1.65 - 190.35.1.126

Show your work for Problem 4 in the space below.

Subnetting

Problem 5

Number of needed usable hosts **6**

Network Address **126.0.0.0**

Address class A

Default subnet mask /8

Custom subnet mask /29

Total number of subnets 2097152

Total number of host addresses 8

Number of usable addresses 6

Number of bits borrowed 21

What is the 2nd subnet range? 126.0.0.9 - 126.0.0.14

What is the subnet number for the 5th subnet? 126.0.0.32

What is the subnet broadcast address for the 7th subnet? 126.0.0.55

What are the assignable addresses for the 10th subnet? 126.0.0.73 - 126.0.0.78

Show your work for Problem 5 in the space below.

Subnetting

Problem 6

Number of needed subnets **10**

Network Address **192.70.10.0**

Address class C

Default subnet mask /24

Custom subnet mask /28

Total number of subnets 16

Total number of host addresses 16

Number of usable addresses 14

Number of bits borrowed 4

What is the 9th subnet range? 192.70.10.129 - 192.70.10.142

What is the subnet number for the 4th subnet? 192.70.10.48

What is the subnet broadcast address for the 12th subnet? 192.70.10.191

What are the assignable addresses for the 10th subnet? 192.70.10.145 - 192.70.10.158

Show your work for Problem 6 in the space below.

Subnetting

Problem 7

Network Address **10.0.0.0 /16**

Address class A

Default subnet mask /8

Custom subnet mask /16

Total number of subnets 256

Total number of host addresses 65536

Number of usable addresses 65534

Number of bits borrowed 8

What is the 11th subnet range? 10.10.0.1 - 10.10.255.254

What is the subnet number for the 6th subnet? 10.5.0.0

What is the subnet broadcast address for the 2nd subnet? 10.1.255.255

What are the assignable addresses for the 9th subnet? 10.8.0.1 - 10.8.255.254

Show your work for Problem 7 in the space below.

Subnetting

Problem 8

Number of needed subnets **5**

Network Address **172.50.0.0**

Address class B

Default subnet mask /16

Custom subnet mask /19

Total number of subnets 8

Total number of host addresses 8192

Number of usable addresses 8190

Number of bits borrowed 3

What is the 4th subnet range? 172.50.96.1 - 172.50.127.254

What is the subnet number for the 5th subnet? 172.50.128.0

What is the subnet broadcast address for the 6th subnet? 172.50.191.255

What are the assignable addresses for the 3rd subnet? 172.50.64.1 - 172.50.95.254

Show your work for Problem 8 in the space below.

Subnetting

Problem 9

Number of needed usable hosts **28**

Network Address **172.50.0.0**

Address class B

Default subnet mask /16

Custom subnet mask /27

Total number of subnets 2048

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 11

What is the 2nd subnet range? 172.50.0.33 - 172.50.0.62

What is the subnet number for the 10th subnet? 172.50.1.32

What is the subnet broadcast address for the 4th subnet? 172.50.0.127

What are the assignable addresses for the 6th subnet? 172.50.0.161 - 172.50.0.190

Show your work for Problem 9 in the space below.

Subnetting

Problem 10

Number of needed subnets **45**

Network Address **220.100.100.0**

Address class C

Default subnet mask /24

Custom subnet mask /30

Total number of subnets 64

Total number of host addresses 4

Number of usable addresses 2

Number of bits borrowed 6

What is the 5th subnet range? 220.100.100.17 - 220.100.100.18

What is the subnet number for the 4th subnet? 220.100.100.12

What is the subnet broadcast address for the 13th subnet? 220.100.100.51

What are the assignable addresses for the 12th subnet? 220.100.100.45 - 220.100.100.46

Show your work for Problem 10 in the space below.

Subnetting

Problem 11

Number of needed usable hosts **8,000**

Network Address **135.70.0.0**

Address class B

Default subnet mask /16

Custom subnet mask /19

Total number of subnets 8

Total number of host addresses 8192

Number of usable addresses 8190

Number of bits borrowed 3

What is the 6th subnet range? 135.70.160.1 - 135.70.191.254

What is the subnet number for the 7th subnet? 135.70.192.0

What is the subnet broadcast address for the 3rd subnet? 135.70.95.255

What are the assignable addresses for the 5th subnet? 135.70.128.1 - 135.70.159.254

Show your work for Problem 11 in the space below.

Subnetting

Problem 12

Number of needed usable hosts **45**

Network Address **198.125.50.0**

Address class C

Default subnet mask /24

Custom subnet mask /26

Total number of subnets 4

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 2

What is the 2nd subnet range? 198.125.50.65 - 198.125.50.126

What is the subnet number for the 2nd subnet? 198.125.50.64

What is the subnet broadcast address for the 4th subnet? 198.125.50.255

What are the assignable addresses for the 3rd subnet? 198.125.50.129 - 198.125.50.190

Show your work for Problem 12 in the space below.

Subnetting

Problem 13

Network Address **165.200.0.0 /26**

Address class B

Default subnet mask /16

Custom subnet mask /26

Total number of subnets 1024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

What is the 10th subnet range? 165.200.2.65 - 165.200.2.126

What is the subnet number for the 11th subnet? 165.200.2.128

What is the subnet broadcast address for the 1023rd subnet? 165.200.255.191

What are the assignable addresses for the 1022nd subnet? 165.200.255.65 - 165.200.255.126

Show your work for Problem 13 in the space below.

Subnetting

Problem 14

Number of needed usable hosts **16**

Network Address **200.10.10.0**

Address class C

Default subnet mask /24

Custom subnet mask /27

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

What is the 7th subnet range? 200.10.10.193 - 200.10.10.222

What is the subnet number for the 5th subnet? 200.10.10.128

What is the subnet broadcast address for the 4th subnet? 200.10.10.127

What are the assignable addresses for the 6th subnet? 200.10.10.161 - 200.10.10.190

Show your work for Problem 14 in the space below.

Subnetting

Problem 15

Network Address **93.0.0.0** \19

Address class A

Default subnet mask /8

Custom subnet mask /19

Total number of subnets 2048

Total number of host addresses 8192

Number of usable addresses 8190

Number of bits borrowed 11

What is the 15th subnet range? 93.1.192.1 - 93.1.223.254

What is the subnet number for the 9th subnet? 93.1.0.0


What is the subnet broadcast address for the 7th subnet? 93.0.223.255

What are the assignable addresses for the 12th subnet? 93.1.96.1 - 93.1.127.254

Show your work for Problem 15 in the space below.

Practical Subnetting 1

Based on the information in the graphic shown, design a network addressing scheme that will supply the minimum number of subnets, and allow enough extra subnets and hosts for 100% growth in both areas. Circle each subnet on the graphic and answer the questions below.

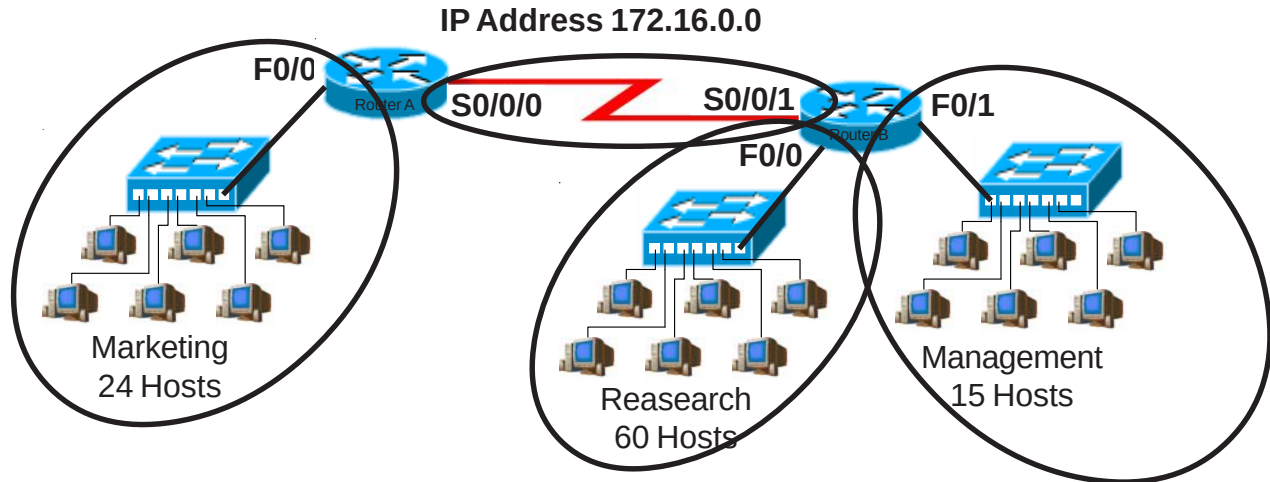

Address class	<i>B</i>
Custom subnet mask	<i>255.255.224.0</i>
Minimum number of subnets needed	<i>4</i>
Extra subnets required for 100% growth (Round up to the next whole number)	<i>+</i> <i>4</i>
Total number of subnets needed	<i>=</i> <i>8</i>
Number of host addresses in the largest subnet group	<i>60</i>
Number of addresses needed for 100% growth in the largest subnet (Round up to the next whole number)	<i>+</i> <i>60</i>
Total number of address needed for the largest subnet	<i>=</i> <i>120</i>

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.


IP address range for Research	<i>172.16.0.0 to 172.31.255</i>
IP address range for Marketing	<i>172.16.32.0 to 172.63.255</i>
IP address range for Management	<i>172.16.64.0 to 172.95.255</i>
IP address range for Router A to Router B serial connection	<i>172.16.96.0 to 172.127.255</i>

Show your work for Practical Subnetting 1 in the space below.

[illegible]

Practical Subnetting 2

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 30% growth in all areas. Circle each subnet on the graphic and answer the questions below.

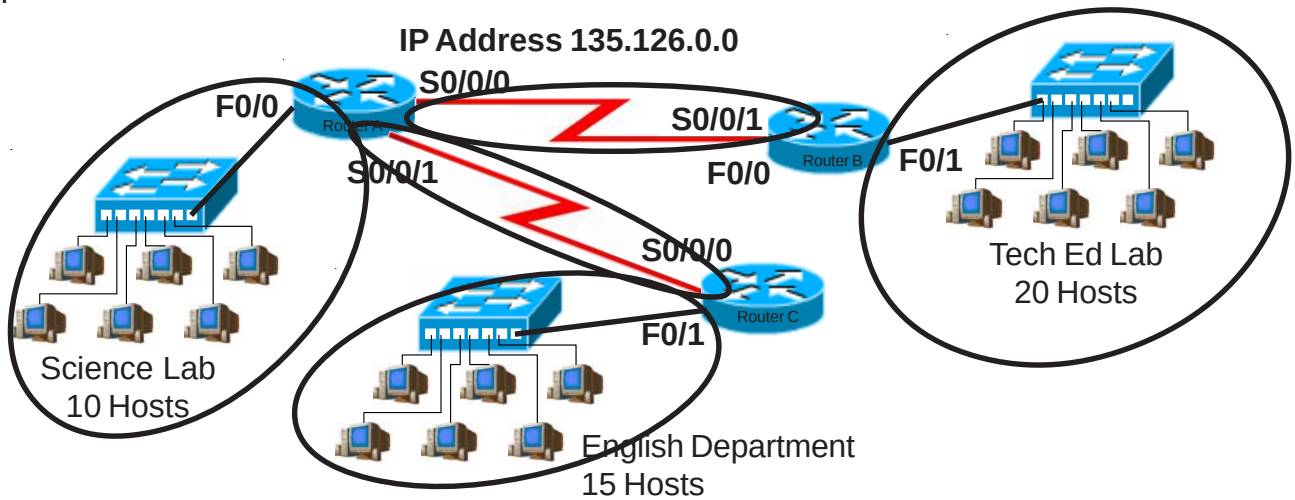

Address class	<u>B</u>
Custom subnet mask	<u>255.255.255.224</u>
Minimum number of subnets needed	<u>5</u>
Extra subnets required for 30% growth (Round up to the next whole number)	<u>+ 2</u>
Total number of subnets needed	<u>= 7</u>
Number of host addresses in the largest subnet group	<u>20</u>
Number of addresses needed for 30% growth in the largest subnet (Round up to the next whole number)	<u>+ 6</u>
Total number of address needed for the largest subnet	<u>= 26</u>

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Tech Ed	<u>135.126.0.0 to 135.126.0.31</u>
IP address range for English	<u>135.126.0.32 to 135.126.0.63</u>
IP address range for Science	<u>135.126.0.64 to 135.126.0.95</u>
IP address range for Router A to Router B serial connection	<u>135.126.0.96 to 135.126.0.127</u>
IP address range for Router A to Router C serial connection	<u>135.126.0.128 to 135.126.0.159</u>

Show your work for Problem 2 in the space below.

Number of Hosts -	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Subnets -	2	4	8	16	32	64	128	256	512	1,024	2,048	4,096	8,192	16,384	32,768	65,536
Binary values -	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
135.126.0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
(0)	0															to
(1)	1															to
(2)		1														to
(3)		1														to
(4)			1													to
(5)			1													to
(6)			1													to
(7)			1													to
(8)			0													to
(9)			0													to
(10)			0													to
(11)			0													to
(12)			1													to
(13)			1													to
(14)			1													to
(15)			1													to


$$\begin{array}{r} 5 \\ \times 3 \\ \hline 15 \end{array}$$

(Round up to 2)

$$\begin{array}{r} 20 \\ \times 3 \\ \hline 60 \end{array}$$

Practical Subnetting 3

Based on the information in the graphic shown, design a classfull network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 25% growth in all areas. Circle each subnet on the graphic and answer the questions below.

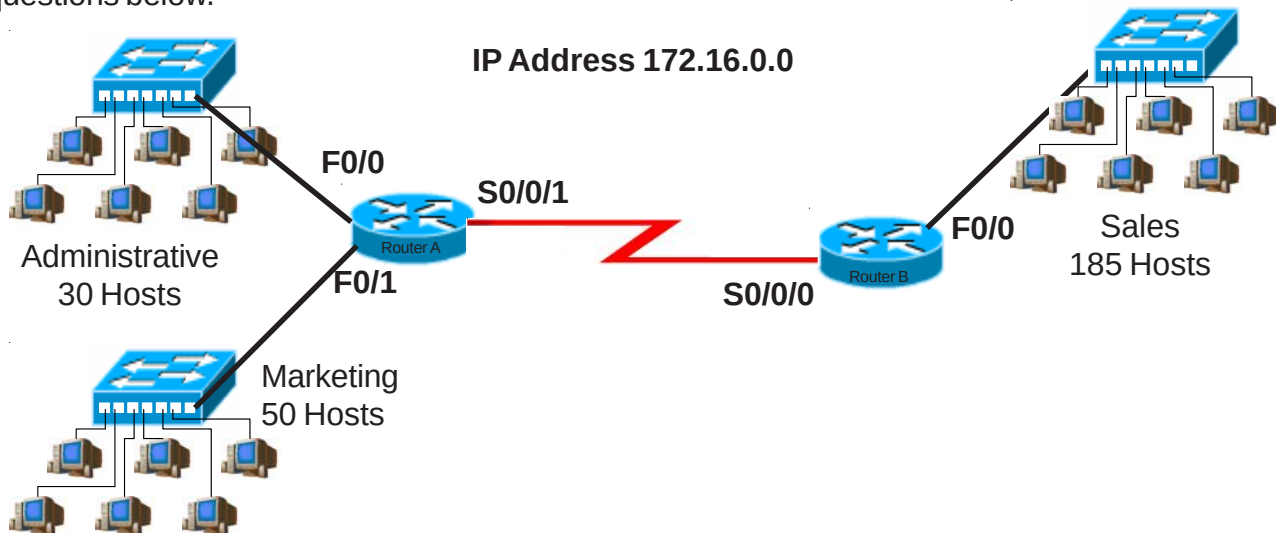

Address class	B
Custom subnet mask	/24
Minimum number of subnets needed	4
Extra subnets required for 25% growth (Round up to the next whole number)	+ 1
Total number of subnets needed	= 5
Number of host addresses in the largest subnet group	185
Number of addresses needed for 25% growth in the largest subnet (Round up to the next whole number)	+ 47
Total number of address needed for the largest subnet	= 232


Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Sales	172.16.10.1 - 172.16.10.254
IP address range for Marketing	172.16.11.1 - 172.16.11.254
IP address range for Administrative	172.16.12.1 - 172.16.12.254
IP address range for Router A to Router B serial connection	172.16.0.1 - 172.16.0.254

Show your work for Problem 3 in the space below.

Practical Subnetting 4

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 70% growth in all areas. Circle each subnet on the graphic and answer the questions below. Circle each subnet on the graphic and answer the questions below.

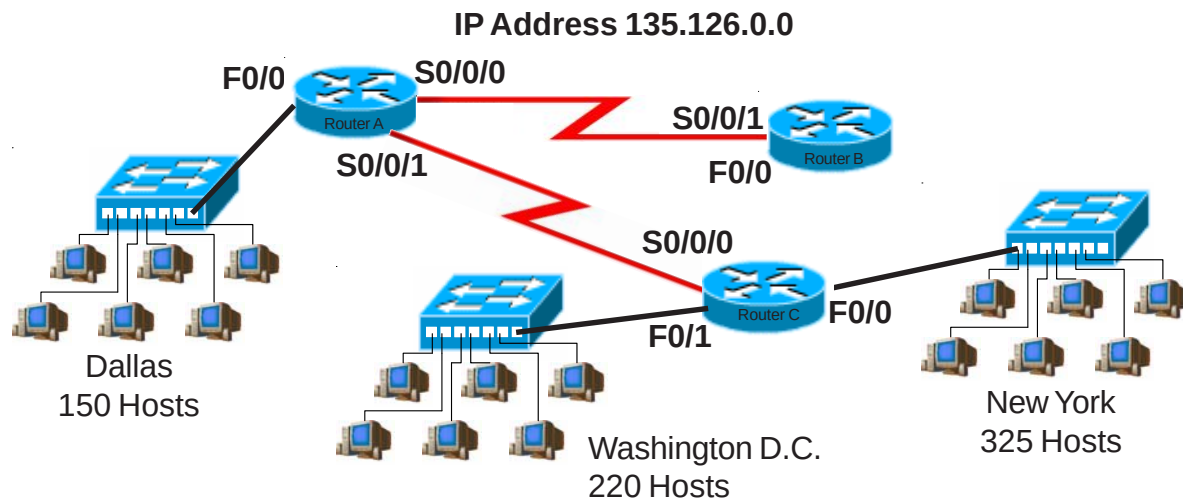

Address class B

Custom subnet mask /22

Minimum number of subnets needed 5

Extra subnets required for 70% growth + 3
(Round up to the next whole number)

Total number of subnets needed = 8

Number of host addresses
in the largest subnet group 325

Number of addresses needed for
70% growth in the largest subnet + 228
(Round up to the next whole number)

Total number of address
needed for the largest subnet = 553

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for New York 135.126.8.1 - 135.126.11.254

IP address range for Washington D. C. 135.126.12.1 - 135.126.15.254

IP address range for Dallas 135.126.16.1 - 135.126.19.254


IP address range for Router A
to Router B serial connection 135.126.0.1 - 135.126.3.254

IP address range for Router A
to Router C serial connection 135.126.4.1 - 135.126.7.254

Show your work for Problem 4 in the space below.

Practical Subnetting 5

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 100% growth in all areas. Circle each subnet on the graphic and answer the questions below.

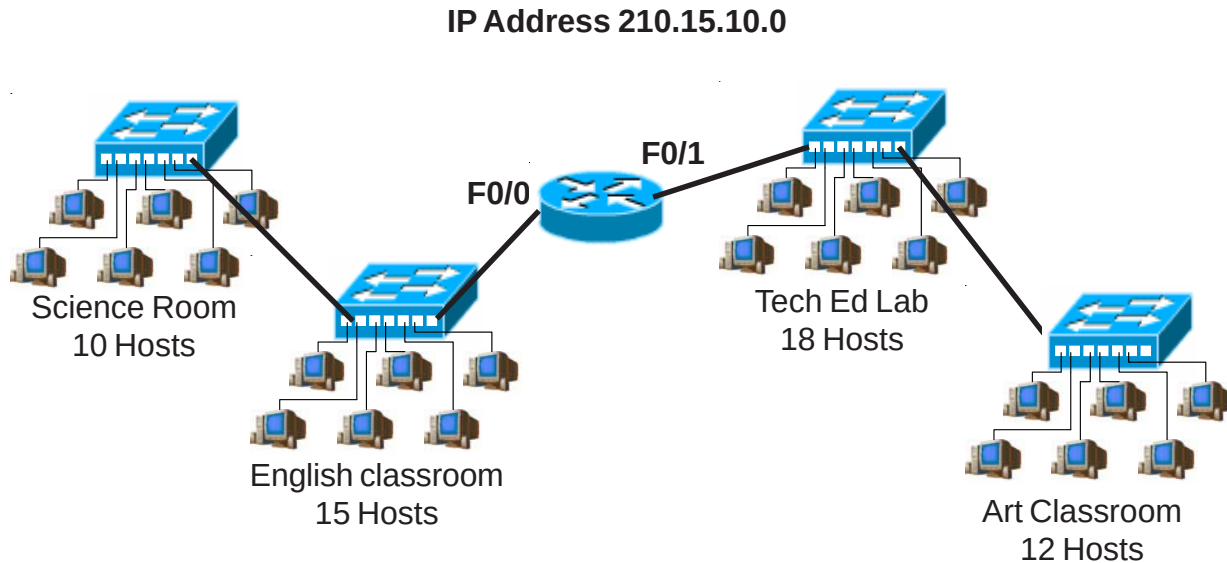

Address class	<u>C</u>
Custom subnet mask	<u>/26</u>
Minimum number of subnets needed	<u>4</u>
Extra subnets required for 100% growth (Round up to the next whole number)	<u>+ 4</u>
Total number of subnets needed	<u>= 8</u>
Number of host addresses in the largest subnet group	<u>18</u>
Number of addresses needed for 100% growth in the largest subnet (Round up to the next whole number)	<u>+ 18</u>
Total number of address needed for the largest subnet	<u>= 36</u>

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.


IP address range for Router F0/0 Port 210.15.10.193 - 210.15.10.254

IP address range for Router F0/1 Port 210.15.10.129 - 210.15.10.190

Show your work for Problem 5 in the space below.

Practical Subnetting 6

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 20% growth in all areas. Circle each subnet on the graphic and answer the questions below. Circle each subnet on the graphic and answer the questions below.

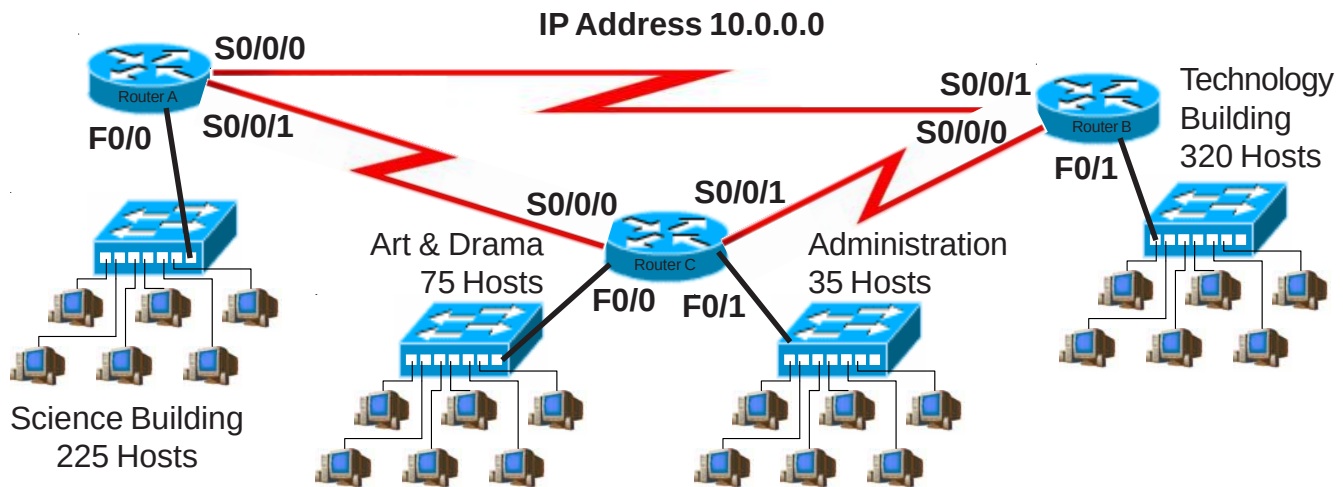

Address class A

Custom subnet mask /23

Minimum number of subnets needed 7

Extra subnets required for 20% growth + 2
(Round up to the next whole number)

Total number of subnets needed = 9

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Technology 10.0.0.1 - 10.0.1.254

IP address range for Science 10.0.2.1 - 10.0.3.254

IP address range for Arts & Drama 10.0.4.1 - 10.0.5.254

IP Address range Administration 10.0.6.1 - 10.0.7.254

IP address range for Router A
to Router B serial connection 10.255.254.1 - 10.255.255.254


IP address range for Router A
to Router C serial connection 10.255.252.1 - 10.255.253.254

IP address range for Router B
to Router C serial connection 10.255.250.1 - 10.255.251.254

Show your work for Problem 6 in the space below.

Practical Subnetting 7

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 125% growth in all areas. Circle each subnet on the graphic and answer the questions below.

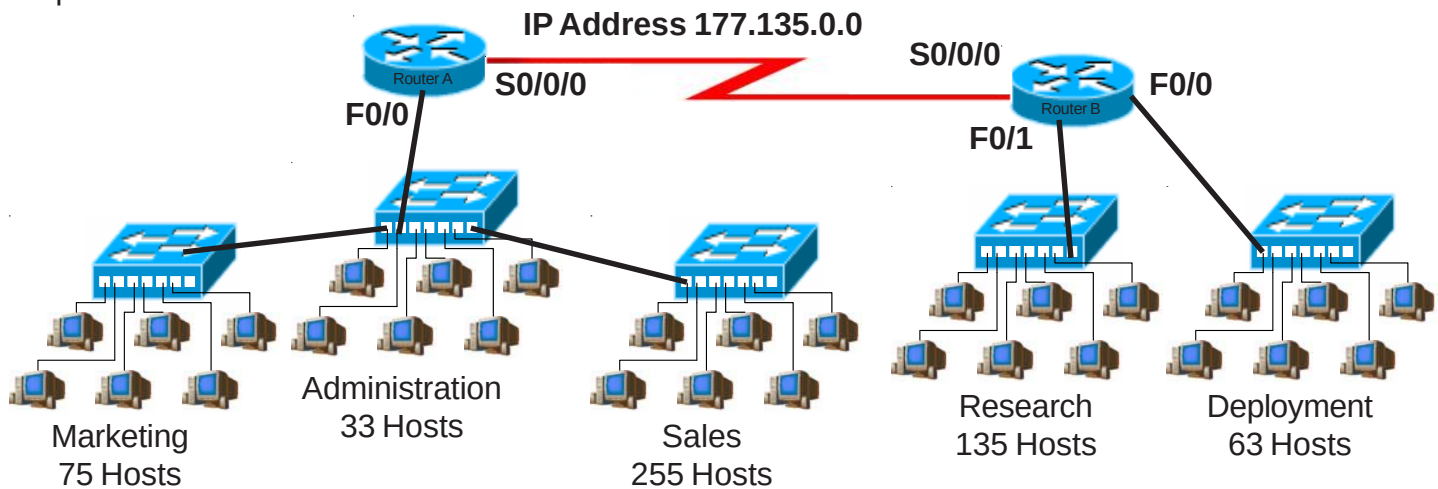

Address class	B
Custom subnet mask	/22
Minimum number of subnets needed	6
Extra subnets required for 125% growth (Round up to the next whole number)	+ 8
Total number of subnets needed	= 14
Number of host addresses in the largest subnet group	255
Number of addresses needed for 125% growth in the largest subnet (Round up to the next whole number)	+ 319
Total number of address needed for the largest subnet	= 574


Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Router A Port F0/0	177.135.0.1 - 177.135.3.254
IP address range for Research	177.135.4.1 - 177.135.7.254
IP address range for Deployment	177.135.8.1 - 177.135.11.254
IP address range for Router A to Router B serial connection	177.135.252.1 - 177.135.255.254

Show your work for Problem 7 in the space below.

Practical Subnetting 8

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number subnets**, and allow enough extra subnets and hosts for 85% growth in all areas. Circle each subnet on the graphic and answer the questions below.

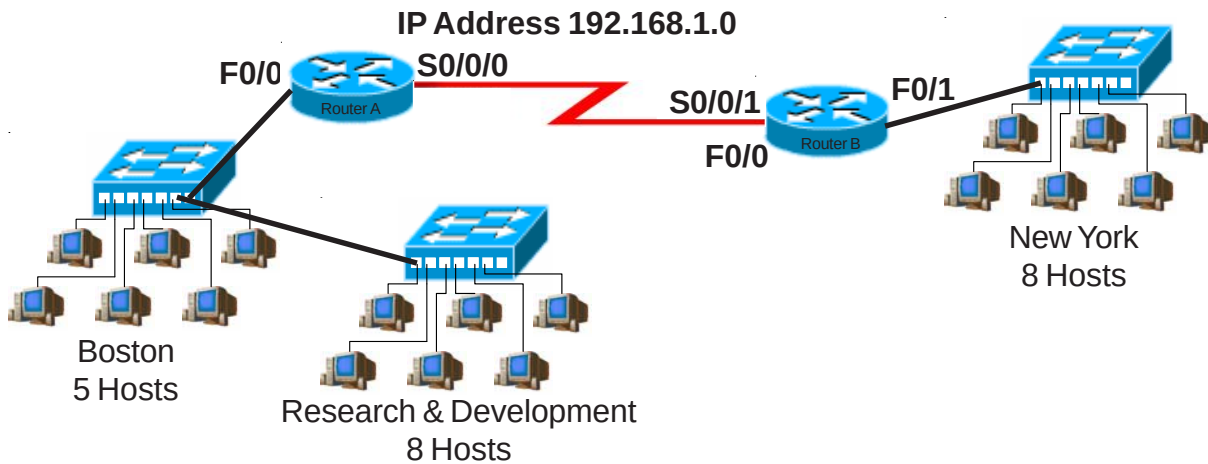

Address class C

Custom subnet mask /27

Minimum number of subnets needed 4

Extra subnets required for 85% growth + 4
(Round up to the next whole number)

Total number of subnets needed = 8

Number of host addresses
in the largest subnet group 8

Number of addresses needed for
85% growth in the largest subnet + 7
(Round up to the next whole number)

Total number of address
needed for the largest subnet = 15

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Router A F0/0 192.168.1.1 - 192.168.1.30


IP address range for New York 192.168.1.33 - 192.168.1.62

IP address range for Router A
to Router B serial connection 192.168.1.225 - 192.168.1.254

Show your work for Problem 8 in the space below.

Practical Subnetting 9

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 15% growth in all areas. Circle each subnet on the graphic and answer the questions below.

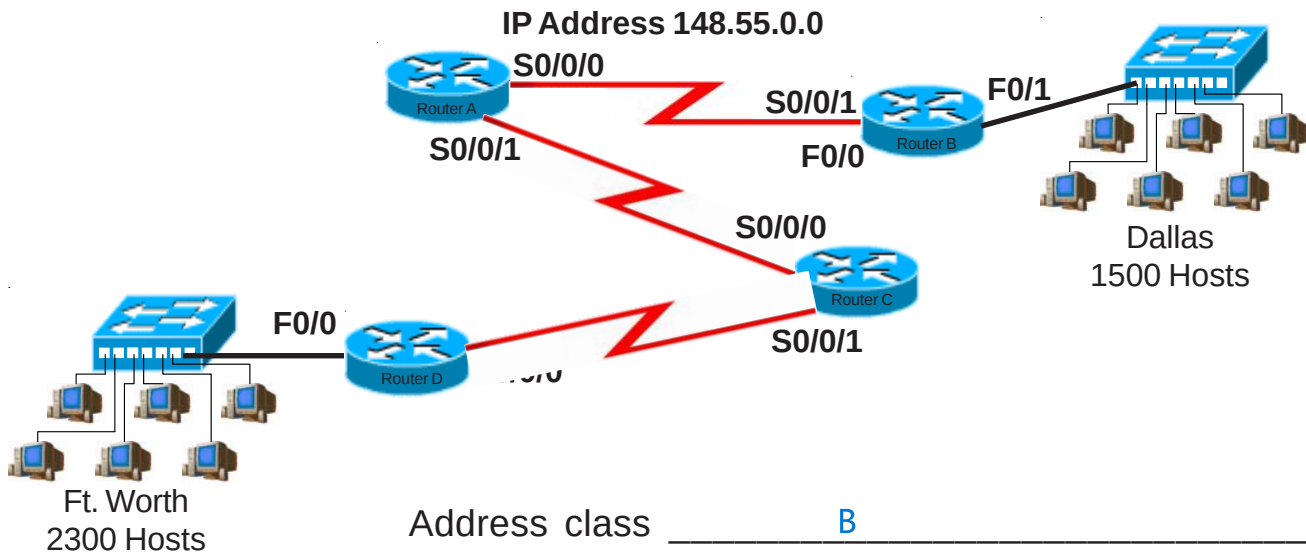

Address class	B
Custom subnet mask	/20
Minimum number of subnets needed	5
Extra subnets required for 15% growth (Round up to the next whole number)	+ 1
Total number of subnets needed	= 6
Number of host addresses in the largest subnet group	2300
Number of addresses needed for 15% growth in the largest subnet (Round up to the next whole number)	+ 345
Total number of address needed for the largest subnet	= 2645


Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Ft. Worth	148.55.0.1 - 148.55.15.254
IP address range for Dallas	148.55.16.1 - 148.55.31.254
IP address range for Router A to Router B serial connection	148.55.240.1 - 148.55.255.254
IP address range for Router A to Router C serial connection	148.55.224.1 - 148.55.239.254
IP address range for Router C to Router D serial connection	148.55.208.1 - 148.55.223.254

Show your work for Problem 9 in the space below.

Practical Subnetting 10

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 110% growth in all areas. Circle each subnet on the graphic and answer the questions below.

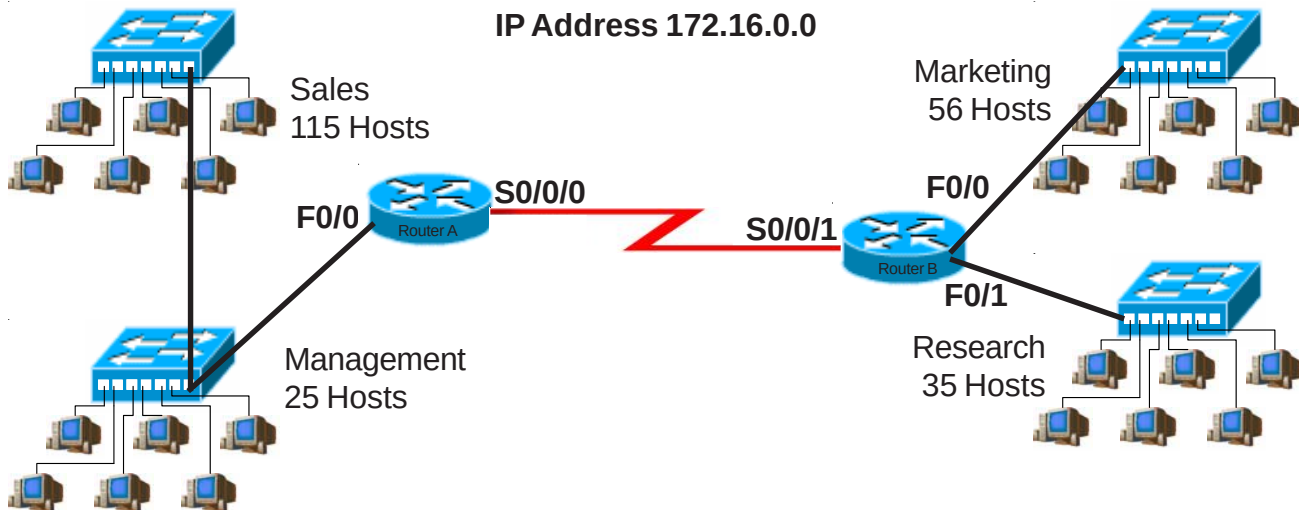

Address class	B
Custom subnet mask	/24
Minimum number of subnets needed	5
Extra subnets required for 110% growth (Round up to the next whole number)	+ 6
Total number of subnets needed	= 11
Number of host addresses in the largest subnet group	115
Number of addresses needed for 110% growth in the largest subnet (Round up to the next whole number)	+ 127
Total number of address needed for the largest subnet	= 242

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Sales/Managemnt	172.16.0.1 - 172.16.0.254
IP address range for Marketing	172.16.1.1 - 172.16.1.254
IP address range for Research	172.16.2.1 - 172.16.2.254
IP address range for Router A to Router B serial connection	172.16.255.1 - 172.16.255.254

Show your work for Problem 10 in the space below.

Valid and Non-Valid IP Addresses

Using the material in this workbook identify which of the addresses below are correct and usable. If they are not usable addresses explain why.

IP Address: 0.230.190.192

Subnet Mask: 255.0.0.0

Reference Page Inside Front Cover

The network ID cannot be 0.

IP Address: 192.10.10.1

Subnet Mask: 255.255.255.0

Reference Pages 28-29

OK

IP Address: 245.150.190.10

Subnet Mask: 255.255.255.0

Reference Page Inside Front Cover

Classe E

IP Address: 135.70.191.255

Subnet Mask: 255.255.254.0

Reference Pages 48-49

BROADCAST

IP Address: 127.100.100.10

Subnet Mask: 255.0.0.0

Reference Pages Inside Front Cover

LOCALHOST

IP Address: 93.0.128.1

Subnet Mask: 255.255.224.0

Reference Pages 56-57

OK

IP Address: 200.10.10.128

Subnet Mask: 255.255.255.224

Reference Pages 54-55

ADRESSE RESEAU

IP Address: 165.100.255.189

Subnet Mask: 255.255.255.192

Reference Pages 30-31

OK

IP Address: 190.35.0.10

Subnet Mask: 255.255.255.192

Reference Pages 34-35

OK

IP Address: 218.35.50.195

Subnet Mask: 255.255.0.0

Reference Page Inside Front Cover

IP CLASSE C / MASQUE CLASSE B

IMPOSSIBLE

IP Address: 200.10.10.175 /22

Reference Pages 54-55 and/or Inside Front Cover

IP CLASSE C / MASQUE CLASSE B

IMPOSSIBLE

IP Address: 135.70.255.255

Subnet Mask: 255.255.224.0

Reference Pages 48-49

BROADCAST

IP Address Breakdown


/24	/25	/26	/27	/28	/29	/30		
8+8+8	8+8+8+1	8+8+8+2	8+8+8+3	8+8+8+4	8+8+8+5	8+8+8+6		
255.255.255.0	255.255.255.128	255.255.255.192	255.255.255.224	255.255.255.240	255.255.255.248	255.255.255.252		
256 Hosts	128 Hosts	64 Hosts	32 Hosts	16 Hosts	8 Hosts	4 Hosts		
0-255	0-127	0-63		0-15	0-7	0-3		
					8-15	4-7		
				16-31	16-23	8-11		
					24-31	12-15		
			32-47	32-39	16-19			
					20-23			
				40-47	24-27			
					48-63	48-55	28-31	
		56-63	32-35					
			64-127			64-79	36-39	
		40-43						
		80-95			44-47			
					96-111	48-51		
		104-111		52-55				
				112-127		56-59		
		120-127				60-63		
					128-255	128-191		128-143
		72-79	68-71					
		144-159	72-75					
			152-159	76-79				
	160-175	80-87		80-83				
		176-191	84-87					
			184-191	88-91				
		192-207		88-95			92-95	
	208-223		96-103	96-99				
			216-223	100-103			100-103	
	224-239			104-111			104-107	
		240-247	108-111	108-111				
			248-255	112-119		112-115		
		192-255				128-143	116-119	116-119
	120-127		120-123					
	144-159		124-127			124-127		
			160-175			128-135	128-131	
	176-191			136-143		132-135		
			192-207	144-151		136-139		
	208-223			152-159		140-143		
			224-239	16-167		144-147		
	240-247			168-175		148-151		
			248-255	176-183		152-155		
	252-255			184-191		156-159		

Visualizing Subnets Using The Box Method

The box method is the simplest way to visualize the breakdown of subnets and addresses into smaller sizes.


Start with a square. The whole square is a single subnet comprised of 256 addresses.

/24
255.255.255.0
256 Hosts
1 Subnet

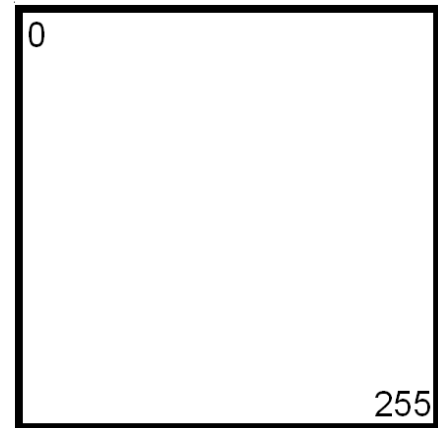


Split the box in half and you get two subnets with 128 addresses,

/25
255.255.255.128
128 Hosts
2 Subnets

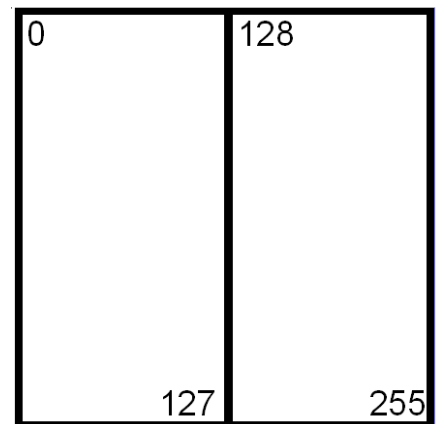

Divide the box into quarters and you get four subnets with 64 addresses,

/26
255.255.255.192
64 Hosts
4 Subnets

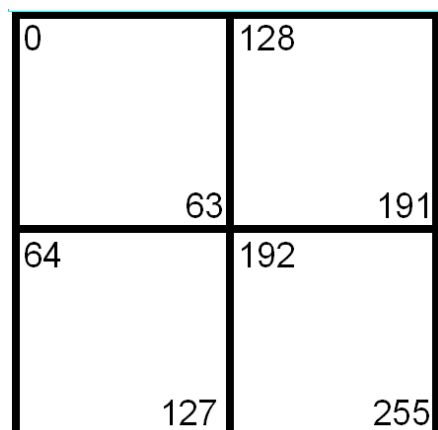

Split each individual square and you get eight subnets with 32 addresses,

/27
255.255.255.224
32 Hosts
8 Subnets

0	32	128	160
	31	63	159
64	96	192	224
	95	127	255

Split the boxes in half again and you get sixteen subnets with sixteen addresses,

/28
255.255.255.240
16 Hosts
16 Subnets

0	32	128	160
	15	47	143
16	48	144	176
	31	63	159
64	96	192	224
	79	111	207
80	112	208	240
	95	127	255

The next split gives you thirty two subnets with eight addresses,

/29
255.255.255.248
8 Hosts
32 Subnets

0	8	32	40	128	136	160	168
	7	15	39	47	135	143	175
16	24	48	56	144	152	176	184
	23	31	55	63	151	159	183
64	72	96	104	192	200	224	232
	71	79	103	111	199	207	239
80	88	112	120	208	216	240	248
	87	95	119	127	215	223	255

The last split gives sixty four subnets with four addresses each,

/30
255.255.255.252
4 Hosts
64 Subnets

0	8	32	40	128	136	160	168
	3	11	35	43	131	139	171
4	12	36	44	132	140	164	172
	7	15	39	47	135	143	175
16	24	48	56	144	152	176	184
	19	27	51	59	147	155	179
20	28	52	60	148	156	180	188
	23	31	55	63	151	159	183
64	72	96	104	192	200	224	232
	67	75	99	107	195	203	235
68	76	100	108	196	204	228	236
	71	79	103	111	199	207	239
80	88	112	120	208	216	240	248
	83	91	115	123	211	219	243
84	92	116	124	212	220	244	252
	87	95	119	127	215	223	255

Class A Addressing Guide

CIDR	# of Bits Borrowed	Subnet Mask	Total # of Subnets	Total # of Hosts	Usable # of Hosts
/8	0	255.0.0.0	1	16,777,216	16,777,214
/9	1	255.128.0.0	2	8,388,608	8,388,606
/10	2	255.192.0.0	4	4,194,304	4,194,302
/11	3	255.224.0.0	8	2,097,152	2,097,150
/12	4	255.240.0.0	16	1,048,576	1,048,574
/13	5	255.248.0.0	32	524,288	524,286
/14	6	255.252.0.0	64	262,144	262,142
/15	7	255.254.0.0	128	131,072	131,070
/16	8	255.255.0.0	256	65,536	65,534
/17	9	255.255.128.0	512	32,768	32,766
/18	10	255.255.192.0	1,024	16,384	16,382
/19	11	255.255.224.0	2,048	8,192	8,190
/20	12	255.255.240.0	4,096	4,096	4,094
/21	13	255.255.248.0	8,192	2,048	2,046
/22	14	255.255.252.0	16,384	1,024	1,022
/23	15	255.255.254.0	32,768	512	510
/24	16	255.255.255.0	65,536	256	254
/25	17	255.255.255.128	131,072	128	126
/26	18	255.255.255.192	262,144	64	62
/27	19	255.255.255.224	524,288	32	30
/28	20	255.255.255.240	1,048,576	16	14
/29	21	255.255.255.248	2,097,152	8	6
/30	22	255.255.255.252	4,194,304	4	2

Class B Addressing Guide

CIDR	# of Bits Borrowed	Subnet Mask	Total # of Subnets	Total # of Hosts	Usable # of Hosts
/16	0	255.255.0.0	1	65,536	65,534
/17	1	255.255.128.0	2	32,768	32,766
/18	2	255.255.192.0	4	16,384	16,382
/19	3	255.255.224.0	8	8,192	8,190
/20	4	255.255.240.0	16	4,096	4,094
/21	5	255.255.248.0	32	2,048	2,046
/22	6	255.255.252.0	64	1,024	1,022
/23	7	255.255.254.0	128	512	510
/24	8	255.255.255.0	256	256	254
/25	9	255.255.255.128	512	128	126
/26	10	255.255.255.192	1,024	64	62
/27	11	255.255.255.224	2,048	32	30
/28	12	255.255.255.240	4,096	16	14
/29	13	255.255.255.248	8,192	8	6
/30	14	255.255.255.252	16,384	4	2

Class C Addressing Guide

CIDR	# of Bits Borrowed	Subnet Mask	Total # of Subnets	Total # of Hosts	Usable # of Hosts
/24	0	255.255.255.0	1	256	254
/25	1	255.255.255.128	2	128	126
/26	2	255.255.255.192	4	64	62
/27	3	255.255.255.224	8	32	30
/28	4	255.255.255.240	16	16	14
/29	5	255.255.255.248	32	8	6
/30	6	255.255.255.252	64	4	2

