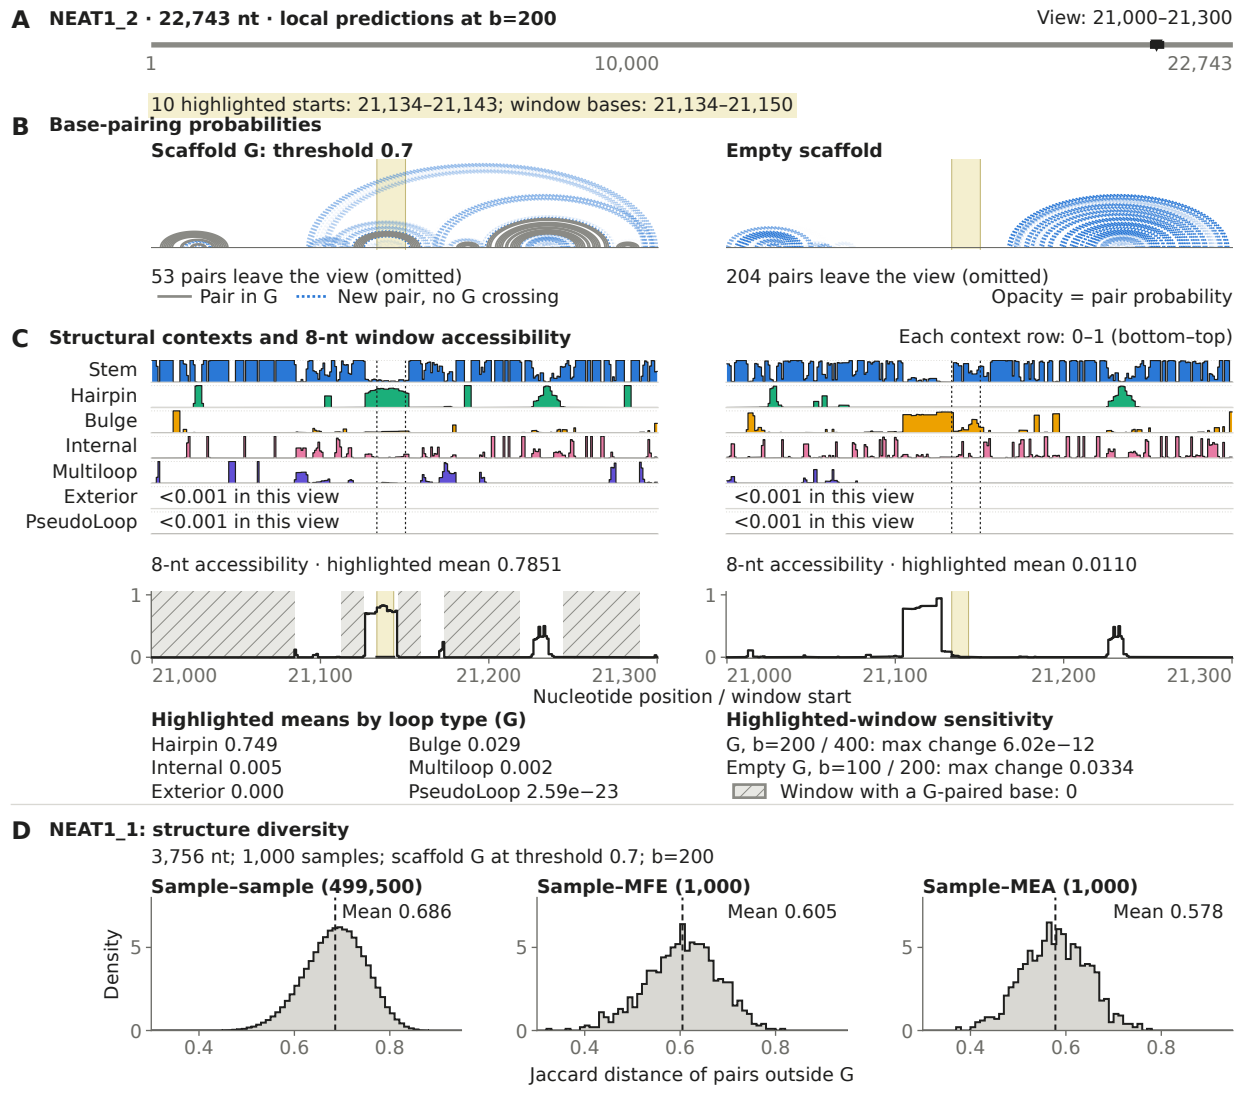

A
NEAT1_2 · 22,743 nt · local predictions at b=200
View: 21,000–21,300
1
10,000
22,743
10 highlighted starts: 21,134–21,143; window bases: 21,134–21,150
B
Base-pairing probabilities
Scaffold G: threshold 0.7
Empty scaffold
53 pairs leave the view (omitted)
Pair in G
New pair, no G crossing
204 pairs leave the view (omitted)
Opacity = pair probability
C
Structural contexts and 8-nt window accessibility
Each context row: 0–1 (bottom–top)
Stem
Hairpin
Bulge
Internal
Multiloop
Exterior
PseudoLoop
<0.001 in this view
<0.001 in this view
<0.001 in this view
<0.001 in this view
8-nt accessibility · highlighted mean 0.7851
8-nt accessibility · highlighted mean 0.0110
1
0
21,000
21,100
21,200
21,300
Nucleotide position / window start
Highlighted means by loop type (G)
Hairpin 0.749
Bulge 0.029
Internal 0.005
Multiloop 0.002
Exterior 0.000
PseudoLoop 2.59e−23
Highlighted-window sensitivity
G, b=200 / 400: max change 6.02e−12
Empty G, b=100 / 200: max change 0.0334
Window with a G-paired base: 0
D
NEAT1_1: structure diversity
3,756 nt; 1,000 samples; scaffold G at threshold 0.7; b=200
Sample–sample (499,500)
Mean 0.686
Sample–MFE (1,000)
Mean 0.605
Sample–MEA (1,000)
Mean 0.578
Density
5
0
0.4
0.6
0.8
Jaccard distance of pairs outside G