




# **Object Oriented Programming in Python: Defining Classes**

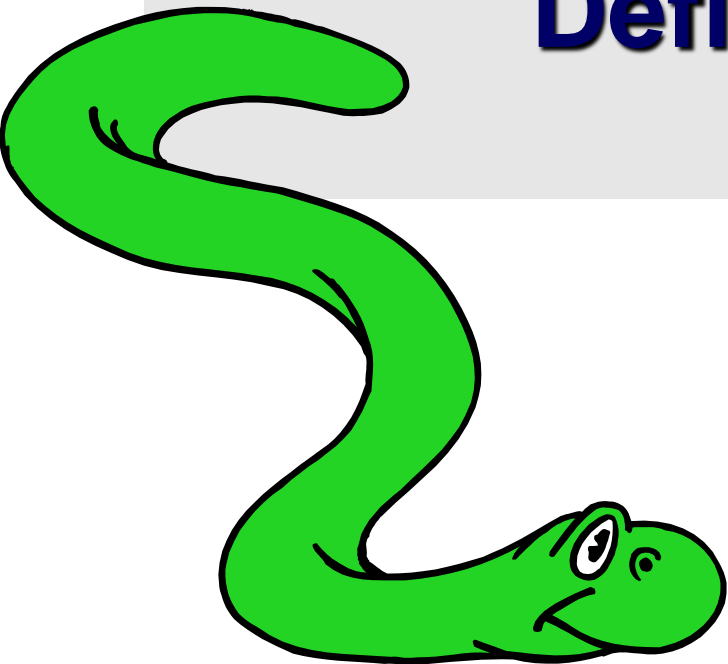


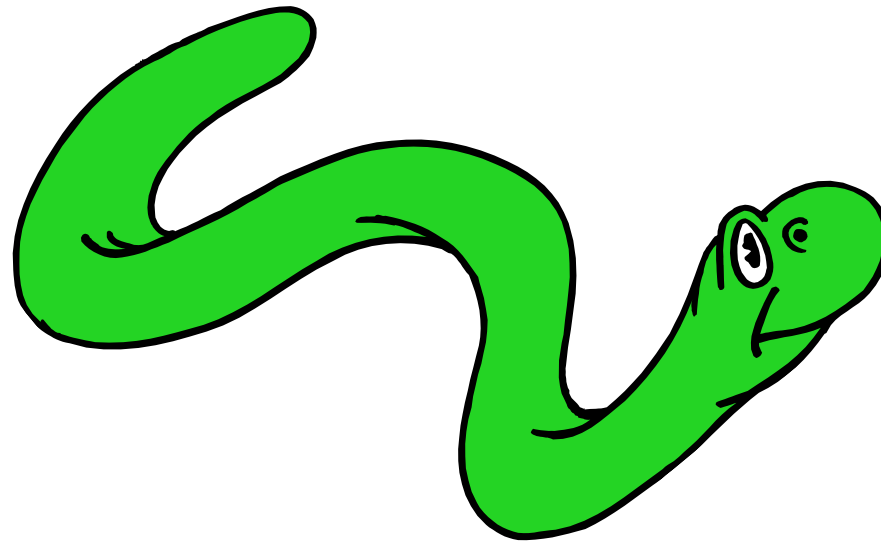



# Encapsulation

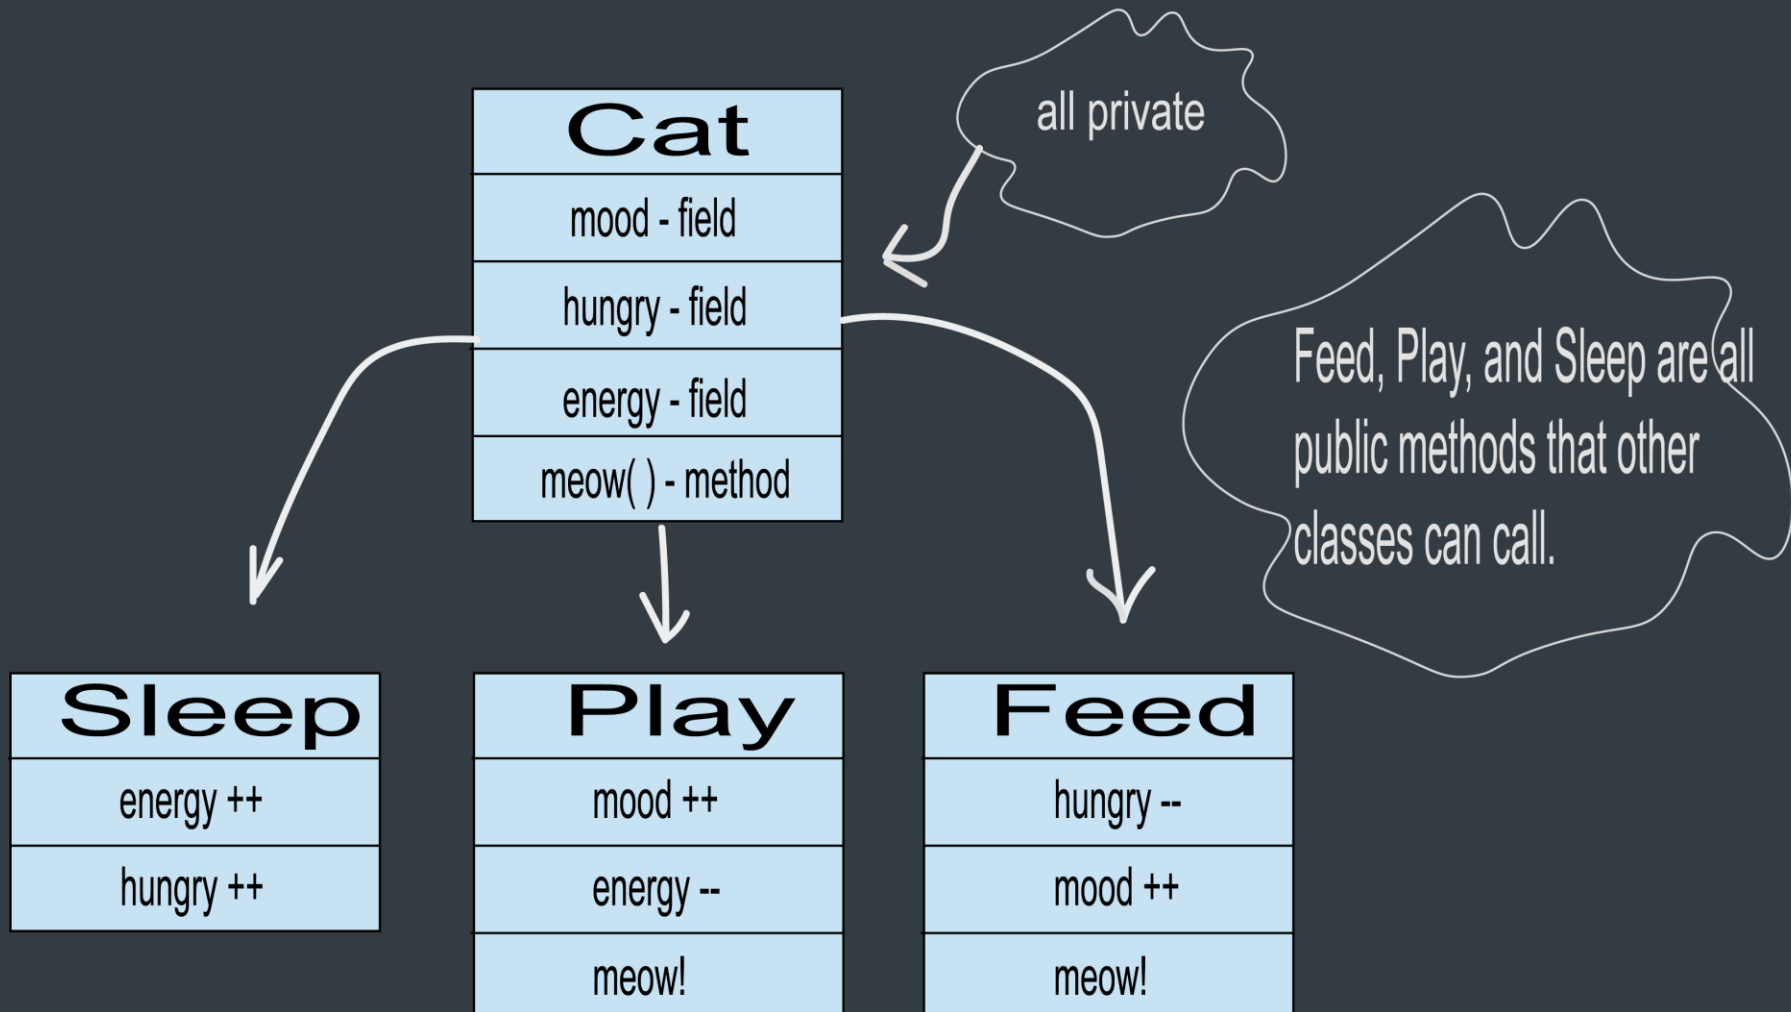

# Inheritance

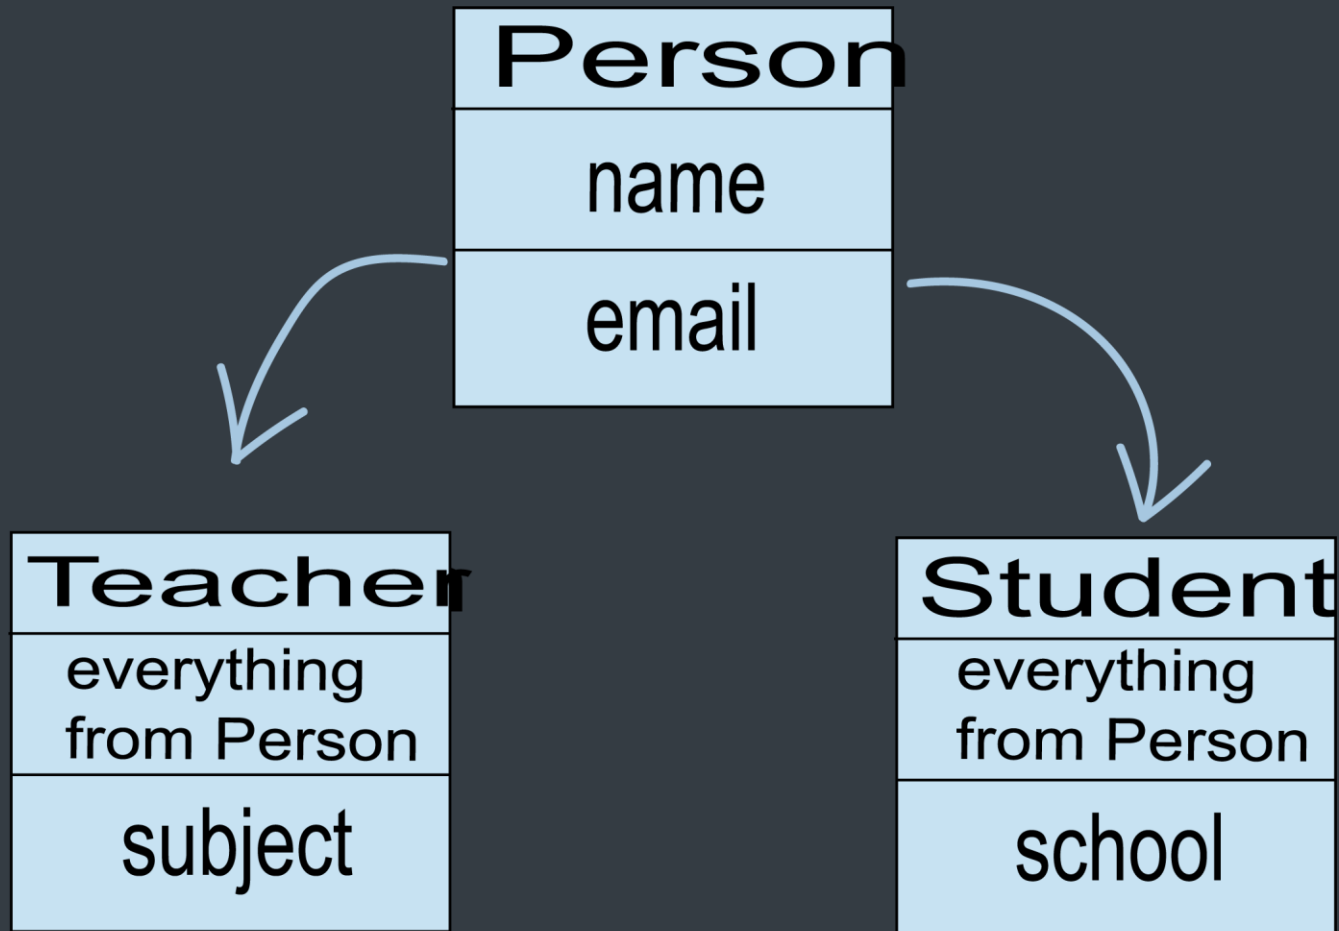

# Abstraction

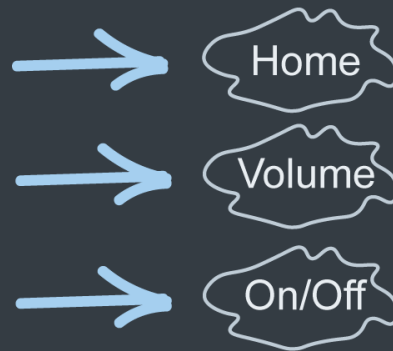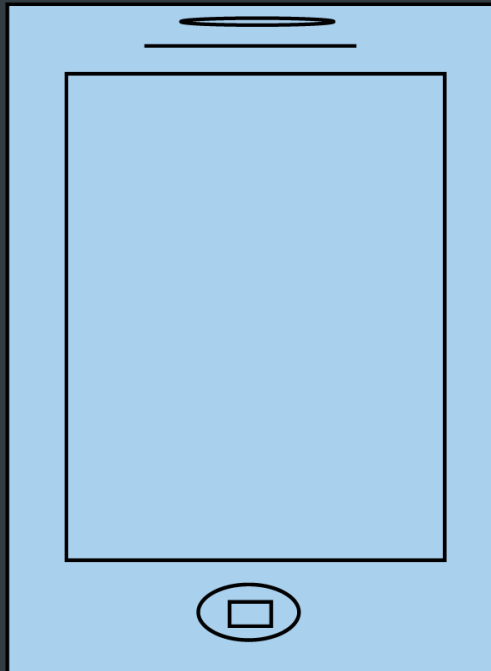

You only interact with a few buttons and know what they do but not how they work. Implementation details are hidden. If the implementation changes (i.e. Software Update) it rarely affects the abstraction you use.

# Polymorphism

Figure Interface:

Whoever uses it must implement:

- calculateSurface( )
- calculate Perimeter( )



# Defining a Class

- A *class* is a special data type which defines how to build a certain kind of object.
- The *class* also stores some data items that are shared by all the instances of this class
- *Instances* are objects that are created which follow the definition given inside of the class
- Python doesn't use separate class interface definitions as in some languages
- You just define the class and then use it

# Methods in Classes

- Define a *method* in a *class* by including function definitions within the scope of the class block
- There must be a special first argument *self* in all of method definitions which gets bound to the calling instance
- There is usually a special method called *\_\_init\_\_* in most classes
- We'll talk about both later...



# A simple class def: *student*

```
class student:
    """A class representing a
    student """
    def __init__(self, n, a):
        self.full_name = n
        self.age = a
    def get_age(self):
        return self.age
```

# **Creating and Deleting Instances**

# Instantiating Objects

- Just use the class name with ( ) notation and assign the result to a variable
- `__init__` serves as a constructor for the class. Usually does some initialization work
- The arguments passed to the class name are given to its `__init__()` method
- So, the `__init__` method for `student` is passed “Bob” and 21 and the new class instance is bound to `b`:

```
b = student("Bob", 21)
```

# Constructor: `__init__`

- An `__init__` method can take any number of arguments.
- Like other functions or methods, the arguments can be defined with default values, making them optional to the caller.
- However, the first argument `self` in the definition of `__init__` is special...

# Self

- The first argument of every method is a reference to the current instance of the class
- By convention, we name this argument *self*
- In `__init__`, *self* refers to the object currently being created; so, in other class methods, it refers to the instance whose method was called
- Similar to the keyword *this* in Java or C++
- But Python uses *self* more often than Java uses *this*

# Self

- Although you must specify `self` explicitly when defining the method, you don't include it when calling the method.
- Python passes it for you automatically

Defining a method:

*(this code inside a class definition.)*

```
def set_age(self, num):  
    self.age = num
```


Calling a method:

```
>>> x.set_age(23)
```

# Deleting instances: No Need to “free”

- When you are done with an object, you don't have to delete or free it explicitly.
- Python has automatic garbage collection.
- Python will automatically detect when all of the references to a piece of memory have gone out of scope. Automatically frees that memory.
- Generally works well, few memory leaks
- There's also no “destructor” method for classes

# **Access to Attributes and Methods**

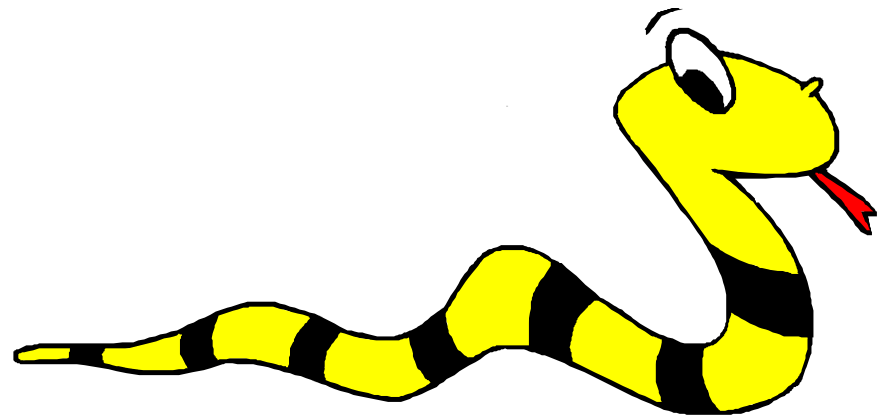



# Definition of student

```
class student:
    """A class representing a student
    """
    def __init__(self,n,a):
        self.full_name = n
        self.age = a
    def get_age(self):
        return self.age
```

# Traditional Syntax for Access

```
>>> f = student("Bob Smith", 23)
```

```
>>> f.full_name # Access attribute  
"Bob Smith"
```

```
>>> f.get_age() # Access a method  
23
```

# Accessing unknown members

- Problem: Occasionally the name of an attribute or method of a class is only given at run time...

- Solution:

```
getattr(object_instance, string)
```

- **string** is a string which contains the name of an attribute or method of a class
- **getattr(object\_instance, string)** returns a reference to that attribute or method

# getattr(object\_instance, string)

```
>>> f = student("Bob Smith", 23)
>>> getattr(f, "full_name")
"Bob Smith"
>>> getattr(f, "get_age")
<method get_age of class
studentClass at 010B3C2>
>>> getattr(f, "get_age")() # call it
23
>>> getattr(f, "get_birthday")
# Raises AttributeError - No method!
```

# hasattr(object\_instance,string)

```
>>> f = student("Bob Smith", 23)
```

```
>>> hasattr(f, "full_name")
```

```
True
```


```
>>> hasattr(f, "get_age")
```

```
True
```

```
>>> hasattr(f, "get_birthday")
```

```
False
```

# Attributes

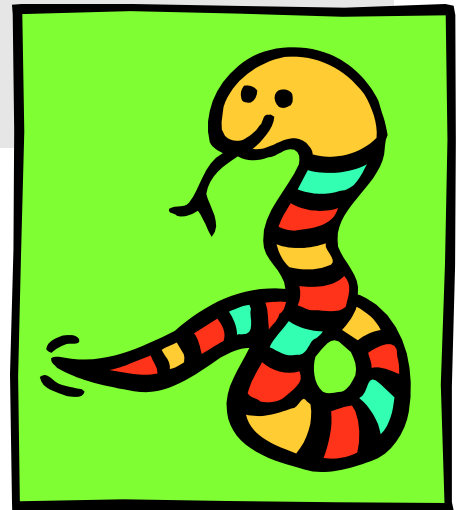

# Two Kinds of Attributes

- The non-method data stored by objects are called attributes
- *Data* attributes
  - Variable owned by a *particular instance* of a class
  - Each instance has its own value for it
  - These are the most common kind of attribute
- *Class* attributes
  - Owned by the *class as a whole*
  - *All class instances share the same value for it*
  - Called “static” variables in some languages
  - Good for (1) class-wide constants and (2) building counter of how many instances of the class have been made

# Data Attributes

- Data attributes are created and initialized by an `__init__()` method.
  - Simply assigning to a name creates the attribute
  - Inside the class, refer to data attributes using **self** —for example, **self.full\_name**

```
class teacher:
    "A class representing teachers."
    def __init__(self,n):
        self.full_name = n
    def print_name(self):
        print self.full_name
```



# Class Attributes

- Because all instances of a class share one copy of a class attribute, when *any* instance changes it, the value is changed for *all* instances
- Class attributes are defined *within* a class definition and *outside* of any method
- Since there is one of these attributes *per class* and not one *per instance*, they're accessed via a different notation:
  - Access class attributes using `self.__class__.name` notation  
-- This is just one way to do this & the safest in general.

```
class sample:
    x = 23
    def increment(self):
        self.__class__.x += 1
```


```
>>> a = sample()
>>> a.increment()
>>> a.__class__.x
24
```

# Data vs. Class Attributes

```
class counter:
    overall_total = 0
    # class attribute
    def __init__(self):
        self.my_total = 0
        # data attribute
    def increment(self):
        counter.overall_total = \
        counter.overall_total + 1
        self.my_total = \
        self.my_total + 1
```

```
>>> a = counter()
>>> b = counter()
>>> a.increment()
>>> b.increment()
>>> b.increment()
>>> a.my_total
1
>>> a.__class__.overall_total
3
>>> b.my_total
2
>>> b.__class__.overall_total
3
```

# Inheritance

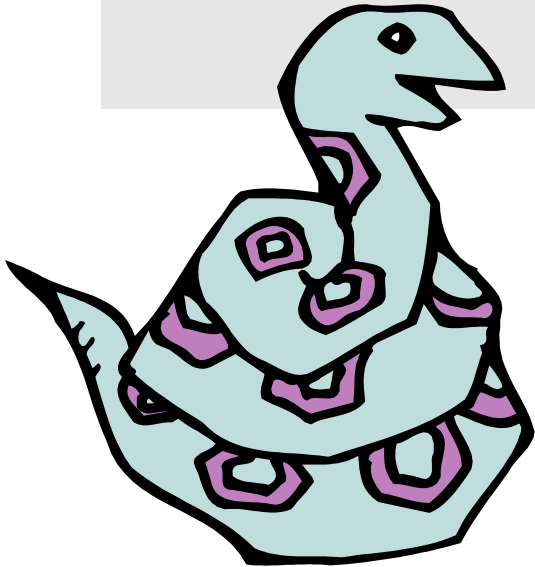

# Subclasses

- A class can *extend* the definition of another class
  - Allows use (or extension ) of methods and attributes already defined in the previous one.
  - New class: *subclass*. Original: *parent*, *ancestor* or *superclass*
- To define a subclass, put the name of the superclass in parentheses after the subclass's name on the first line of the definition.

```
Class Cs_student (student) :
```

  - Python has no 'extends' keyword like Java.
  - Multiple inheritance is supported.

# Redefining Methods

- To *redefine a method* of the parent class, include a new definition using the same name in the subclass.
  - The old code won't get executed.
- To execute the method in the parent class *in addition to* new code for some method, explicitly call the parent's version of the method.

```
parentClass.methodName(self, a, b, c)
```

- **The only time you ever explicitly pass 'self' as an argument is when calling a method of an ancestor.**

# Definition of a class extending student

```
Class Student:  
    "A class representing a student."
```

```
def __init__(self,n,a):  
    self.full_name = n  
    self.age = a
```

```
def get_age(self):  
    return self.age
```

---

```
Class Cs_student (Student):  
    "A class extending student."
```

```
def __init__(self,n,a,s):  
    Student.__init__(self,n,a) #Call __init__ for Student  
    self.section_num = s
```

```
def get_age(): #Redefines get_age method entirely  
    print "Age: " + str(self.age)
```


# Extending `__init__`

- Same as for redefining any other method...
  - Commonly, the ancestor's `__init__` method is executed in addition to new commands.
  - You'll often see something like this in the `__init__` method of subclasses:

```
parentClass.__init__(self, x, y)
```

where `parentClass` is the name of the parent's class.

# **Special Built-In Methods and Attributes**

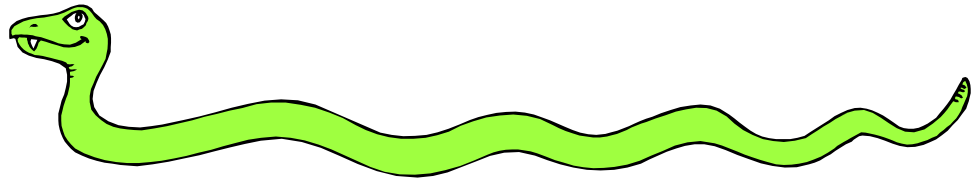



# Built-In Members of Classes

- Classes contain many methods and attributes that are included by Python even if you don't define them explicitly.
  - Most of these methods define automatic functionality triggered by special operators or usage of that class.
  - The built-in attributes define information that must be stored for all classes.
- All built-in members have double underscores around their names: `__init__` `__doc__`

# Special Methods

- For example, the method `__repr__` exists for all classes, and you can always redefine it
- The definition of this method specifies how to turn an instance of the class into a string
  - `print f` sometimes calls `f.__repr__()` to produce a string for object `f`
- If you type `f` at the prompt and hit ENTER, then you are also calling `__repr__` to determine what to display to the user as output

# Special Methods – Example

```
class student:  
    ...  
    def __repr__(self):  
        return "I'm named " + self.full_name  
    ...
```

```
>>> f = student("Bob Smith", 23)
```

```
>>> print (f)
```

```
I'm named Bob Smith
```

```
>>> f
```

```
"I'm named Bob Smith"
```

# Special Methods

- You can redefine these as well:

`__init__` : The constructor for the class

`__cmp__` : Define how `==` works for class

`__len__` : Define how `len ( obj )` works

`__copy__` : Define how to copy a class

- Other built-in methods allow you to give a class the ability to use `[ ]` notation like an array or `( )` notation like a function call

# Special Data Items

- These attributes exist for all classes.

`__doc__` : Variable for documentation string for class

`__class__` : Variable which gives you a reference to the class from any instance of it

`__module__` : Variable which gives a reference to the module in which the particular class is defined

`__dict__` : The dictionary that is actually the namespace for a class (but not its superclasses)

- Useful:

- **`dir(x)` returns a list of all methods and attributes defined for object x**

# Special Data Items – Example

```
>>> f = student("Bob Smith", 23)
```

```
>>> print f.__doc__
```


A class representing a student.

```
>>> f.__class__
```

```
< class studentClass at 010B4C6 >
```

```
>>> g = f.__class__("Tom Jones",  
34)
```

# Private Data and Methods

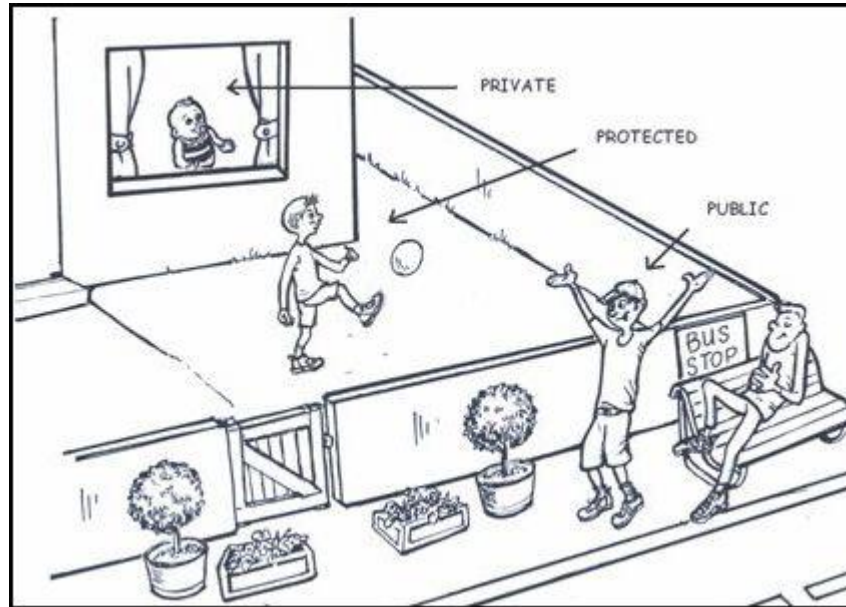

Name	Notation	Behavior
name	Public	Can be accessed from inside and outside
_name	Protected	Like a public member, but they shouldn't be directly accessed from outside
__name	Private	Can't be seen and accessed from outside

# Private Data and Methods

- Any attribute/method with 2 leading underscores in its name (but none at the end) is **private** and can't be accessed outside of class
- Note: Names with two underscores at the beginning *and the end* are for built-in methods or attributes for the class
- Note: There is no 'protected' status in Python; so, subclasses would be unable to access these private data either.



# It's all objects...

- Everything in Python is really an object.
- We've seen hints of this already...  
`"hello".upper()`  
`list3.append('a')`  
`dict2.keys()`  
`int1.bit_length()`
- New object classes can easily be defined in addition to these built-in data-types.
- In fact, programming in Python is hybrid: it can be done in an object oriented fashion or not.

# It's all objects...

'__abs__',	'__le__',	'__rrshift__',
'__add__',	'__lshift__',	'__rshift__',
'__and__',	'__lt__',	'__rsub__',
'__bool__',	'__mod__',	'__rtruediv__',
'__ceil__',	'__mul__',	'__rxor__',
'__class__',	'__ne__',	'__setattr__',
'__delattr__',	'__neg__',	'__sizeof__',
'__dir__',	'__new__',	'__str__',
'__divmod__',	'__or__',	'__sub__',
'__doc__',	'__pos__',	'__subclasshook__',
'__eq__',	'__pow__',	'__truediv__',
'__float__',	'__radd__',	'__trunc__',
'__floor__',	'__rand__',	'__xor__',
'__floordiv__',	'__rdivmod__',	'bit_length',
'__format__',	'__reduce__',	'conjugate',
'__ge__',	'__reduce_ex__',	'denominator',
'__getattribute__',	'__repr__',	'from_bytes',
'__getnewargs__',	'__rfloordiv__',	'imag',
'__gt__',	'__rshift__',	'numerator',
'__hash__',	'__rmod__',	'real',
'__index__',	'__rmul__',	'to_bytes']
'__init__',	'__ror__',	
'__init_subclass__',	'__round__',	
'__int__',	'__rpow__',	
'__invert__',		

## • int methods

'__abs__',	'__ne__',	'__trunc__',
'__add__',	'__neg__',	'as_integer_ratio',
'__bool__',	'__new__',	'conjugate',
'__class__',	'__pos__',	'fromhex',
'__delattr__',	'__pow__',	'hex',
'__dir__',	'__radd__',	'imag',
'__divmod__',	'__rdivmod__',	'is_integer',
'__doc__',	'__reduce__',	'real']
'__eq__',	'__reduce_ex__',	
'__float__',	'__repr__',	
'__floordiv__',	'__rfloordiv__',	
'__format__',	'__rmod__',	
'__ge__',	'__rmul__',	
'__getattribute__',	'__round__',	
'__getformat__',	'__rpow__',	
'__getnewargs__',	'__rsub__',	
'__gt__',	'__rtruediv__',	
'__hash__',	'__set_format__',	
'__init__',	'__setattr__',	
'__init_subclass__',	'__sizeof__',	
'__int__',	'__str__',	
'__le__',	'__sub__',	
'__lt__',	'__subclasshook__',	
'__mod__',	'__truediv__',	
'__mul__',		

## • real methods