



idx	start	end
1	82847247	82848868
2	82847247	82879337



Genomic Position (bp)



Amino Acid Position



No domains



Transcript: ENST00000333891.14 | Protein: ENSP00000334319.8 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_domains_in_region	ENST00000413807.6	1									



16
J1478

Transcript: ENST00000413807.6 | Protein: ENSP00000404191.2 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	ENST00000423517.6										



No domains




Transcript: ENST00000423517.6 | Protein: ENSP00000388393.2

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	ENST00000426442.6										



no annotated protein

No domains



Transcript: ENST00000426442.6 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_features	ENST00000432078.2												



Transcript: ENST00000432078.2 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_features	ENST00000437081.2												



Transcript: ENST00000437081.2 | Protein: ENSP00000393760.2

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_features	ENST00000456006.2												



Transcript: ENST00000456006.2 | Protein: ENSP00000397928.2

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_features	ENST00000461143.1												



Transcript: ENST00000461143.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.


Figure 1 displays two panels illustrating the distribution of unique features across alternative transcripts.

The left panel is a dot plot showing the number of unique features for each alternative transcript. The y-axis is labeled "event" and the x-axis is labeled "alternative_transcript_id". The data points are as follows:


event	alternative_transcript_id	group	rank	unique_features
no_unique_features	XM_017012006.3			83,140,000
				83,080,000
				83,020,000
				82,960,000
				82,900,000
				82,840,000
				82,780,000

The right panel is a bar chart showing the number of unique features for each alternative transcript. The x-axis is labeled "domain_id" and the y-axis is labeled "unique_features". The data points are as follows:

domain_id	unique_features
canonical_domain	1000
alternative_domain	2000
canonical_domain	3000
alternative_domain	4000
canonical_domain	5000



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	XM_047420210.1								



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	XM_047420211.1								





Transcript: XM_047420211.1 | Protein: XP_047276167.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domains	canonical_junction	alternative_junction	in_cds
no_unique_features	XM_047420212.1								




Transcript: XM_047420212.1 | Protein: XP_047276168.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

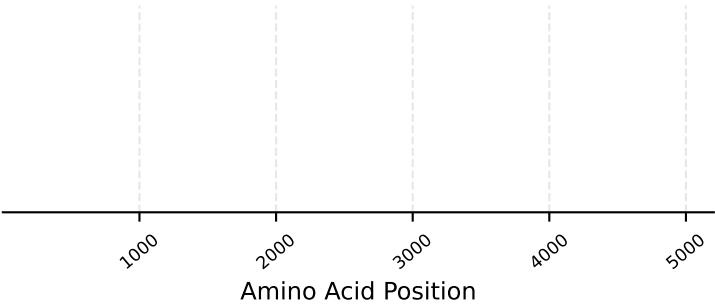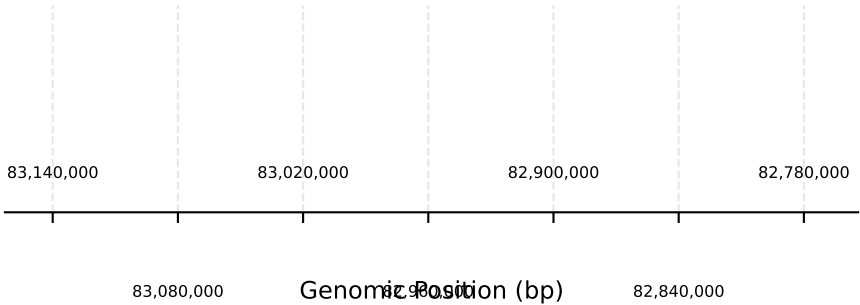

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain
no_unique_features	XM_047420213.1											

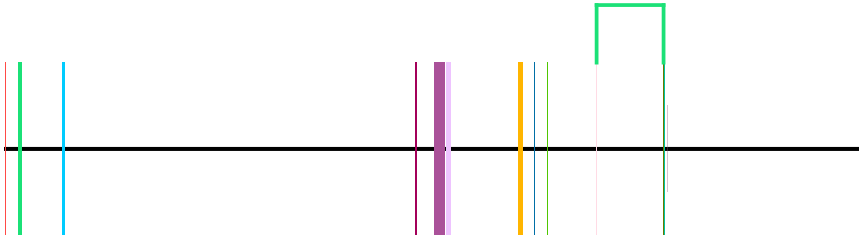

No domains

Transcript: XM_047420213.1 | Protein: XP_047276169.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.