

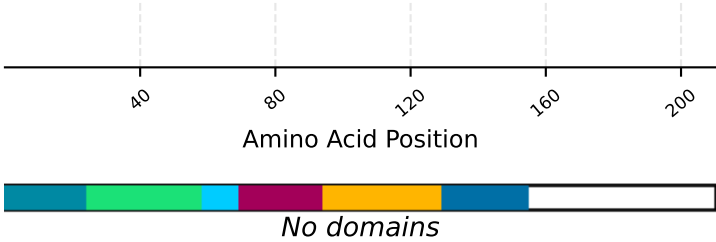


idx	start	end
1	53295639	53295839
2	53295639	53296244
3	53295639	53297850
4	53295639	53298045
5	53295941	53296244
6	53295941	53297850
7	53296275	53297850
	53297924	53298045

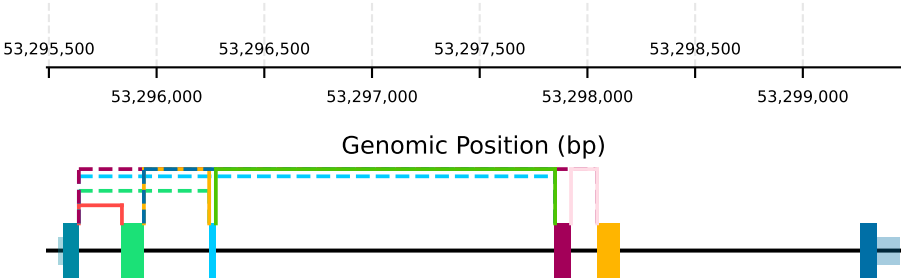



Transcript: ENST00000334478.9 | Protein: ENSP00000334188.4

event	transcript_id	group	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_domains_in_region	ENST00000677326.1	2					



Transcript: ENST00000677326.1 | Protein: N/A

event	transcript_id	group	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_domains_in_region	ENST00000628881.2	1					



Transcript: ENST00000628881.2 | Protein: ENSP00000486843.2 [longest CDS]


event	transcript_id	group	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
added_domain	ENST00000550846.5	3	SSF46579		69.0	0.0	1.0




Transcript: ENST00000550846.5 | Protein: ENSP00000454489.1 [longest CDS, most like canonical]

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

PFDN5 - H_sapiens | chr12:53,295,491-53,299,452 | 6 transcript(s) (page 2/2)


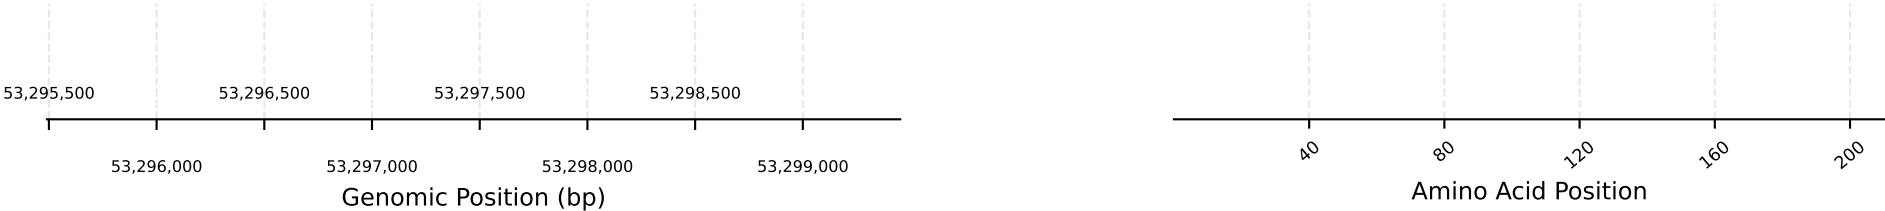


event	transcript_id	group	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_domains_in_region	ENST00000351500.7	2					

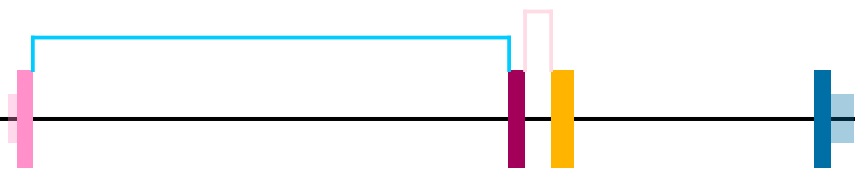

Transcript: ENST00000351500.7 | Protein: ENSP00000266964.4 [longest CDS, most like canonical]

event	transcript_id	group	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_domains_in_region	ENST00000243040.10	4					

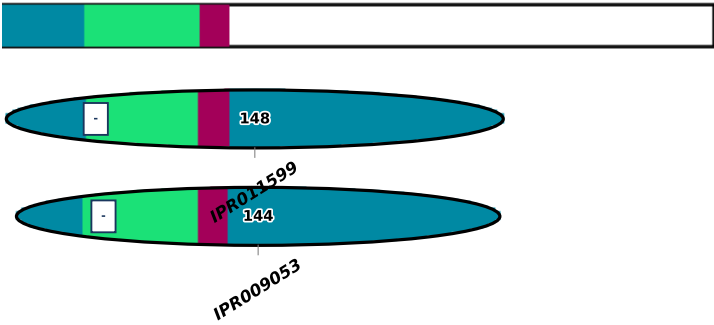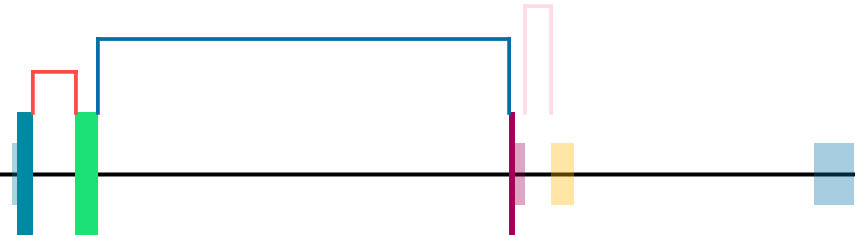

Transcript: ENST00000243040.10 | Protein: ENSP00000243040.6 [longest CDS, most like canonical]

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.