

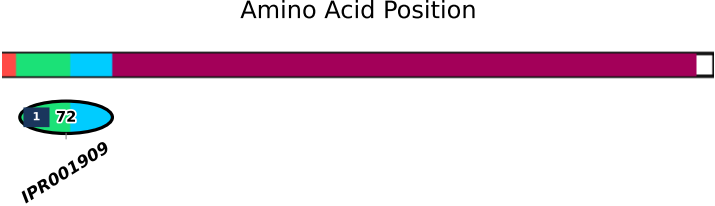



idx	start	end
1	64543802	64544264
2	64543802	64544306





Transcript: ENST00000309683.11 | Protein: ENSP00000309330.6 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
longer_domains	ENST00000920524.1	1		IPR001909	72.0	86.0	1.0	1.0					



Transcript: ENST00000920524.1 | Protein: ENSP00000590583.1 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_junctions	ENST00000447137.2												

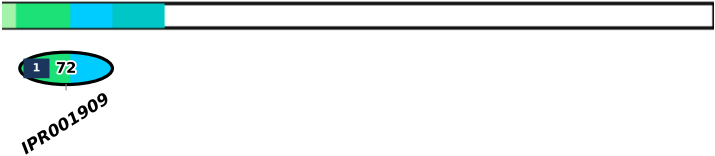

Transcript: ENST00000447137.2 | Protein: ENSP00000393506.2

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000470847.1												



Transcript: ENST00000470847.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

no annotated protein

No domains

[illegible]

No domains

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000920523.1								

1 73
IPR001909


event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000952412.1								

No domains

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

The figure displays genomic tracks for the transcript XM_024446743.1. The top track shows the gene model with exons as boxes and introns as lines. Below it are two tracks: 'alternative_transcript_id' and 'group'. The main part of the figure consists of three tracks: 'canonical', 'alternative_canonical', and 'alternative_noncanonical'. These tracks show the alignment of various alternative transcripts against the canonical one. The bottom track, 'junction_in_cds', highlights splice junctions within the coding sequence. A scale bar at the top indicates genomic coordinates from 64,522,000 to 64,558,000.

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative_canonical	alternative_noncanonical	junction_in_cds
no_unique_junctions	XM_024446743.1							



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	XM_024446746.2								



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction	alternative_junction	in_cds
no_uniquejunctions	XM_047420309.1								






event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	XM_047420310.1								



Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.


ZNF680 - H_sapiens | chr7:64,519,877-64,563,078 | 14 transcript(s) (page 4/4)

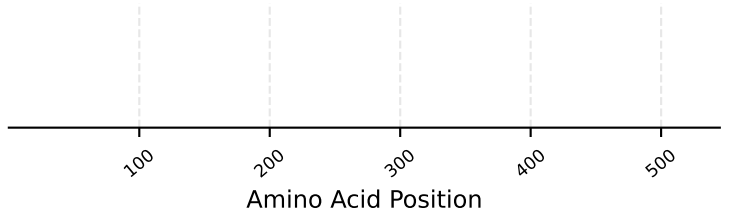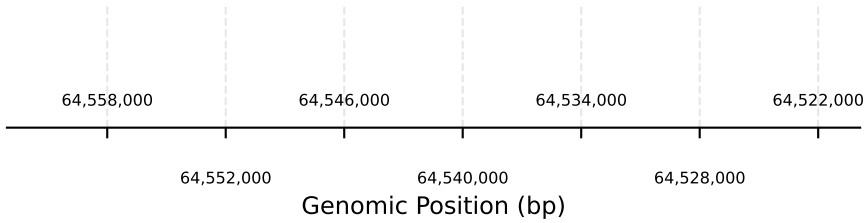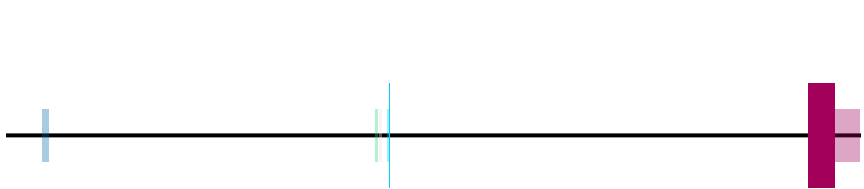[illegible]

No domains

Transcript: XM_047420311.1 | Protein: XP_047276267.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
transcript_doesnt_have_junctions	XM_047420312.1								



No domains

Transcript: XM_047420312.1 | Protein: XP_047276268.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.