


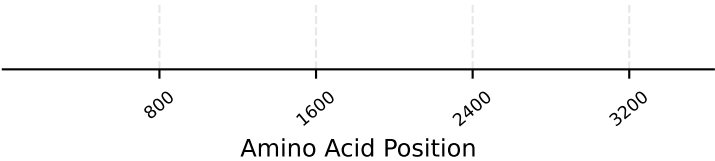


idx	start	end
1	33605470	33605863
2	33605470	33611041

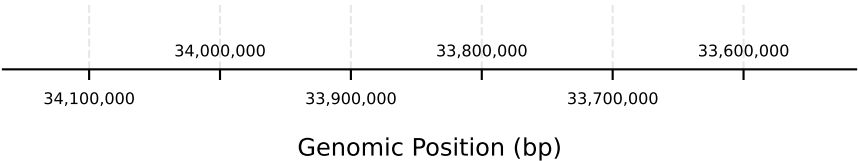

Transcript: ENST00000373381.9 | Protein: ENSP00000362479.4 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	junction	in_cds
unchanged_domains	ENST00000373388.7	1		IPR000859	109.0	109.0	1.0	1.0				





Transcript: ENST00000373388.7 | Protein: ENSP00000362486.3 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	junction	in_cds
transcript_doesnt_have_junctions	ENST00000338325.1											



Transcript: ENST00000338325.1 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	junction	in_cds
no_unique_junctions	ENST00000373377.1											



Transcript: ENST00000373377.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

Figure 1: Sashimi plot and table for ENST00000373380.5

The sashimi plot displays the transcript structure for ENST00000373380.5. The x-axis represents the genomic position in base pairs (bp), ranging from 34,100,000 to 33,600,000. The y-axis represents the number of reads. A single junction is shown at 33,800,000 bp with a value of 34,000,000.

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction	alternative_junction	junction_in_cds
no_unique_junctions	ENST00000373380.5								

[illegible]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_domain_id	alternative_domain_id	canonical_junction_in_cds	alternative_junction_in_cds
no_unique_junctions	XM_017000185.2									



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
no_unique_junctions	XM_017000191.2								



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
no_unique_junctions	XM_017000192.2								



Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction_id	alternative_junction_in_cds
no_unique_junctions	XM_017000193.2							



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
no_unique_junctions	XM_047443607.1							



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_domain_junction	alternative_domain_junction_in_cds
no_unique junctions	XM_047443642.1							



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domains	canonical_domain_id	junction_in_cds
no_unique_junctons	XM_047443656.1							



Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

Genomic Position (bp)

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_junctions	XM_047443661.1										

Amino Acid Position

No domains

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	alternative_domain_id	alternative_domain_id	alternative_domain_id	alternative_domain_id
no_unique_junctions	XM_047443666.1										

No domains

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_domain_id	alternative_domain_id	canonical_domain_id	alternative_domain_id
no_unique_junctions	XM_047443685.1									

No domains

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.