
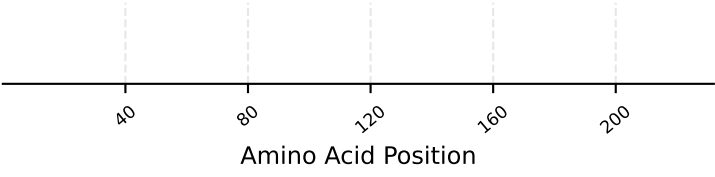




PRRG3 - H_sapiens | chrX:151,695,194-151,705,924 | 3 transcript(s)

idx	start	end
1	151695544	151698784
2	151698665	151698784

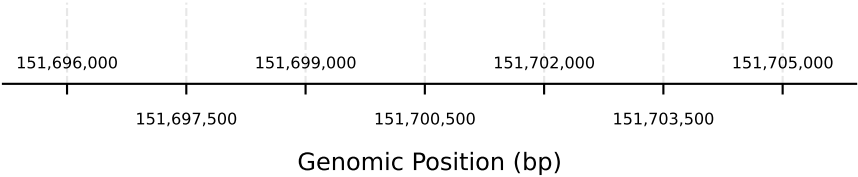


Transcript: ENST00000674457.1 | Protein: ENSP00000501544.1 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain
unchanged_domains	ENST00000370353.3	1		IPR000294	64.0	64.0	1.0	1.0			

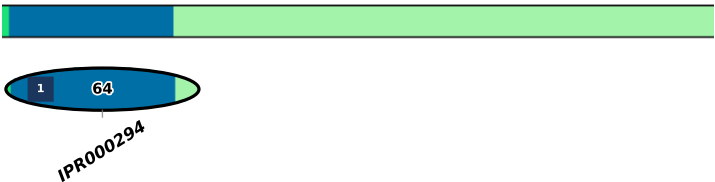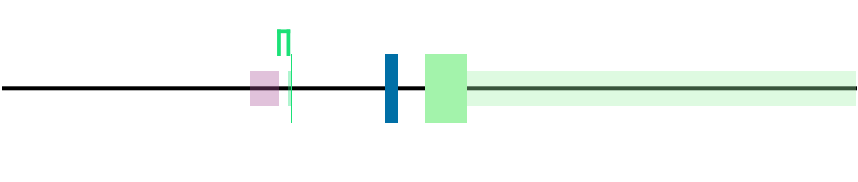

Transcript: ENST00000370353.3 | Protein: ENSP00000359378.3 [most like canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain
unchanged_domains	ENST00000884468.1	1		IPR000294	64.0	64.0	1.0	1.0			

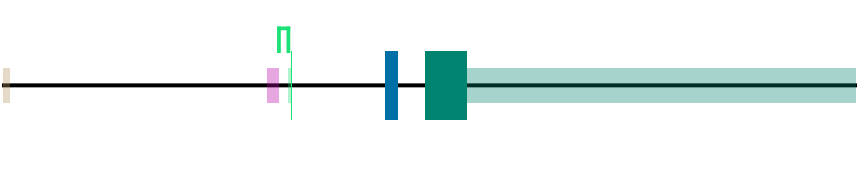

Transcript: ENST00000884468.1 | Protein: ENSP00000554527.1 [longest CDS]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.