



PFDN5 - H_sapiens | chr12:53,295,290-53,299,452 | 28 transcript(s) (page 1/7)

idx	start	end
1	53295639	53295839
2	53295639	53296244
3	53295639	53297850
4	53295639	53298045
5	53295941	53296244
6	53295941	53297850
7	53296275	53297850
	53297924	53298045

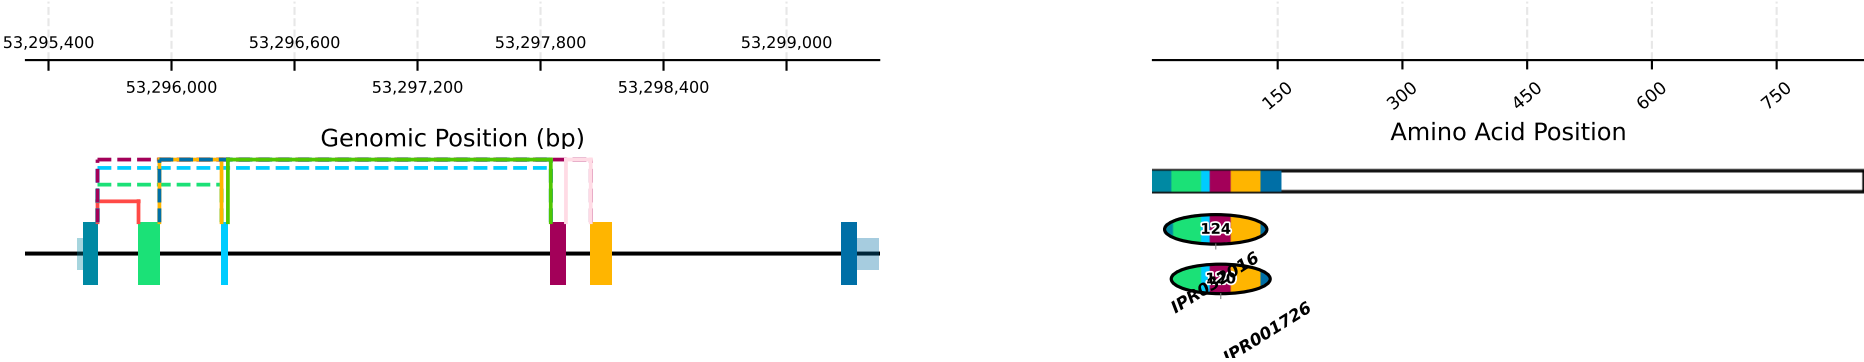

Transcript: ENST00000334478.9 | Protein: ENSP00000334188.4

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000551018.5					

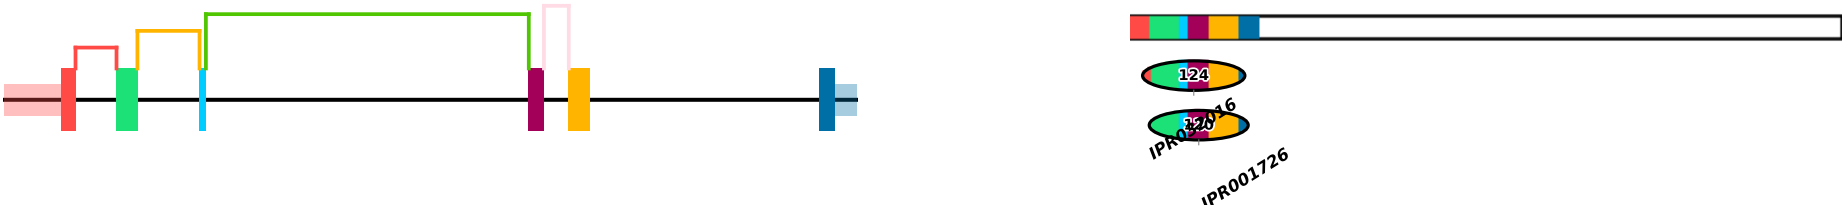

Transcript: ENST00000551018.5 | Protein: ENSP00000447942.1

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000550069.2					




Transcript: ENST00000550069.2 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
dropped_domain	ENST00000677326.1	IPR032016	124.0		1.0	0.0
dropped_domain	ENST00000677326.1	IPR001726	120.0		1.0	0.0



Transcript: ENST00000677326.1 | Protein: N/A

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

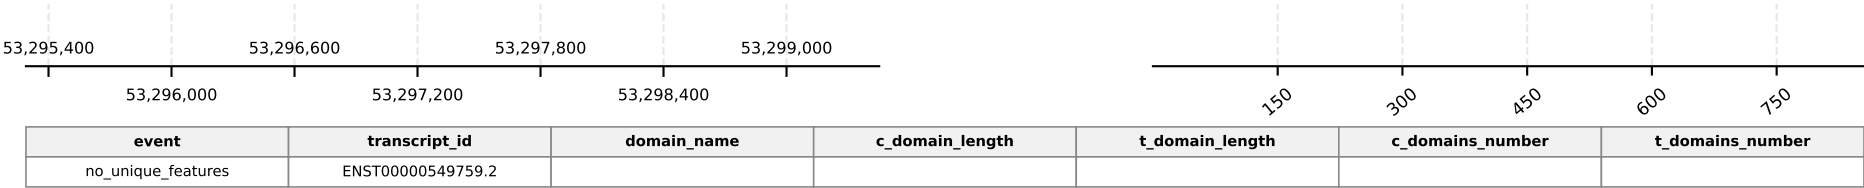

Transcript: ENST00000549759.2 | Protein: ENSP00000455296.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
shorter	ENST00000628881.2	IPR032016	124.0	68.0	1.0	1.0
shorter	ENST00000628881.2	IPR001726	120.0	72.0	1.0	1.0




Transcript: ENST00000628881.2 | Protein: ENSP00000486843.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000677199.1					





Transcript: ENST00000677199.1 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000678256.1					




Transcript: ENST00000678256.1 | Protein: N/A

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

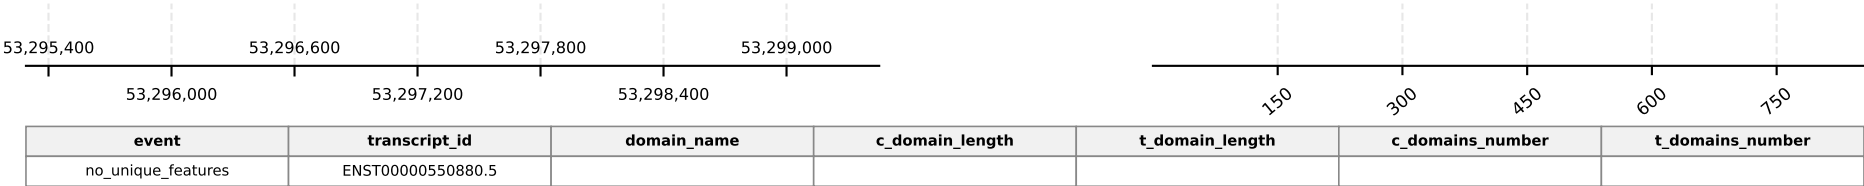


Transcript: ENST00000550880.5 | Protein: ENSP00000450068.1

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000676468.1					



Transcript: ENST00000676468.1 | Protein: ENSP00000504615.1

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
dropped_domain	ENST00000550846.5	IPR032016	124.0		1.0	0.0
dropped_domain	ENST00000550846.5	IPR001726	120.0		1.0	0.0
added_domain	ENST00000550846.5	SSF46579		69.0	0.0	1.0

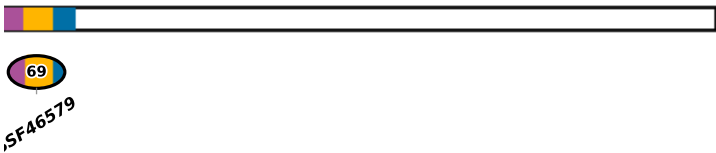


Transcript: ENST00000550846.5 | Protein: ENSP00000454489.1

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
shorter	ENST00000351500.7	IPR032016	124.0	68.0	1.0	1.0
shorter	ENST00000351500.7	IPR001726	120.0	81.0	1.0	1.0



Transcript: ENST00000351500.7 | Protein: ENSP00000266964.4 [longest CDS, most like canonical]

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

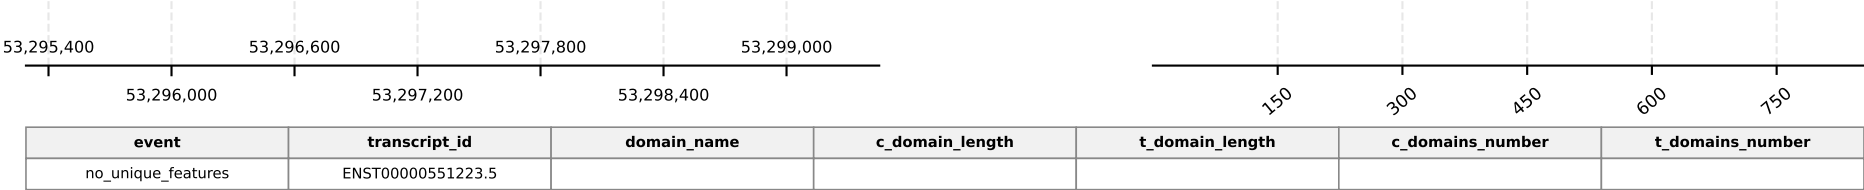

Transcript: ENST00000551223.5 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000678284.1					



Transcript: ENST00000678284.1 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000552341.5					




Transcript: ENST00000552341.5 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
dropped_domain	ENST00000243040.10	IPR032016	124.0		1.0	0.0
dropped_domain	ENST00000243040.10	IPR001726	120.0		1.0	0.0




Transcript: ENST00000243040.10 | Protein: ENSP00000243040.6

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

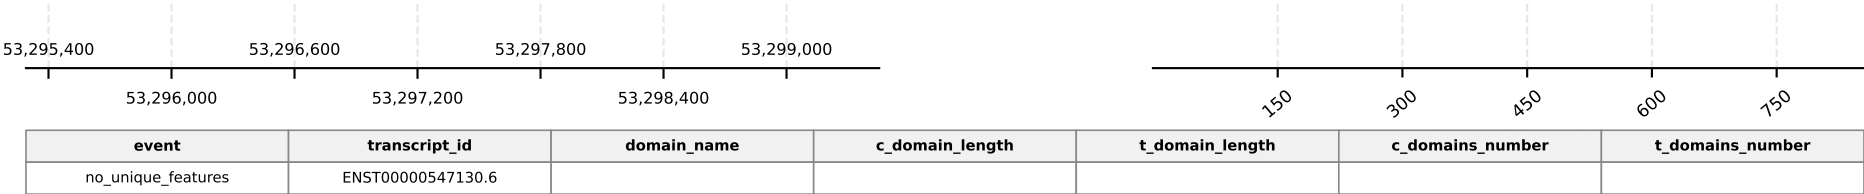


Transcript: ENST00000547130.6 | Protein: ENSP00000449388.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000549995.1					




Transcript: ENST00000549995.1 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000935332.1					

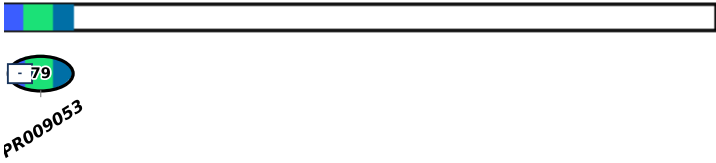


Transcript: ENST00000935332.1 | Protein: ENSP00000605391.1

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000677184.1					



Transcript: ENST00000677184.1 | Protein: N/A

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

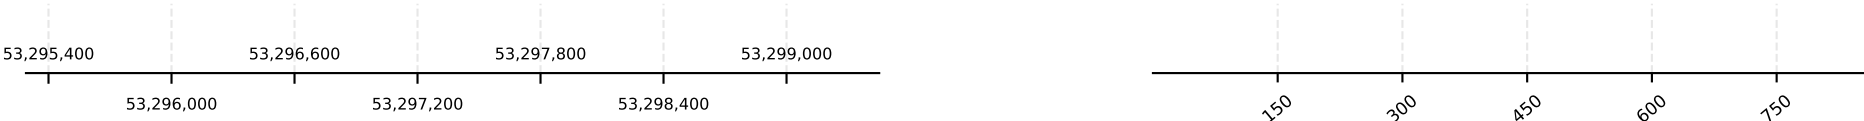

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000677712.1					



Transcript: ENST00000677712.1 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
transcript_doesnt_have_features	ENST00000552742.6					



Transcript: ENST00000552742.6 | Protein: ENSP00000450380.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
transcript_doesnt_have_features	ENST00000550513.1					



Transcript: ENST00000550513.1 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENST00000547228.1					



Transcript: ENST00000547228.1 | Protein: N/A

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

The left number line has major ticks at 53,295,400, 53,296,000, 53,297,200, 53,298,400, and 53,299,000. The right number line has major ticks at 150, 300, 450, 600, and 750.

The diagram illustrates the effect of domain decomposition on the number of iterations. On the left, a sequence of operations is shown as colored blocks: grey, green, orange, purple, and blue. Red and pink brackets above the blocks indicate the number of iterations required for each. The right part shows a single large blue block labeled "No domains", representing a single iteration for the entire sequence.

Transcript: ENST00000553171.2 | Protein: N/A

Diagram illustrating a protein structure with domains. The structure is shown as a horizontal line with a red rectangular domain, a purple rectangular domain, and a yellow rectangular domain. A green bar is labeled "No domains".

Transcript: ENST00000552548.6 | Protein: N/A

Diagram illustrating a sequence of events or domains. A horizontal line is marked with four colored blocks: blue, red, yellow, and green. A legend bar at the top right shows three colored segments (blue, red, yellow) labeled "No domains".

Transcript: ENST00000550964.6 | Protein: N/A

The diagram consists of two parts. On the left, a horizontal black line has a blue square and a yellow square positioned above it. On the right, a bar chart shows a blue bar and a yellow bar, with the text "No domains" written below them.

Transcript: ENST00000548984.1 | Protein: N/A

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, 5 or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.