


PFDN5 - M_musculus | chr15:102,234,550-102,239,925 | 8 transcript(s) (page 1/2)

idx	start	end
1	102234695	102234868
2	102234695	102235253
3	102234695	102236957
4	102234695	102236957
5	102234695	102237147
6	102234970	102236957
7	102234970	102236957
8	102235284	102236957
	102237031	102237147

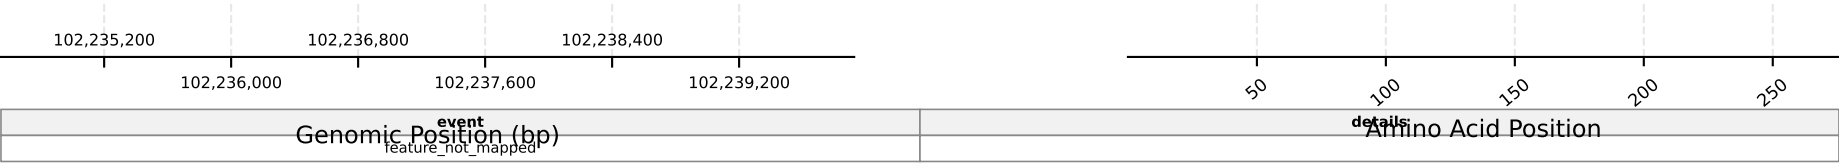

Transcript: ENSMUST00000166658.8 | Protein: ENSMUSP00000129178.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_domains_in_region	ENSMUST00000062492.11					




Transcript: ENSMUST00000062492.11 | Protein: ENSMUSP00000126970.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENSMUST00000168805.8					



Transcript: ENSMUST00000168805.8 | Protein: N/A


event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_domains_in_region	ENSMUST00000170627.8					

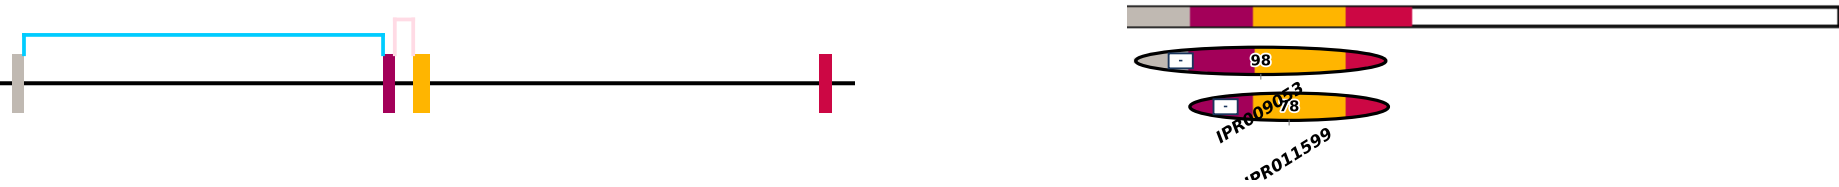

Transcript: ENSMUST00000170627.8 | Protein: ENSMUSP00000131245.2 [longest CDS]

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

PFDN5 - M_musculus | chr15:102,234,550-102,239,925 | 8 transcript(s) (page 2/2)

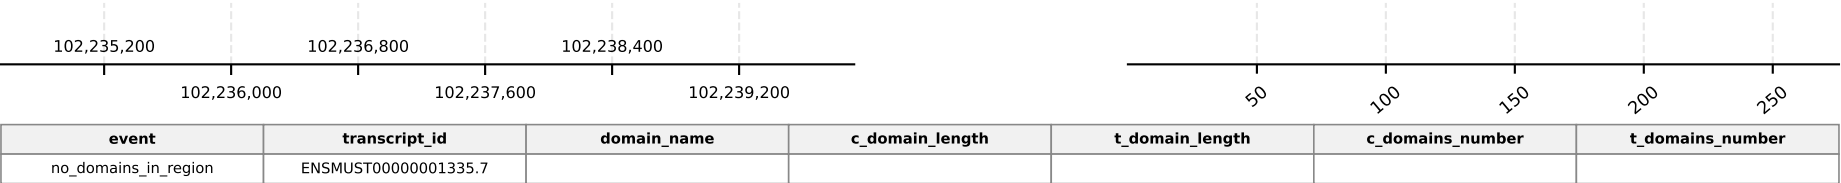


Transcript: ENSMUST00000001335.7 | Protein: ENSMUSP00000001335.7

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
added_domain	ENSMUST00000169637.8	cd23157		60.0	0.0	1.0




Transcript: ENSMUST00000169637.8 | Protein: ENSMUSP00000128263.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENSMUST00000165671.8					

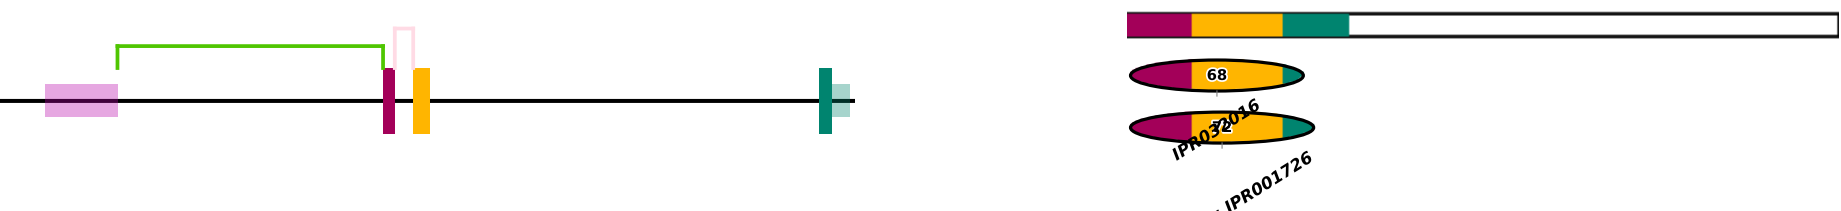

Transcript: ENSMUST00000165671.8 | Protein: ENSMUSP00000128526.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
no_unique_features	ENSMUST00000165717.4					

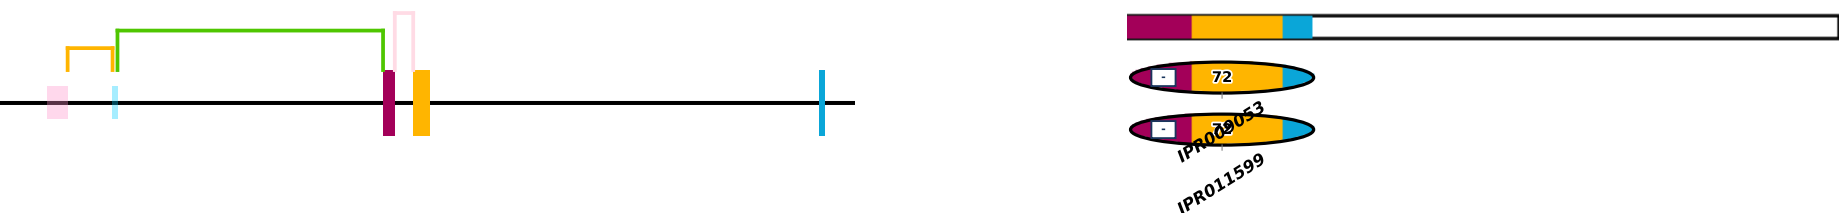

Transcript: ENSMUST00000165717.4 | Protein: ENSMUSP00000132441.2

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, 5 or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.