





Transcript: ENST00000334478.9 | Protein: ENSP00000334188.4

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
dropped_domain	ENST00000677326.1	IPR032016	124.0		1.0	0.0
dropped_domain	ENST00000677326.1	IPR001726	120.0		1.0	0.0

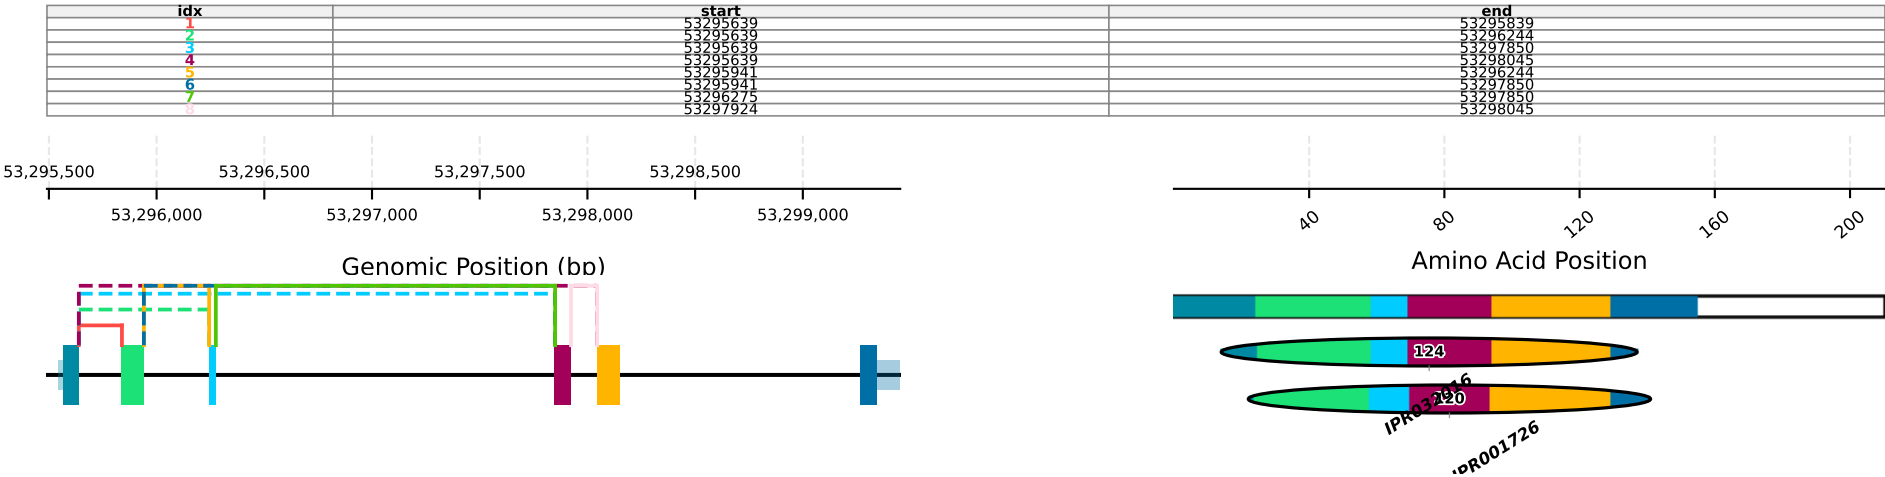

Transcript: ENST00000677326.1 | Protein: N/A

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
shorter	ENST00000628881.2	IPR032016	124.0	68.0	1.0	1.0
shorter	ENST00000628881.2	IPR001726	120.0	72.0	1.0	1.0

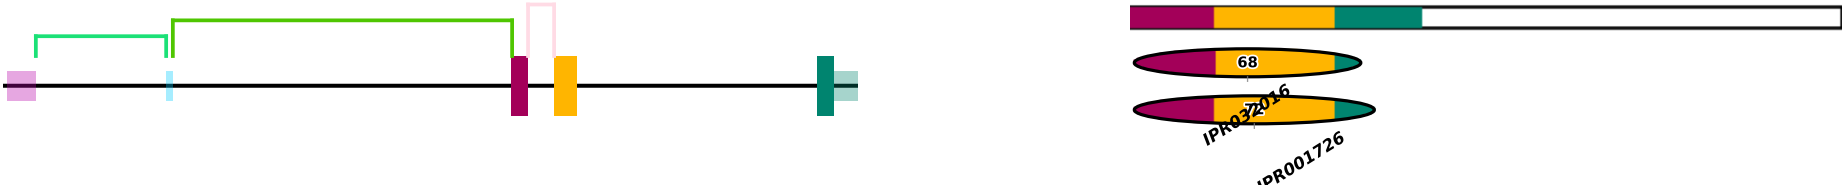

Transcript: ENST00000628881.2 | Protein: ENSP00000486843.2

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
dropped_domain	ENST00000550846.5	IPR032016	124.0		1.0	0.0
dropped_domain	ENST00000550846.5	IPR001726	120.0		1.0	0.0
added_domain	ENST00000550846.5	SSF46579		69.0	0.0	1.0





Transcript: ENST00000550846.5 | Protein: ENSP00000454489.1

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.

PFDN5 - H_sapiens | chr12:53,295,491-53,299,452 | 6 transcript(s) (page 2/2)





event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
shorter	ENST00000351500.7	IPR032016	124.0	68.0	1.0	1.0
shorter	ENST00000351500.7	IPR001726	120.0	81.0	1.0	1.0

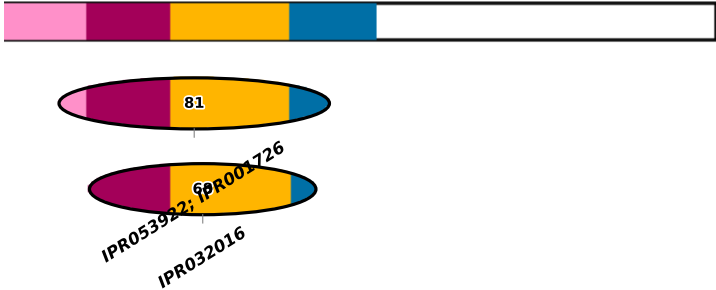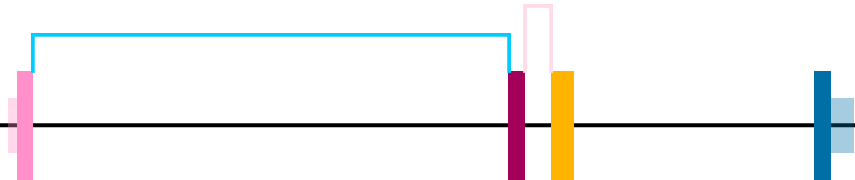

Transcript: ENST00000351500.7 | Protein: ENSP00000266964.4 [longest CDS, most like canonical]

event	transcript_id	domain_name	c_domain_length	t_domain_length	c_domains_number	t_domains_number
dropped_domain	ENST00000243040.10	IPR032016	124.0		1.0	0.0
dropped_domain	ENST00000243040.10	IPR001726	120.0		1.0	0.0

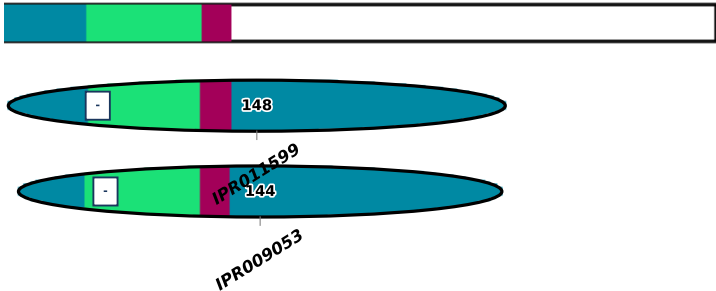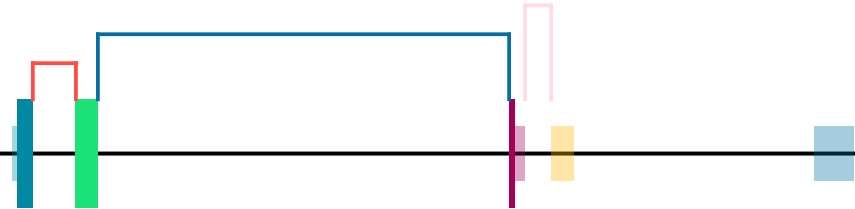

Transcript: ENST00000243040.10 | Protein: ENSP00000243040.6

Mark inside each domain — its tier on the InterPro entry-type ladder: 1 = Domain/Repeat · 2 = Family/Homologous superfamily · 3 = member-DB hit (G3DSA/PTHR/SSF/cd/PF) · S = site/PTM, ranked with tier 2. FILLED = kept, and compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — a 2, S or 3 when more than half of it is already covered by a higher tier, and an entry of ANY tier when it duplicates a longer kept entry of the same accession that overlaps it. A transcript whose domains carry NO mark has no RepresentativeDomains entry: its annotation comes from DomainEvent/DomainType, which states no entry type, so the ladder cannot rank it and every domain is compared as-is.