


idx	start	end
1	121433036	121436122
2	121433033	121436122



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domains	canonical_junction	alternative_junction_in_cds
no_domains_in_region	ENST00000932951.1	1						

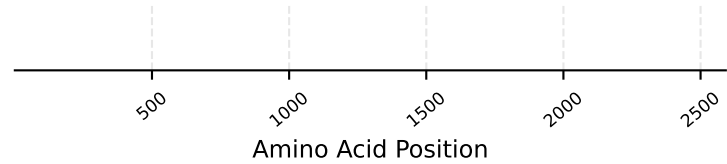

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
transcript_doesnt_have_junctions	ENST00000474243.1								




event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domains	canonical_junction	alternative_junction_in_cds
transcript_doesnt_have_junctions	ENST00000488282.1							




Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction	alternative_junction	in_cds
no_unique_junctions	ENST00000932952.1								

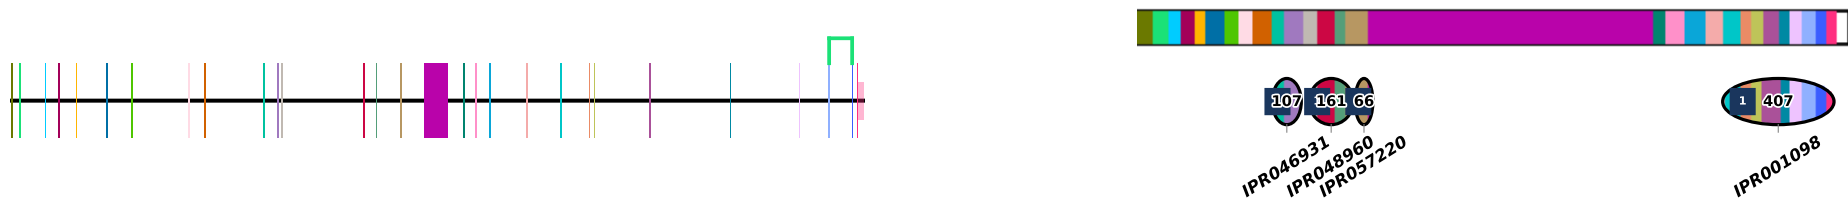

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction	alternative_junction	in_cds
no_unique_junctions	ENST00000932953.1								

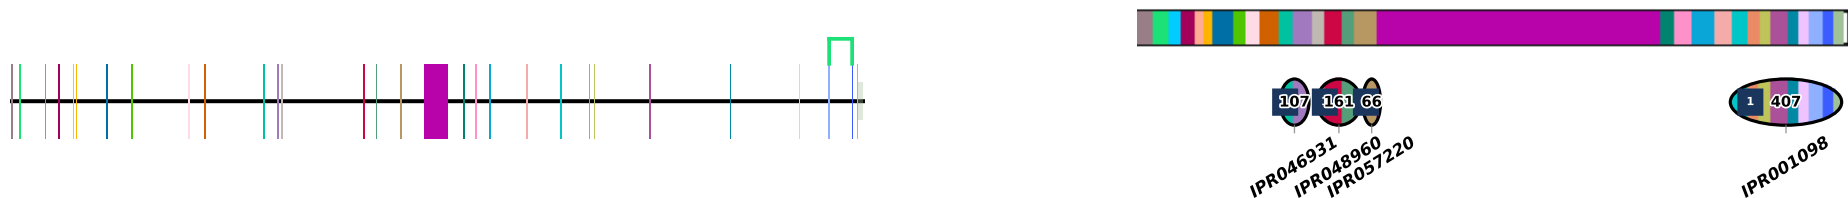

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.