


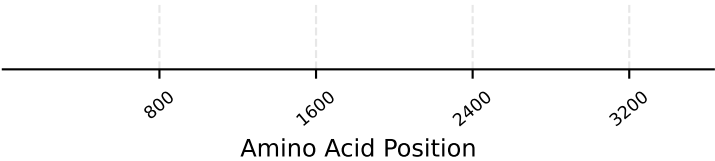


idx	start	end
1	33605470	33605863
2	33605470	33611041

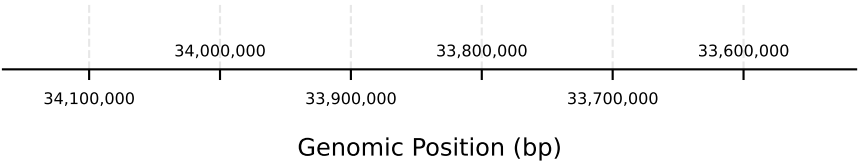


Transcript: ENST00000373381.9 | Protein: ENSP00000362479.4 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
unchanged_domains	ENST00000373388.7	1		IPR000859	109.0	109.0	1.0	1.0					




Transcript: ENST00000373388.7 | Protein: ENSP00000362486.3 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000338325.1												



Transcript: ENST00000338325.1 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_junctions	ENST00000373377.1												



Transcript: ENST00000373377.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

Figure 1: Sashimi plot and table for ENST00000373380.5

The sashimi plot displays the transcript structure for ENST00000373380.5. The x-axis represents the genomic position in base pairs (bp), ranging from 34,100,000 to 33,600,000. The y-axis represents the number of reads. A single junction is observed at 33,800,000 bp, with a value of 34,000,000.

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction	alternative_junction	junction_in_cds
no_unique_junctions	ENST00000373380.5								



Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

34,000,000

33,800,000


33,600,000

34,100,000


33,900,000

33,700,000


event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_junctions	ENST00000619121.4										




Transcript: ENST00000619121.4 | Protein: ENSP00000483463.1



Transcript: XM_017000185.2 | Protein: XP_016855674.1



Transcript: XM_017000191.2 | Protein: XP_016855680.1






Transcript: XM_017000192.2 | Protein: XP_016855681.1




Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.


CSMD2 - H_sapiens | chr1:33,513,997-34,165,842 | 19 transcript(s) (page 4/5)

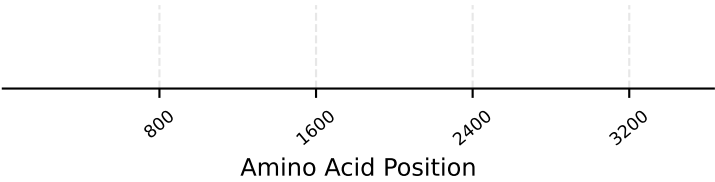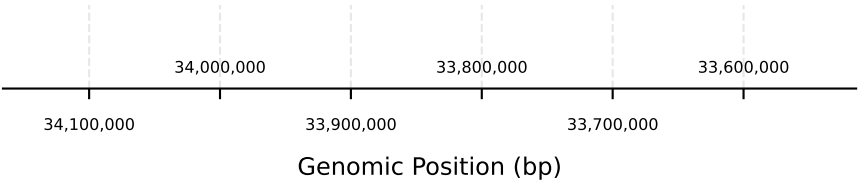


Transcript: XM_017000193.2 | Protein: XP_016855682.1



Transcript: XM_047443607.1 | Protein: XP_047299563.1






Transcript: XM_047443642.1 | Protein: XP_047299598.1




Transcript: XM_047443656.1 | Protein: XP_047299612.1




Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

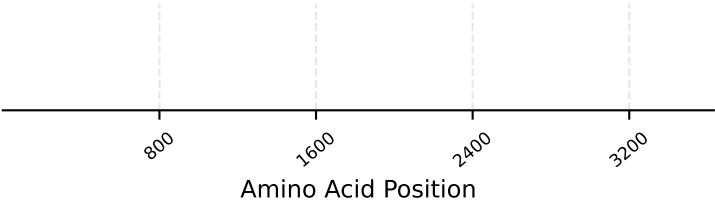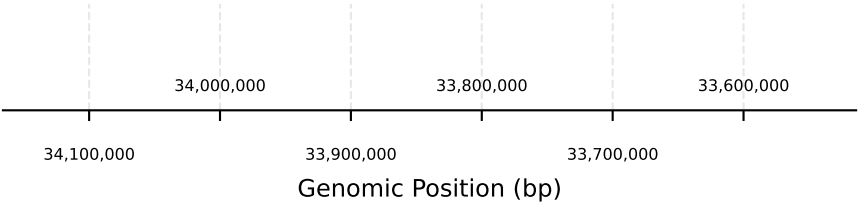

Transcript: XM_047443661.1 | Protein: XP_047299617.1



Transcript: XM_047443666.1 | Protein: XP_047299622.1



Transcript: XM_047443685.1 | Protein: XP_047299641.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.