

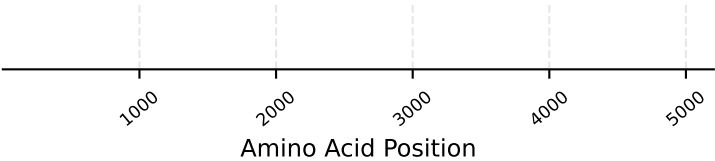


idx	start	end
1	82847247	82848868
2	82847247	82879337

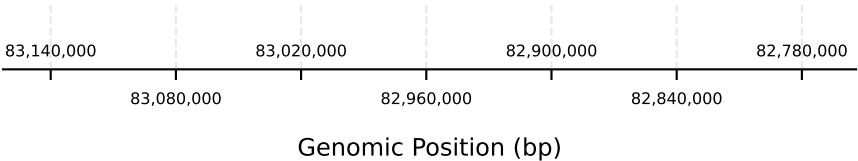

Transcript: ENST00000333891.14 | Protein: ENSP00000334319.8 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
added_domain	ENST00000413807.6	1		IPR001478			46.0	0.0	1.0				



Transcript: ENST00000413807.6 | Protein: ENSP00000404191.2 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_features	ENST00000423517.6												



Transcript: ENST00000423517.6 | Protein: ENSP00000388393.2

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_features	ENST00000426442.6												



Transcript: ENST00000426442.6 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_features	ENST00000432078.2												



Transcript: ENST00000432078.2 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_features	ENST00000437081.2												



Transcript: ENST00000437081.2 | Protein: ENSP00000393760.2

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_features	ENST00000456006.2												



Transcript: ENST00000456006.2 | Protein: ENSP00000397928.2

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_features	ENST00000461143.1												




Transcript: ENST00000461143.1 | Protein: N/A [no protein]


Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

The figure displays a Sashimi plot and a corresponding table for alternative splicing analysis. The Sashimi plot at the top shows read counts for alternative transcripts (XM_017012006.3) across different exon-intron junctions. The x-axis represents the genomic position, with major ticks at 83,140,000, 83,080,000, 83,020,000, 82,960,000, 82,900,000, 82,840,000, and 82,780,000. The y-axis represents the number of reads, with major ticks at 1000, 2000, 3000, 4000, and 5000. The plot shows a high number of reads for the canonical transcript (XM_017012006.3) and a lower number of reads for alternative transcripts (XM_017012006.3).


event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	XM_017012006.3								



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	XM_047420210.1								



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	XM_047420211.1								





event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	XM_047420212.1								




Transcript: XM_047420212.1 | Protein: XP_047276168.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

PCLO - H_sapiens | chr7:82,754,011-83,162,884 | 13 transcript(s) (page 4/4)

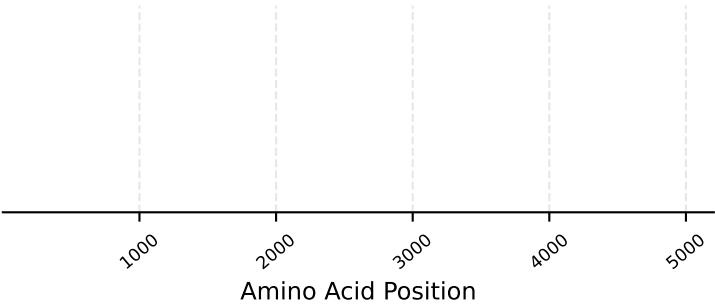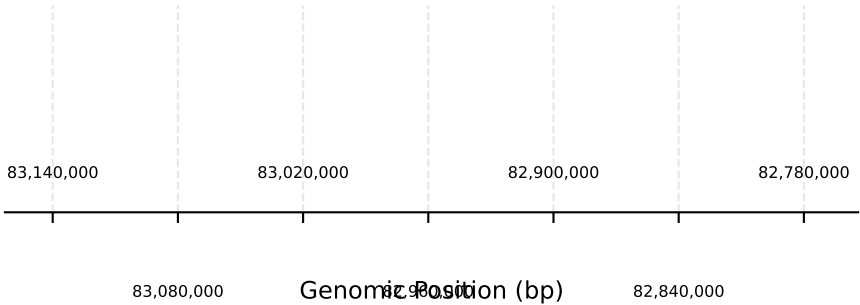

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain
no_unique_features	XM_047420213.1											

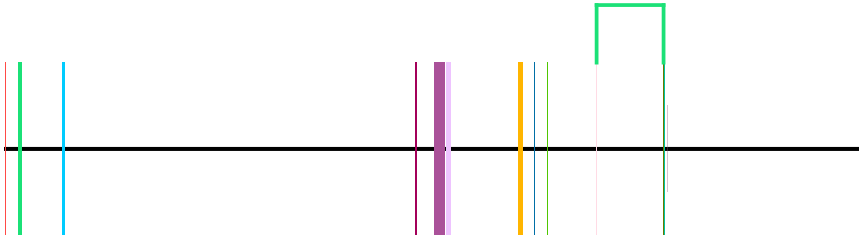

Transcript: XM_047420213.1 | Protein: XP_047276169.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.