


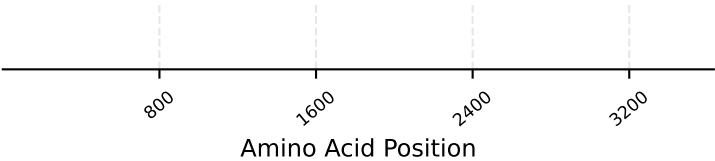


idx	start	end
1	33605470	33605863
2	33605470	33611041

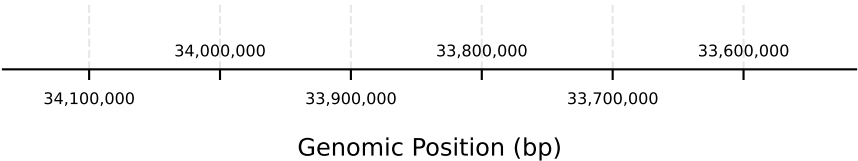

Transcript: ENST00000373381.9 | Protein: ENSP00000362479.4 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
dropped_domain	ENST00000373388.7	1		IPR000859	109.0		1.0	0.0			




Transcript: ENST00000373388.7 | Protein: ENSP00000362486.3 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_features	ENST00000338325.1										



Transcript: ENST00000338325.1 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	ENST00000373377.1										




Transcript: ENST00000373377.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

The figure consists of two horizontal bar charts. The left chart displays the number of alternative transcripts, with values ranging from 34,000,000 to 33,600,000. The right chart displays the number of alternative junctions, with values ranging from 800 to 3200. Both charts show a decreasing trend across the domains.

event	alternative_transcript_id	group	rank	domain_id	canonical_transcript	alternative_transcript	canonical_junction	alternative_junction	in_cds
no_unique_features	ENST00000373380.5								
























Transcript: ENST00000465819.1 | Protein: ENSP00000509557.1

no annotated protein

No domains

Transcript: ENST00000471438.2 | Protein: N/A [no protein]

no annotated protein

No domains

Transcript: ENST00000489419.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

[illegible]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domains	canonical_junction	alternative_junction_in_cds
no_unique_features	XM_017000185.2							




event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
no_unique_features	XM_017000191.2								






event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
no_unique_features	XM_017000192.2								



Only InterPro Domain and Repeat entries are drawn, and only those that are compared — so no domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.



The diagram shows a single protein structure with a single domain (green) and a long C-terminal tail (black). The tail is labeled "No domains".



Transcript: XM_047443656.1 | Protein: XP_047299612.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

Genomic Position (bp)

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_features	XM_047443661.1										

Amino Acid Position

800 1600 2400 3200

No domains

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	alternative_domain_id	alternative_domain_id	alternative_domain_id	alternative_domain_id
no_unique_features	XM_047443666.1										

No domains

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_domain_id	alternative_domain_id	canonical_junction_id	alternative_junction_id	in_cds
no_unique_features	XM_047443685.1										




No domains

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.