


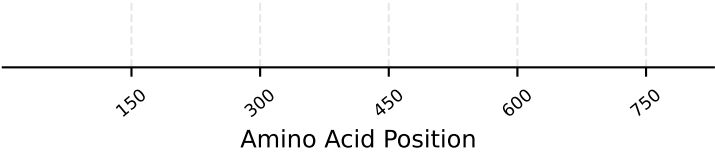
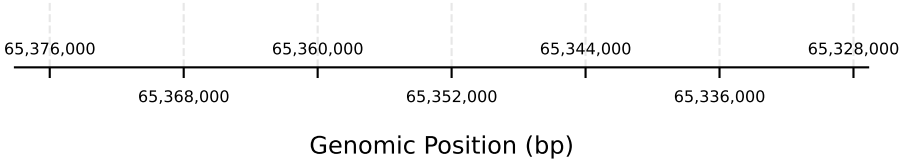


idx	start	end
1	65332148	65333257
2	65332106	65333257

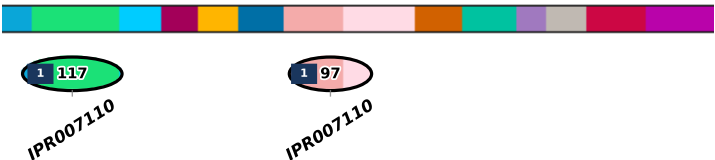



Transcript: ENST00000327987.9 | Protein: ENSP0000032773.4 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
increased_domain_number	ENST00000920202.1	1		IPR007110			97.0	0.0	1.0		




Transcript: ENST00000920202.1 | Protein: ENSP00000590261.1 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
increased_domain_number	ENST00000920210.1	1		IPR007110			97.0	0.0	1.0		

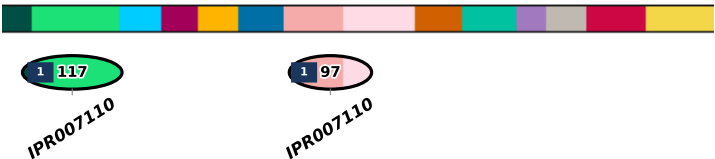

Transcript: ENST00000920210.1 | Protein: ENSP00000590269.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_junctions	ENST00000558354.5										




Transcript: ENST00000558354.5 | Protein: ENSP00000454105.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

no annotated protein


No domains



no annotated protein

No domains

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

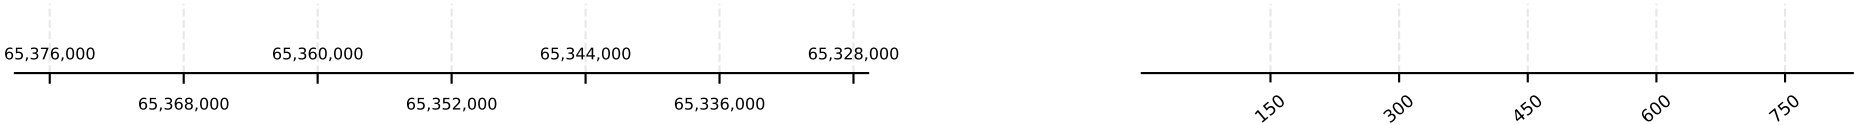

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_junctions	ENST00000863891.1												



Transcript: ENST00000863891.1 | Protein: ENSP00000533950.1

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_junctions	ENST00000920200.1												



Transcript: ENST00000920200.1 | Protein: ENSP00000590259.1

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_junctions	ENST00000920201.1												



Transcript: ENST00000920201.1 | Protein: ENSP00000590260.1


event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_junctions	ENST00000920203.1												




Transcript: ENST00000920203.1 | Protein: ENSP00000590262.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.


event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction	in_cds
no_unique_junctions	ENST00000920205.1									

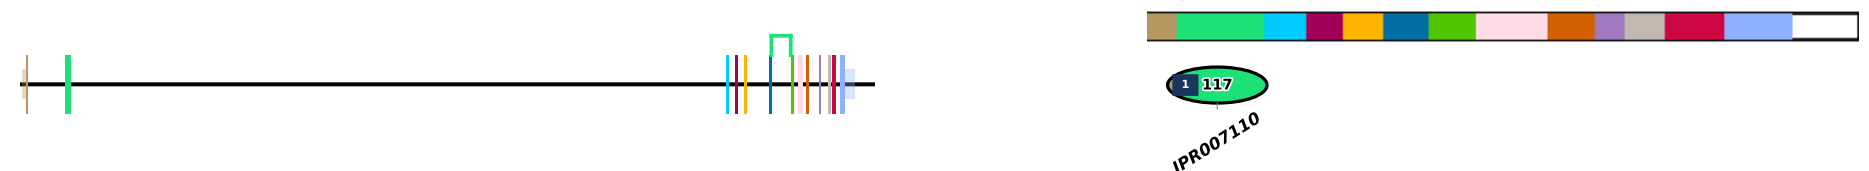

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000920206.1									

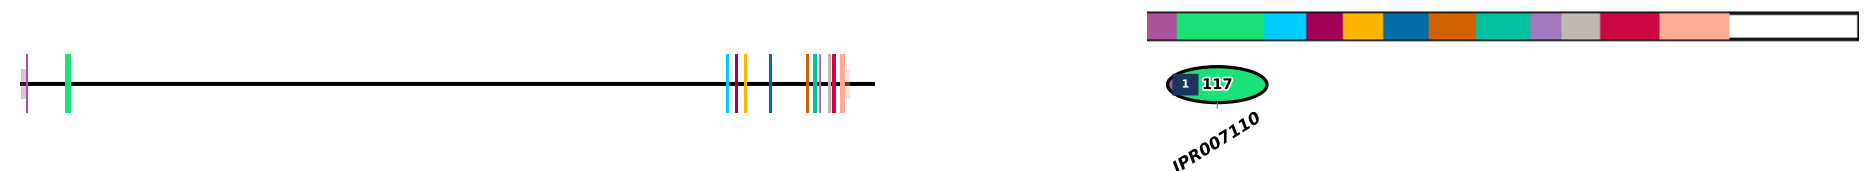


event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
no_unique_junctions	ENST00000920207.1								

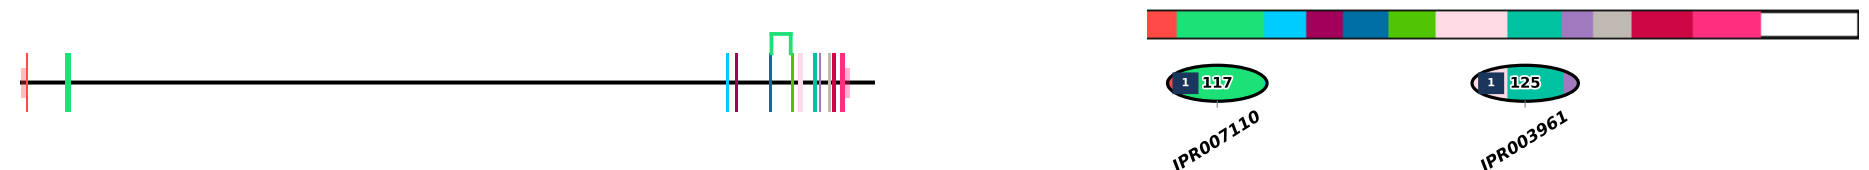


Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000920209.1									

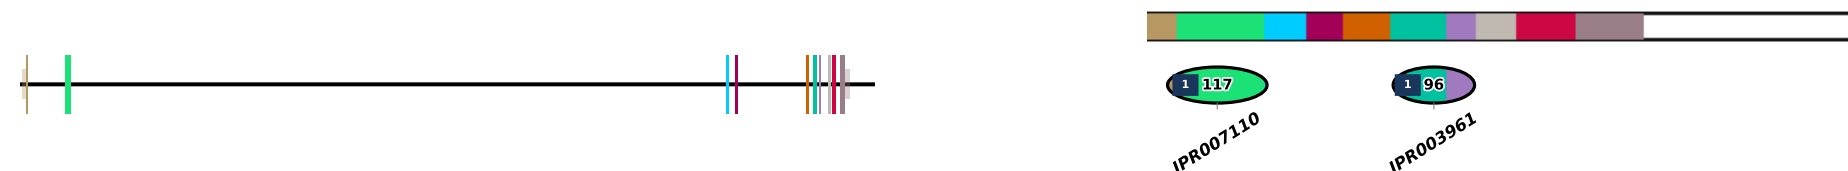

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
no_unique_junctions	ENST00000920211.1								

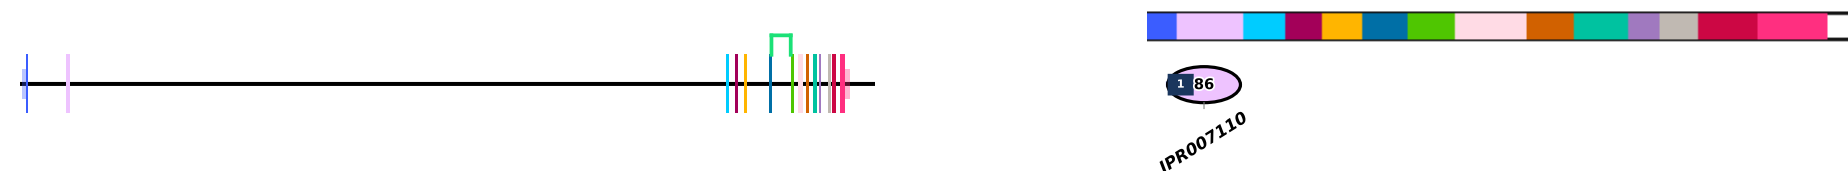

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
no_unique_junctions	XM_011522243.1								



Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

Genomic Position (bp)

Amino Acid Position

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	alternative_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_unique_junctions	XM_047433374.1										

No domains

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.