



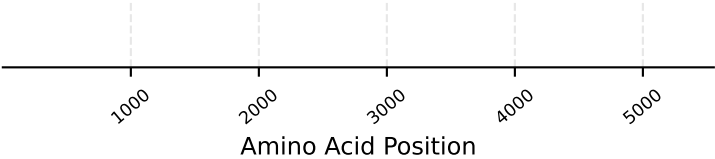
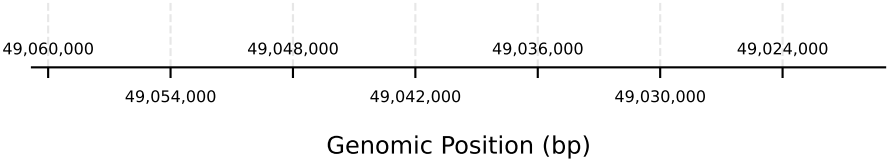


idx	start	end
1	49041535	49041655
2	49041532	49041655




Transcript: ENST00000301067.12 | Protein: ENSP00000301067.7 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
no_domains_in_region	ENST00000689944.1	1									




Transcript: ENST00000689944.1 | Protein: ENSP00000508812.1 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000549743.1										



Transcript: ENST00000549743.1 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000550356.1										



Transcript: ENST00000550356.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.



event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000552391.2												



Transcript: ENST00000552391.2 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000650290.2												



Transcript: ENST00000650290.2 | Protein: ENSP00000497218.2

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000681974.1												



Transcript: ENST00000681974.1 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000682693.1												



Transcript: ENST00000682693.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.



event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000682886.1											




Transcript: ENST00000682886.1 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000683043.1											



Transcript: ENST00000683043.1 | Protein: N/A [no protein]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	junction	alternative_junction	in_cds
no_unique_junctions	ENST00000683543.2											

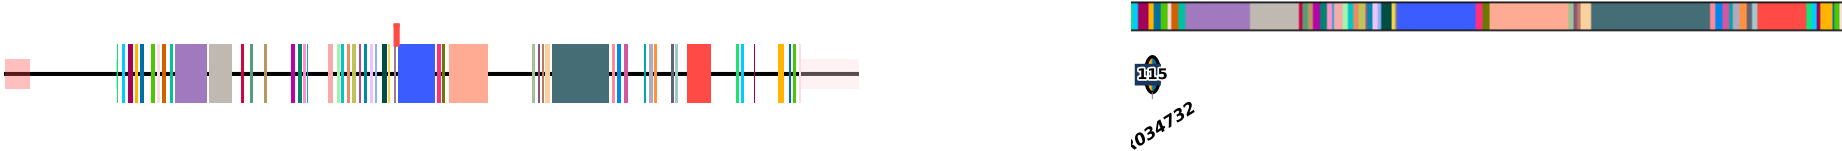

Transcript: ENST00000683543.2 | Protein: ENSP00000506726.1

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000683863.1											



Transcript: ENST00000683863.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

Diagram illustrating a horizontal line with a blue vertical bar, a green vertical bar, an orange vertical bar, and a pink vertical bar. To the right, a small colored bar is shown above a long white bar labeled "No domains".

no annotated protein

No domains



The diagram shows a protein with a signal sequence (orange) and a transmembrane domain (purple). The signal sequence is located at the N-terminus and is followed by a transmembrane domain. The protein is shown in a cross-section, with the signal sequence on the left and the transmembrane domain on the right. The signal sequence is labeled "Signal sequence" and the transmembrane domain is labeled "Transmembrane domain". The text "No domains" is written below the transmembrane domain.

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000685554.1												



Transcript: ENST00000685554.1 | Protein: ENSP00000508640.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000685979.1												



Transcript: ENST00000685979.1 | Protein: ENSP00000508906.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000685982.1												



Transcript: ENST00000685982.1 | Protein: ENSP00000508613.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000686151.1												




Transcript: ENST00000686151.1 | Protein: N/A [no protein]

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.




event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000686564.1												




Transcript: ENST00000686564.1 | Protein: ENSP00000509290.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000686968.1												




Transcript: ENST00000686968.1 | Protein: ENSP00000509151.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000687201.1												



Transcript: ENST00000687201.1 | Protein: ENSP00000510037.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000687241.1												



Transcript: ENST00000687241.1 | Protein: ENSP00000509842.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.



event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000688095.1												



Transcript: ENST00000688095.1 | Protein: ENSP00000510007.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000688411.1												



Transcript: ENST00000688411.1 | Protein: ENSP00000510146.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000689060.1												



Transcript: ENST00000689060.1 | Protein: ENSP00000509018.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	canonical_domain	alternative_domain	in_cds
transcript_doesnt_have_junctions	ENST00000689143.1												



Transcript: ENST00000689143.1 | Protein: ENSP00000509839.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

A horizontal line with a small colored segment on the right labeled "No domains".

A horizontal line with several colored segments (red, green, blue, yellow) and a label "No domains" pointing to a specific region.

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction_in_cds
transcript_doesnt_have_junctions	ENST00000692841.1								



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction_id	alternative_junction_in_cds
transcript_doesnt_have_junctions	ENST00000692973.1							



Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.