



idx	start	end
1	64543802	64544264
2	64543802	64544306



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_domain_id	alternative_domain_id	canonical_junction	alternative_junction	in_cds
longer_domains	ENST00000920524.1	1		IPR001909	72.0	86.0	1.0	1.0			

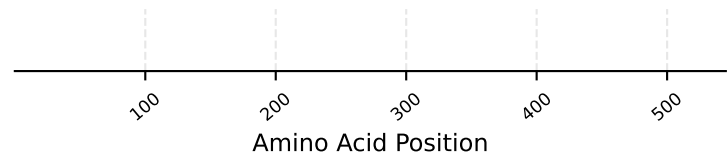

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction	alternative_junction	in_cds
no_unique_junctions	ENST00000447137.2								

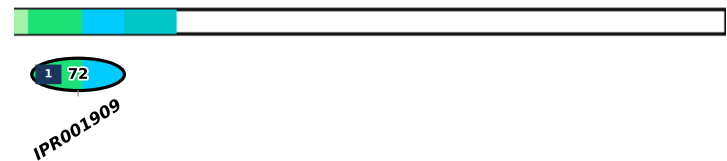

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domains	canonical_junction	alternative_junction_in_cds
transcript_doesnt_have_junctions	ENST00000470847.1							



Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

no annotated protein

No domains

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domains	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000476563.1								

No domains

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domain	canonical_junction	alternative_junction	in_cds
transcript_doesnt_have_junctions	ENST00000920523.1								

1 73
IPR001909


[illegible]

No domains

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

The figure displays genomic tracks for the transcript XM_024446743.1. The top track shows the gene model with exons as boxes and introns as lines. Below it are two tracks: 'alternative_transcript_id' and 'group'. The main part of the figure is a large plot with a y-axis labeled 'event' and an x-axis labeled 'rank'. The y-axis has values 64,558,000, 64,546,000, 64,534,000, and 64,522,000. The x-axis has values 100, 200, 300, 400, and 500. The plot area contains several colored bars representing different events: blue for canonical junctions, red for alternative junctions, green for canonical alternative junctions, and yellow for alternative alternative junctions. A legend at the bottom identifies these colors.

event	alternative_transcript_id	group	rank	domain_id	canonical_junction	alternative_junction	canonical_alternative_junction	alternative_alternative_junction	in_cds
no_unique_junctions	XM_024446743.1								




Transcript: XM_024446746.2 | Protein: XP_024302514.1


Transcript: XM_047420309.1 | Protein: XP_047276265.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

ZNF680 - H_sapiens | chr7:64,519,877-64,563,078 | 14 transcript(s) (page 4/4)

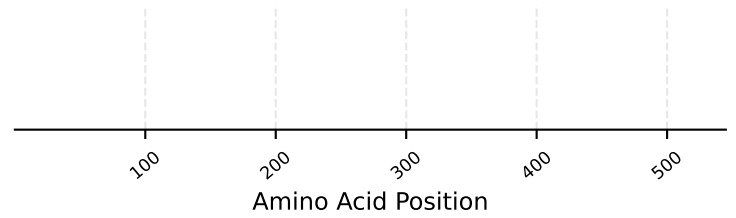


event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction
transcript_doesnt_have_junctions	XM_047420311.1								

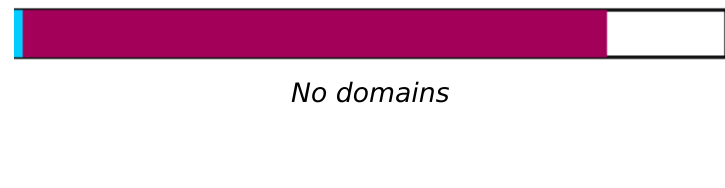

Transcript: XM_047420311.1 | Protein: XP_047276267.1

event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction	alternative_junction
transcript_doesnt_have_junctions	XM_047420312.1								

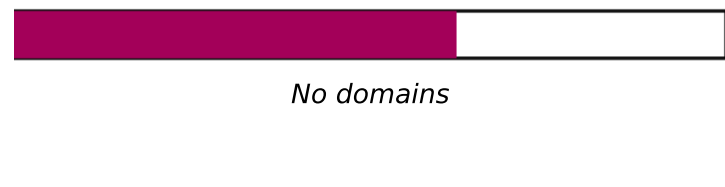

Transcript: XM_047420312.1 | Protein: XP_047276268.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3D5A/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.