




PRRG3 - H_sapiens | chrX:151,694,606-151,705,924 | 11 transcript(s) (page 1/3)

idx	start	end
1	151695544	151698784
2	151698665	151698784



Genomic Position (bp)

Amino Acid Position

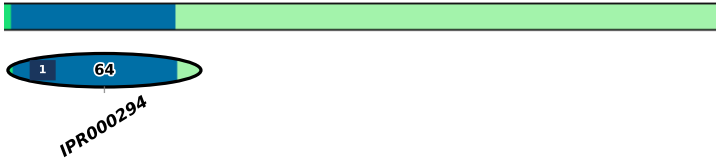

Transcript: ENST00000674457.1 | Protein: ENSP00000501544.1 [canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
unchanged_domains	ENST00000370353.3	1		IPR000294	64.0	64.0	1.0	1.0					




Transcript: ENST00000370353.3 | Protein: ENSP00000359378.3 [most like canonical]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
unchanged_domains	ENST00000884468.1	1		IPR000294	64.0	64.0	1.0	1.0					



Transcript: ENST00000884468.1 | Protein: ENSP00000554527.1 [longest CDS]

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
no_unique_junctions	ENST00000370354.5												



Transcript: ENST00000370354.5 | Protein: ENSP00000359379.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

PRRG3 - H_sapiens | chrX:151,694,606-151,705,924 | 11 transcript(s) (page 2/3)



event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000448324.1												



Transcript: ENST00000448324.1 | Protein: ENSP00000394121.1

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000448726.5												



Transcript: ENST00000448726.5 | Protein: ENSP00000411509.1

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000538575.5												



Transcript: ENST00000538575.5 | Protein: ENSP00000440217.1

event	alternative_transcript_id	group	rank	domain_id	canonical	alternative	canonical	alternative	canonical	alternative	canonical	alternative	in_cds
transcript_doesnt_have_junctions	ENST00000652529.1												



Transcript: ENST00000652529.1 | Protein: ENSP00000498287.1

Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.

A horizontal axis representing Genomic Position (bp). The scale ranges from 151,696,000 to 151,705,000. Major tick marks are labeled at 151,696,000, 151,699,000, 151,702,000, and 151,705,000. Minor tick marks are present every 500 bp, with labels at 151,697,500, 151,700,500, and 151,703,500.

event	alternative_transcript_id	group	rank	domain_id	canonical_domain	alternative_domains	canonical_junction	alternative_junction_in_cds
no_unique_junctions	ENST00000674374.1							

Amino Acid Position scale from 40 to 200.



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	alternative_domain_id	canonical_junction_in_cds	alternative_junction_in_cds
transcript_doesnt_have_junctions	ENST00000674441.1								



event	alternative_transcript_id	group	rank	domain_id	canonical_domain_id	alternative_domain_id	canonical_junction_id	alternative_junction_id	in_cds
transcript_doesnt_have_junctions	ENST00000913985.1								



Only InterPro Domain and Repeat entries are drawn, and only those are compared — so every domain the events table names appears here. Neither drawn nor compared: InterPro Family and Homologous_superfamily entries, the residue features (active/binding/conserved site, PTM), and member-database signatures (G3DSA/PTHR/SSF/cd/PF), which are not curated structural units. FILLED = compared. HOLLOW = removed before the comparison, so no row of the events table can refer to it — an entry that duplicates a longer kept entry of the same accession overlapping it.