

Generated by Talend Real-time Big Data Platform

Project Name	talend_prem	GENERATION DATE	Feb 28, 2024, 4:39:01 PM
AUTHOR	developer, developer	Talend Real-time VERSION	8.0.1.20240118_0425-patch

Summary

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

Project Description


Properties	Values
Name	talend_prem
Language	java

Description	

Description

Properties	Values
Name	products_report
Author	developer, developer
Version	0.1
Purpose	
Status	
Description	
Creation	Feb 26, 2024, 3:03:50 PM
Modification	Feb 28, 2024, 11:21:06 AM

Preview Picture

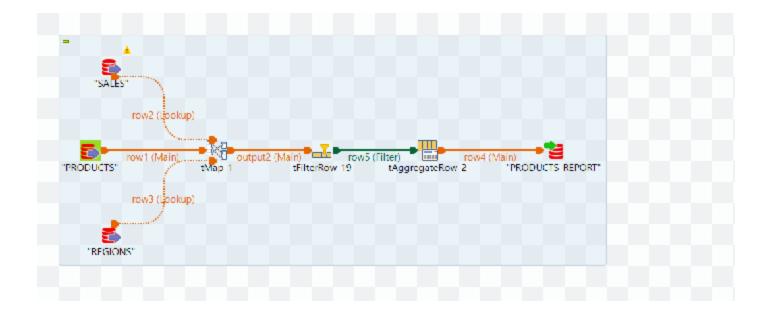

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false

On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt?	Туре	Value	Source

Component List

Component Name	Component Type
tAggregateRow_2	tAggregateRow
tDBInput_1	tOracleInput
tDBInput_2	tOracleInput

tDBInput_3	tOracleInput
tDBOutput_1	tOracleOutput
tFilterRow_19	tFilterRow
tMap_1	tMap

Components Description

Component tAggregateRow

UNIQUE NAME	tAggregateRow_2	INPUT(S)	tFilterRow_19
LABEL	UNIQUE_NAME	OUTPUT(S)	tDBOutput_1

Component Farameters.		
Properties	Values	
Unique Name	tAggregateRow_2	
Component Name	tAggregateRow	
Version	0.102 (ALPHA)	
Family	Processing	
Startable	false	
SUBTREE_START	false	
END_OF_FLOW	false	
Activate	true	
DUMMY	false	

tStatCatcher Statistics	false
Help	org.talend.help.tAggregateRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SV	MITTEH
Schema	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244 - PRODUCTS_REPORT
Group by	[{OUTPUT_COLUMN=REGION_NAME, INPUT_COLUMN=REGION_NAME}, {OUTPUT_COLUMN=PRODUCT_NAME, INPUT_COLUMN=PRODUCT_NAME}]
	[{OUTPUT_COLUMN=TOTAL_PRICE, FUNCTION=sum, INPUT_COLUMN=TOTAL_PRICE, IGNORE_NULL=false}]
Delimiter (only for list operation)	, , , , , , , , , , , , , , , , , , ,
Use financial precision, this is the max precision for "sum" and "avg" operations, checked option heaps more memory and slower than unchecked.	true
Check type overflow (slower)	false
Check ULP (Unit in the Last Place), ensure that a value will be incremented or decremented correctly, only for float and double types. (slower)	false
Label format	UNIQUE_NAME

Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for PRODUCTS_REPORT:

Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_NAME	false	String	128		true	
TOTAL_PRICE	false	BigDecimal	38		true	
REGION_NAME	false	String	128		true	

Original Function Parameters: Component tOracleInput

The second secon	UNIQUE NAME	tDBInput_1	INPUT(S)	none
	LABEL	TABLE	OUTPUT(S)	tMap_1

Properties	Values
Database	tOracleInput
Unique Name	tDBInput_1
Component Name	tOracleInput
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/Oracle
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tOracleInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244
Use an existing connection	false
Component List	
Connection Type	ORACLE_SERVICE_NAME
DB Version	ORACLE_18

г

URL	"10.34.47.244"		
Host	"10.34.47.244"		
Database Driver	ORACLE_SERVICE_NAME		
Port	"1521"		
Database	"talend.34.47.244"		
Local Service Name	"talend.34.47.244"		
Oracle schema	"DEMO_USER"		
Username	"demo_user"		
Password	******		
URL	"jdbc:oracle:oci:/@talend"		
REPOSITORY_ALLOW_AUTO_SV	WHICH		
Schema	Built-In		
Table Name	"PRODUCTS"		
Query Type	Built-In		
Guess Schema	11.1		
Query	"SELECT DEMO_USER.PRODUCTS.PRODUCT_ID, DEMO_USER.PRODUCTS.PRODUCT_NAME, DEMO_USER.PRODUCTS.PRICE, DEMO_USER.PRODUCTS.CATEGORY, DEMO_USER.PRODUCTS.MANUFACTURER, DEMO_USER.PRODUCTS.QUANTITY_AVAILABLE FROM DEMO_USER.PRODUCTS"		
Specify a data source alias	false		
Data source alias	ш		
Mapping	oracle_id		
Additional JDBC Parameters	пп		
Convert XMLType To Java Type.	false		

CONVERT_XMLTYPE	
Encoding	"ISO-8859-15"
Use fetch size	false
Fetch size	1000
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=PRODUCT_ID, TRIM=false}, {SCHEMA_COLUMN=PRODUCT_NAME, TRIM=false}, {SCHEMA_COLUMN=PRICE, TRIM=false}, {SCHEMA_COLUMN=CATEGORY, TRIM=false}, {SCHEMA_COLUMN=MANUFACTURER, TRIM=false}, {SCHEMA_COLUMN=QUANTITY_AVAILABLE, TRIM=false}]
No null values	false
Support NLS	false
Label format	TABLE
Hint format	UNIQUE_NAME <brcomment< td=""></brcomment<>
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for PRODUCTS:

Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_ID	false	BigDecimal	38		true	
PRODUCT_NAME	false	String	128		true	
PRICE	false	BigDecimal	38		true	

CATEGORY	false	String	26	true	
MANUFACTURER	false	String	26	true	
QUANTITY_AVAILABLE	false	BigDecimal	38	true	

Original Function Parameters: Component tOracleInput

The second secon	UNIQUE NAME	tDBInput_2	INPUT(S)	none
	LABEL	TABLE	OUTPUT(S)	tMap_1

Component Parameters:				
Properties	Values			
Database	racleInput			
Unique Name	tDBInput_2			
Component Name	tOracleInput			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/Oracle			
Start	false			
Startable	true			
SUBTREE_START	false			
END_OF_FLOW	false			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			

Help	org.talend.help.tOracleInput			
Update components	true			
IREPORT_PATH				
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java			
Subjob color				
Title color				
Enable parallel execution	false			
Number of parallel executions	2			
PARALLELIZE_KEEP_EMPTY	false			
Property Type	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244			
Use an existing connection	false			
Component List				
Connection Type	ORACLE_SERVICE_NAME			
DB Version	ORACLE_18			
URL	"10.34.47.244"			
Host	"10.34.47.244"			
Database Driver	ORACLE_SERVICE_NAME			
Port	"1521"			
Database	"talend.34.47.244"			
Local Service Name	"talend.34.47.244"			
Oracle schema	"DEMO_USER"			
Username	"demo_user"			

Password	******			
URL	"jdbc:oracle:oci:/@talend"			
REPOSITORY_ALLOW_AUTO_SV	MITTEH			
Schema	Built-In			
Table Name	"SALES"			
Query Type	Built-In			
Guess Schema				
Query	"SELECT DEMO_USER.SALES.SALE_ID, DEMO_USER.SALES.PRODUCT_II DEMO_USER.SALES.REGION_ID, DEMO_USER.SALES.SALE_DATE, DEMO_USER.SALES.QUANTITY_SOLD, DEMO_USER.SALES.TOTAL_PRIC DEMO_USER.SALES.CUSTOMER_ID, DEMO_USER.SALES.SALESPERSON_ID FROM DEMO_USER.SALES"			
Specify a data source alias	false			
Data source alias	пп			
Mapping	oracle_id			
Additional JDBC Parameters	пп			
Convert XMLType To Java Type.	false			
CONVERT_XMLTYPE				
Encoding	"ISO-8859-15"			
Use fetch size	false			
Fetch size	1000			
Trim all the String/Char columns	false			
Trim column	[{SCHEMA_COLUMN=SALE_ID, TRIM=false}, {SCHEMA_COLUMN=PRODUCT_ID, TRIM=false}, {SCHEMA_COLUMN=REGION_ID, TRIM=false}, {SCHEMA_COLUMN=SALE_DATE, TRIM=false}, {SCHEMA_COLUMN=QUANTITY_SOLD, TRIM=false}, {SCHEMA_COLUMN=TOTAL_PRICE, TRIM=false}, {SCHEMA_COLUMN=CUSTOMER_ID, TRIM=false}, {SCHEMA_COLUMN=SALESPERSON_ID, TRIM=false}]			

No null values	false
Support NLS	false
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for SALES:

Column	Key	Туре	Length	Precision	Nullable	Comment
SALE_ID	false	BigDecimal	38		true	
PRODUCT_ID	false	BigDecimal	38		true	
REGION_ID	false	BigDecimal	38		true	
SALE_DATE	false	java.util.Date	7		true	
QUANTITY_SOLD	false	BigDecimal	38		true	
TOTAL_PRICE	false	Integer	38		true	
CUSTOMER_ID	false	BigDecimal	38		true	
SALESPERSON_ID	false	BigDecimal	38		true	

Original Function Parameters:

Component tOracleInput

The second secon	UNIQUE NAME	tDBInput_3	INPUT(S)	none
	LABEL	TABLE	OUTPUT(S)	tMap_1

Component Parameters:				
Properties	Values			
Database	tOracleInput			
Unique Name	tDBInput_3			
Component Name	tOracleInput			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/Oracle			
Start	false			
Startable	true			
SUBTREE_START	false			
END_OF_FLOW	false			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			
Help	org.talend.help.tOracleInput			
Update components	true			
IREPORT_PATH				
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java			
Subjob color				

Title color			
Enable parallel execution	false		
Number of parallel executions	2		
PARALLELIZE_KEEP_EMPTY	false		
Property Type	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244		
Use an existing connection	false		
Component List			
Connection Type	ORACLE_SERVICE_NAME		
DB Version	ORACLE_18		
URL	"10.34.47.244"		
Host	"10.34.47.244"		
Database Driver	ORACLE_SERVICE_NAME		
Port	"1521"		
Database	"talend.34.47.244"		
Local Service Name	"talend.34.47.244"		
Oracle schema	"DEMO_USER"		
Username	"demo_user"		
Password	******		
URL	"jdbc:oracle:oci:/@talend"		
REPOSITORY_ALLOW_AUTO_S	WHTEH		
Schema	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244 - REGIONS		
Table Name	"REGIONS"		

Query Type	Built-In
Guess Schema	nn
Query	"SELECT DEMO_USER.REGIONS.REGION_ID, DEMO_USER.REGIONS.REGION_NAME, DEMO_USER.REGIONS.COUNTRY, DEMO_USER.REGIONS.STATE, DEMO_USER.REGIONS.CITY FROM DEMO_USER.REGIONS"
Specify a data source alias	false
Data source alias	пи
Mapping	oracle_id
Additional JDBC Parameters	
Convert XMLType To Java Type.	false
CONVERT_XMLTYPE	
Encoding	"ISO-8859-15"
Use fetch size	false
Fetch size	1000
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=REGION_ID, TRIM=false}, {SCHEMA_COLUMN=REGION_NAME, TRIM=false}, {SCHEMA_COLUMN=COUNTRY, TRIM=false}, {SCHEMA_COLUMN=STATE, TRIM=false}, {SCHEMA_COLUMN=CITY, TRIM=false}]
No null values	false
Support NLS	false
Label format	TABLE
Hint format	UNIQUE_NAME <_COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for REGIONS:

Column	Key	Туре	Length	Precision	Nullable	Comment
REGION_ID	false	BigDecimal	38		true	
REGION_NAME	false	String	26		true	
COUNTRY	false	String	26		true	
STATE	false	String	26		true	
CITY	false	String	26		true	

Original Function Parameters: Component tOracleOutput

UNIQUE NAME	tDBOutput_1	INPUT(S)	tAggregateRow_2
LABEL	TABLE	OUTPUT(S)	none

	component i didinetero:			
Properties	Values			
Database	tOracleOutput			
Unique Name	tDBOutput_1			
Component Name	tOracleOutput			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/Oracle			

Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tOracleOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244
Use an existing connection	false
Component List	
Connection Type	ORACLE_SERVICE_NAME
DB Version	ORACLE_18
URL	"10.34.47.244"
Host	"10.34.47.244"

г

Port	"1521"		
Database Driver	ORACLE_SERVICE_NAME		
Database	"talend.34.47.244"		
Local Service Name	"talend.34.47.244"		
Oracle schema	"DEMO_USER"		
Username	"demo_user"		
Password	*****		
Table	"PRODUCTS_REPORT"		
Action on table	NONE		
Action on data	INSERT		
REPOSITORY_ALLOW_AUTO_S\	MITTEH		
Schema	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244 - PRODUCTS_REPORT		
Reject Schema	Built-In		
Specify a data source alias	false		
Data source alias			
Die on error	false		
Mapping	oracle_id		
URL	"jdbc:oracle:oci:/@talend"		
Additional JDBC Parameters	111		
Use alternate schema	false		
Schema	пн		
Encoding	"ISO-8859-15"		

Commit every	10000
Additional columns	
Use field options	false
Field options	[{SCHEMA_COLUMN=PRODUCT_NAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=TOTAL_PRICE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=REGION_NAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Use Hint Options	false
Hint Options	0
Convert columns and table to uppercase	false
Write BLOB values from a different DB	false
Debug query mode	false
Use Batch Size	true
Use Batch	false
Batch Size	10000
Support null in "SQL WHERE" statement	false
Use Timestamp for Date type	true
Trim when the updating or deleting key is of char DB type	true
Support NLS	false
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for PRODUCTS_REPORT:

Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_NAME	false	String	128		true	
TOTAL_PRICE	false	BigDecimal	38		true	
REGION_NAME	false	String	128		true	

Original Function Parameters: Component tFilterRow

T T	UNIQUE NAME	tFilterRow_19	INPUT(S)	tMap_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	tAggregateRow_2

Component Parameters.				
Properties	Values			
Unique Name	tFilterRow_19			
Component Name	tFilterRow			
Version	0.102 (ALPHA)			
Family	Processing			
Startable	false			
SUBTREE_START	false			
END_OF_FLOW	false			

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFilterRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_S\	MITEH
Schema	Built-In
Schema	Built-In
Schema	Built-In
Logical operator used to combine conditions	&&
Conditions	[{INPUT_COLUMN=PRODUCT_NAME, FUNCTION=\$source == null? false : \$source.toLowerCase().compareTo(\$target) \$operator 0, OPERATOR===, RVALUE="laptop"}]
Use advanced mode	false
Advanced	// code sample : use input_row to define the condition. // input_row.columnName1.equals("foo") !(input_row.columnName2.equals("bar")) // replace the following expression by your own filter condition input_row.columnName1.equals(input_row.columnName2)
Label format	UNIQUE_NAME

Hint format	_UNIQUE_NAME _COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for output2:

ochema for outpu	<u>. </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_NAME	false	String	128		true	
TOTAL_PRICE	false	Integer	38		true	
REGION_NAME	false	String	26		true	

Original Function Parameters: Component tMap

 UNIQUE			tDBInput_1
NAME	tMap_1	INPUT(S)	, tDBInput_2, tDBInput_3
LABEL	UNIQUE_NAME	OUTPUT(S)	tFilterRow_19

Properties	Values
tStatCatcher Statistics	false
Mapping links display as:	AUTO

Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Туре	Expression	isNullable
PRODUCT_ID	BigDecimal		true
PRODUCT_NAME	String		true
PRICE	BigDecimal		true
CATEGORY	String		true
MANUFACTURER	String		true
QUANTITY_AVAILABLE	BigDecimal		true

Constraint Table Entries(row1):

Name Type	Expression	isNullable	
-----------	------------	------------	--

Mapper table Properties (row2):

mapper table i roperties (rowz).			
Properties	Values		
Name	row2		
Matching-mode	UNIQUE_MATCH		
isMinimized	false		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(row2):

Name	Туре	Expression	isNullable
SALE_ID	BigDecimal		true
PRODUCT_ID	BigDecimal	row1.PRODUCT_ID	true
REGION_ID	BigDecimal		true
SALE_DATE	java.util.Date		true
QUANTITY_SOLD	BigDecimal		true
TOTAL_PRICE	Integer		true
CUSTOMER_ID	BigDecimal		true
SALESPERSON_ID	BigDecimal		true

Constraint Table Entries(row2):

Name	Туре	Expression	isNullable	

Mapper table Properties (row3):

mapper table i roperties (romo).			
Properties	Values		
Name	row3		
Matching-mode	UNIQUE_MATCH		
isMinimized	false		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(row3):

Name	Туре	Expression	isNullable
REGION_ID	BigDecimal	row2.REGION_ID	true
REGION_NAME	String		true
COUNTRY	String		true
STATE	String		true
CITY	String		true

Constraint Table Entries (row3):

Name Type	Expression isNullable
-----------	-----------------------

Mapper table for tMap_1 (output): Mapper table Properties(out1):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Туре	Expression	isNullable
PRODUCT_ID	BigDecimal	row1.PRODUCT_ID	true
PRODUCT_NAME	String	row1.PRODUCT_NAME	true
PRICE	BigDecimal	row1.PRICE	true
SALE_ID	BigDecimal	row2.SALE_ID	true
REGION_ID	BigDecimal	row2.REGION_ID	true
TOTAL_PRICE	Integer	row2.TOTAL_PRICE	true
REGION_NAME	String	row3.REGION_NAME	true

Constraint Table Entries(out1):

Name Type Expre	ssion isNullable
-----------------	------------------

Mapper table Properties(output2):

mapper table Properties (outputz):		
Values		
output2		
false		
null		

Metadata Table Entries(output2):

Name	Туре	Expression	isNullable
PRODUCT_NAME	String	row1.PRODUCT_NAME	true
TOTAL_PRICE	Integer	row2.TOTAL_PRICE	true
REGION_NAME	String	row3.REGION_NAME	true

Constraint Table Entries(output2):

|--|

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

mapper table i reperties var j.		
Properties	Values	
Name	Var	
Matching-mode		
isMinimized	true	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries(Var):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

Constraint Table Entries(Var):

Name	Туре	Expression	isNullable