

# Generated by Talend Real-time Big Data Platform

Project Name	talend_prem	GENERATION DATE	Feb 27, 2024, 10:18:56 PM
AUTHOR	developer, developer	Talend Real-time VERSION	8.0.1.20240118_0425-patch

### **Summary**

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

### **Project Description**


Properties	Values
Name	talend_prem
Language	java

|--|

## **Description**

Properties	Values
Name	errorHandling
Author	developer, developer
Version	0.1
Purpose	
Status	
Description	
Creation	Feb 27, 2024, 9:30:05 PM
Modification	Feb 27, 2024, 10:06:08 PM

### **Preview Picture**

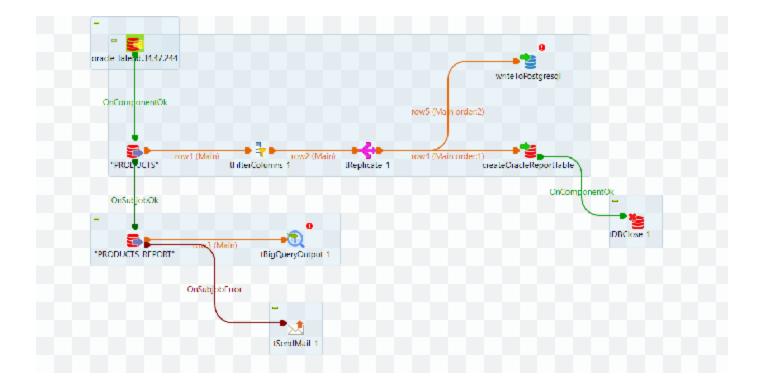

### **Settings**

#### **Extra settings**

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

#### Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

### **Context List**

#### ContextDefault

Name	Prompt	Need Prompt?	Туре	Value	Source
------	--------	--------------	------	-------	--------

## **Component List**

Component Name	Component Type
tBigQueryOutput_1	tBigQueryOutput
tDBClose_1	tOracleClose

tDBConnection_1	tOracleConnection
tDBInput_1	tOracleInput
tDBInput_2	tOracleInput
tDBOutput_1	tOracleOutput
tDBOutput_2	tPostgresqlOutput
tFilterColumns_1	tFilterColumns
tReplicate_1	tReplicate
tSendMail_1	tSendMail

### **Components Description**

#### Component tBigQueryOutput

1	UNIQUE NAME	tBigQueryOutput_1	INPUT(S)	tDBInput_2
	LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component i diameters.		
Properties	Values	
Unique Name	tBigQueryOutput_1	
Component Name	tBigQueryOutput	
Version	0.102 (ALPHA)	
Family	Big Data/Google BigQuery	

Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tBigQueryOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Mapping	bigquery_id
Property Type	Built-In
Local filename	"C:/Users/presales/workspace/demoWorkspace/biquery_bulk.txt"
Append	false
REPOSITORY_ALLOW_AUTO_SV	VITICH
Schema	Built-In
Authentication mode	SERVICEACCOUNT

OAuth Access Token	**
Service account credentials file	""
Client Id	""
Client Secret	**
Authorization Code	""
Project ID	""
Dataset	пп
Table	""
Create the table if it doesn't exist	true
Action on data	TRUNCATE
Bulk file already exists	false
Credential type	GS_SERVICE_ACCOUNT
Service account key	"C:/Users/presales/workspace/demoWorkspace/key.json"
OAuth Access Token	**
Bucket	""
File	"gs://"
Header	0
Die on error	false
Use a custom endpoint	false
Google Storage Private API URL	"https://storage.googleapis.com"
Google BigQuery Private API URL	"https://bigquery.googleapis.com"
token properties File Name	"C:/Users/presales/workspace/demoWorkspace/token.properties"

Use 12-hour format for dynamic columns	false
Set the field delimiter	true
FIELD_DELIMITER	","
!!!ROWSEPARATOR.NAME!!!	"\n"
Field Separator	","
Drop table if exists	false
Escape char	"\\"
!!!TEXT_ENCLOSURE.NAME!!!	n/nn
Use custom null marker	false
CUSTOM_NULL_MARKER	
Create directory if not exists	true
Custom the flush buffer size	false
Row number	1
!!!RECORDS_CONTAIN_NULL_VA	Atruke.NAME!!!
Check disk space	false
Encoding	"ISO-8859-15"
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

|--|--|

#### **Schema for PRODUCTS\_REPORT:**

Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_NAME	false	String	128		true	
TOTAL_PRICE	false	BigDecimal	38		true	
REGION_NAME	false	String	128		true	

# Original Function Parameters: Component tOracleClose

UNIQUE NAME	tDBClose_1	INPUT(S)	tDBOutput_1
LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component Farameters.		
Properties	Values	
Database	tOracleClose	
Unique Name	tDBClose_1	
Component Name	tOracleClose	
Version	0.102 (ALPHA)	
Family	Databases/DB Specifics/Oracle	
Start	false	
Startable	true	
SUBTREE_START	true	
END_OF_FLOW	true	

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tOracleClose
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Component List	tDBConnection_1
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

# Original Function Parameters: Component tOracleConnection

and the second second	UNIQUE NAME	tDBConnection_1	INPUT(S)	none	
	LABEL	oracle_talend.34.47.244	OUTPUT(S)	tDBInput_1	

<b>Component Parameters:</b>	
Properties	Values
Database	tOracleConnection
Unique Name	tDBConnection_1
Component Name	tOracleConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/Oracle ELT/Connections
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tOracleConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244
Connection Type	ORACLE_SERVICE_NAME
DB Version	ORACLE_18
URL	"10.34.47.244"
Use tns file	false
TNS File	""
Select a DB Connection in Tns File	
Host	"10.34.47.244"
Database Driver	ORACLE_SERVICE_NAME
Port	"1521"
Database	"talend.34.47.244"
Local Service Name	"talend.34.47.244"
Schema	"DEMO_USER"
Username	"demo_user"
Password	*****
Use SSL	false
TrustStore file	11.11
TrustStore password	**
Need Client authentication	false

KeyStore file	""
KeyStore password	**
Disable CBC protection	true
Encoding	"ISO-8859-15"
Additional JDBC Parameters	
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	
URL	"jdbc:oracle:thin:USER/MDP@server"
Auto Commit	false
Support NLS	false
Label format	oracle_talend.34.47.244
Hint format	<b>UNIQUE_NAME</b> <_COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Original Function Parameters: Component tOracleInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tDBConnection_1
	LABEL	TABLE		tFilterColumns_1 , tDBInput_2

Database  IOracleInput  IDBInput_1  Component Name  IOracleInput  OracleInput  OracleInput  OracleInput  OracleInput  Jersion  0.102 (ALPHA)  Databases/DB Specifics/Oracle  Start  false  Start  false  Startable  true  SUBTREE_START  true  END_OF_FLOW  false  Activate  true  DUMMY  false  StatCatcher Statistics  false  Help  org.talend.help.tOracleInput  true  REPORT_PATH  UAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\lib\java	Component Parameters:				
Unique Name  tDBInput_1  tOracleInput  Version  0.102 (ALPHA)  Family  Databases/DB Specifics/Oracle  Start  false  Startable  true  SUBTREE_START  true  END_OF_FLOW  false  Activate  true  DUMMY  false  StatCatcher Statistics  false  Org.talend.help.tOracleInput  true  REPORT_PATH  UNIQUE ACTIVATE INDEX (STATION INSTITUTION INS	Properties	Values			
Component Name  IOracleInput  Jersion  0.102 (ALPHA)  Databases/DB Specifics/Oracle  Start  false  Startable  true  SUBTREE_START  true  END_OF_FLOW  false  Activate  true  DUMMY  false  StatCatcher Statistics  false  Jelp  org.talend.help.tOracleInput  true  REPORT_PATH  JAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\lib\java	Database	tOracleInput			
Version 0.102 (ALPHA)  Family Databases/DB Specifics/Oracle  Start false  Startable true  SUBTREE_START true  END_OF_FLOW false  Activate true  DUMMY false  StatCatcher Statistics false  Help org.talend.help.tOracleInput  True  REPORT_PATH  JAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\\iib\java	Unique Name	tDBInput_1			
Family Databases/DB Specifics/Oracle  Start false  Startable true  SUBTREE_START true  END_OF_FLOW false  Activate true  DUMMY false  StatCatcher Statistics false Help org.talend.help.tOracleInput  true  Update components true  REPORT_PATH  UAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\lib\java	Component Name	tOracleInput			
Startable true  SUBTREE_START true  END_OF_FLOW false  Activate true  DUMMY false  StatCatcher Statistics false  Help org.talend.help.tOracleInput  Jpdate components true  REPORT_PATH  JAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\lib\java	Version	0.102 (ALPHA)			
SUBTREE_START true  END_OF_FLOW false  Activate true  DUMMY false  StatCatcher Statistics false  Help org.talend.help.tOracleInput  True  REPORT_PATH  JAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\lib\java	Family	Databases/DB Specifics/Oracle			
SUBTREE_START true  END_OF_FLOW false  Activate true  DUMMY false  StatCatcher Statistics false  Help org.talend.help.tOracleInput  True  REPORT_PATH  JAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\lib\java	Start	false			
FND_OF_FLOW  false  Activate  true  DUMMY  false  StatCatcher Statistics  false  Help  org.talend.help.tOracleInput  Jpdate components  true  REPORT_PATH  JAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\lib\java	Startable	true			
Activate true  DUMMY false  StatCatcher Statistics false  Help org.talend.help.tOracleInput  Update components true  REPORT_PATH  UAVA_LIBRARY_PATH C:\Talend\8.0.1\studio\configuration\lib\java	SUBTREE_START	true			
StatCatcher Statistics false  Help org.talend.help.tOracleInput  Jpdate components true  REPORT_PATH  JAVA_LIBRARY_PATH C:\Talend\8.0.1\studio\configuration\lib\java	END_OF_FLOW	false			
StatCatcher Statistics false  Help org.talend.help.tOracleInput  Update components true  REPORT_PATH  UAVA_LIBRARY_PATH C:\Talend\8.0.1\studio\configuration\lib\java	Activate	true			
Help org.talend.help.tOracleInput  Jpdate components true  REPORT_PATH  JAVA_LIBRARY_PATH C:\Talend\8.0.1\studio\configuration\lib\java	DUMMY	false			
Jpdate components true  REPORT_PATH  JAVA_LIBRARY_PATH C:\Talend\8.0.1\studio\configuration\lib\java	tStatCatcher Statistics	false			
REPORT_PATH  JAVA_LIBRARY_PATH  C:\Talend\8.0.1\studio\configuration\lib\java	Help	org.talend.help.tOracleInput			
JAVA_LIBRARY_PATH C:\Talend\8.0.1\studio\configuration\lib\java	Update components	true			
	IREPORT_PATH				
Subjob color	JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java			
	Subjob color				

Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Use an existing connection	false
Component List	
Connection Type	ORACLE_SERVICE_NAME
DB Version	ORACLE_18
URL	"10.34.47.244"
Host	"10.34.47.244"
Database Driver	ORACLE_SERVICE_NAME
Port	"1521"
Database	"talend.34.47.244"
Local Service Name	"talend.34.47.244"
Oracle schema	"DEMO_USER"
Username	"demo_user"
Password	******
URL	"jdbc:oracle:oci:/@talend"
REPOSITORY_ALLOW_AUTO_S	WHICH
Schema	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244 - PRODUCTS
Table Name	"PRODUCTS"

Query Type	Built-In
Guess Schema	
Query	"SELECT DEMO_USER.PRODUCTS.PRODUCT_ID, DEMO_USER.PRODUCTS.PRODUCT_NAME, DEMO_USER.PRODUCTS.PRICE, DEMO_USER.PRODUCTS.CATEGORY, DEMO_USER.PRODUCTS.MANUFACTURER, DEMO_USER.PRODUCTS.QUANTITY_AVAILABLE FROM DEMO_USER.PRODUCTS"
Specify a data source alias	false
Data source alias	пп
Mapping	oracle_id
Additional JDBC Parameters	""
Convert XMLType To Java Type.	false
CONVERT_XMLTYPE	0
Encoding	"ISO-8859-15"
Use fetch size	false
Fetch size	1000
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=PRODUCT_ID, TRIM=false}, {SCHEMA_COLUMN=PRODUCT_NAME, TRIM=false}, {SCHEMA_COLUMN=PRICE, TRIM=false}, {SCHEMA_COLUMN=CATEGORY, TRIM=false}, {SCHEMA_COLUMN=MANUFACTURER, TRIM=false}, {SCHEMA_COLUMN=QUANTITY_AVAILABLE, TRIM=false}]
No null values	false
Support NLS	false
Label format	TABLE
Hint format	<b>_UNIQUE_NAME</b> <_COMMENT
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

#### **Schema for PRODUCTS:**

Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_ID	false	BigDecimal	38		true	
PRODUCT_NAME	false	String	128		true	
PRICE	false	BigDecimal	38		true	
CATEGORY	false	String	26		true	
MANUFACTURER	false	String	26		true	
QUANTITY_AVAILABLE	false	BigDecimal	38		true	

# Original Function Parameters: Component tOracleInput

<b>5</b>	UNIQUE NAME	tDBInput_2	INPUT(S)	tDBInput_1			
	LABEL	TABLE	OUTPUT(S)	tBigQueryOutput_1 , tSendMail_1			

Properties	Values
Database	tOracleInput
Unique Name	tDBInput_2

Component Name	tOracleInput			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/Oracle			
Start	false			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	false			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			
Help	org.talend.help.tOracleInput			
Update components	true			
IREPORT_PATH				
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java			
Subjob color				
Title color				
Enable parallel execution	false			
Number of parallel executions	2			
PARALLELIZE_KEEP_EMPTY	false			
Property Type	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244			
Use an existing connection	false			
Component List				

Connection Type	ORACLE_SERVICE_NAME			
DB Version	ORACLE_18			
URL	"10.34.47.244"			
Host	"10.34.47.244"			
Database Driver	ORACLE_SERVICE_NAME			
Port	"1521"			
Database	"talend.34.47.244"			
Local Service Name	"talend.34.47.244"			
Oracle schema	"DEMO_USER"			
Username	"demo_user"			
Password	******			
URL	"jdbc:oracle:oci:/@talend"			
REPOSITORY_ALLOW_AUTO_S\	MHTEH			
Schema	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244 - PRODUCTS_REPORT			
Table Name	"PRODUCTS_REPORT"			
Query Type	Built-In			
Guess Schema	""			
Query	"SELECT DEMO_USER.PRODUCTS_REPORT.PRODUCT_NAME, DEMO_USER.PRODUCTS_REPORT.TOTAL_PRICE, DEMO_USER.PRODUCTS_REPORT.REGION_NAME FROM DEMO_USER.PRODUCTS_REPORT"			
Specify a data source alias	false			
Data source alias	111			
Mapping	oracle_id			

Additional JDBC Parameters	nn
Convert XMLType To Java Type.	false
CONVERT_XMLTYPE	
Encoding	"ISO-8859-15"
Use fetch size	false
Fetch size	1000
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=PRODUCT_NAME, TRIM=false}, {SCHEMA_COLUMN=TOTAL_PRICE, TRIM=false}, {SCHEMA_COLUMN=REGION_NAME, TRIM=false}]
No null values	false
Support NLS	false
Label format	TABLE
Hint format	<b>UNIQUE_NAME</b> <brcomment< td=""></brcomment<>
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for PRODUCTS\_REPORT:** 

	7011011111 101 1 1 1 1 0 0 0 1 0 <u>1 1 1 1 </u>							
Column	Key	Туре	Length	Precision	Nullable	Comment		
PRODUCT_NAME	false	String	128		true			
TOTAL_PRICE	false	BigDecimal	38		true			

REGION_NAME	false	String	128	true	

# Original Function Parameters: Component tOracleOutput

UNIQUE NAME	tDBOutput_1	INPUT(S)	tReplicate_1
LABEL createOracleReportTal		OUTPUT(S)	tDBClose_1

Component Parameters:		
Properties	Values	
Database	tOracleOutput	
Unique Name	tDBOutput_1	
Component Name	tOracleOutput	
Version	0.102 (ALPHA)	
Family	Databases/DB Specifics/Oracle	
Startable	false	
SUBTREE_START	false	
END_OF_FLOW	true	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tOracleOutput	
Update components	true	
IREPORT_PATH		

JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	repository: DB (ORACLE_SERVICE_NAME):oracle_talend_34_47_244
Use an existing connection	false
Component List	
Connection Type	ORACLE_SERVICE_NAME
DB Version	ORACLE_18
URL	"10.34.47.244"
Host	"10.34.47.244"
Port	"1521"
Database Driver	ORACLE_SERVICE_NAME
Database	"talend.34.47.244"
Local Service Name	"talend.34.47.244"
Oracle schema	"DEMO_USER"
Username	"demo_user"
Password	*****
Table	"product_prices"
Action on table	DROP_IF_EXISTS_AND_CREATE

Action on data	INSERT
REPOSITORY_ALLOW_AUTO_SV	ALICH
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	
Die on error	true
Mapping	oracle_id
URL	"jdbc:oracle:oci:/@talend"
Additional JDBC Parameters	
Use alternate schema	false
Schema	<b>""</b>
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	
Use field options	false
Field options	[{SCHEMA_COLUMN=PRODUCT_NAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRICE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Use Hint Options	false
Hint Options	
Convert columns and table to uppercase	false
Write BLOB values from a different DB	false

Debug query mode	false
Use Batch Size	true
Use Batch	false
Batch Size	10000
Support null in "SQL WHERE" statement	false
Use Timestamp for Date type	true
Trim when the updating or deleting key is of char DB type	true
Support NLS	false
Label format	createOracleReportTable
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput\_1 :

	<u> </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_NAME	false	String	128		true	
PRICE	false	BigDecimal	38		true	

# Original Function Parameters: Component tPostgresqlOutput

	UNIQUE NAME	tDBOutput_2	INPUT(S)	tReplicate_1	
	LABEL	writeToPostgresql	OUTPUT(S)	none	

Component Parameters:			
Properties	Values		
Database	tPostgresqlOutput		
Unique Name	tDBOutput_2		
Component Name	tPostgresqlOutput		
Version	0.102 (ALPHA)		
Family	Databases/DB Specifics/PostgreSQL		
Startable	false		
SUBTREE_START	false		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tPostgresqlOutput		
Update components	true		
IREPORT_PATH			
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java		
Subjob color			
Title color			
Enable parallel execution	false		

Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Use an existing connection	false
Component List	
DB Version	V9_X
Host	""
Port	"5432"
Database	""
Database Driver	PostgreSQL
Schema	""
Username	""
Password	**
Table	""
Action on table	NONE
Action on data	INSERT
REPOSITORY_ALLOW_AUTO_SV	ALTIEH
Schema	Built-In
Reject Schema	Built-In
Use spatial options	false
Create Spatial index	false
Create geometry columns reference	false

	The state of the s
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	postgres_id
Use alternate schema	false
Schema	""
Additional JDBC Parameters	111
Use save point	false
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	
Use field options	false
Field options	[{SCHEMA_COLUMN=PRODUCT_NAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRICE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Debug query mode	false
Support null in "SQL WHERE" statement	false
Convert columns and table to lowercase	false
Use Batch Size	true
Batch Size	10000
Label format	writeToPostgresql
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput\_2:

	<u> </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_NAME	false	String	128		true	
PRICE	false	BigDecimal	38		true	

## Original Function Parameters: Component tFilterColumns

UNIQUE NAME	tFilterColumns_1	INPUT(S)	tDBInput_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tReplicate_1

Properties	Values			
Unique Name	tFilterColumns_1			
Component Name	tFilterColumns			
Version	0.101 (ALPHA)			
Family	Processing			
Startable	false			
SUBTREE_START	false			
END_OF_FLOW	false			

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFilterColumns
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SV	ALICH
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tFilterColumns\_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_NAME	false	String	128		true	
PRICE	false	BigDecimal	38		true	

# Original Function Parameters: Component tReplicate

4	UNIQUE NAME	tReplicate_1	INPUT(S)	tFilterColumns_1
				tDBOutput_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	, tDBOutput_2

Component Farameters.			
Properties	Values		
Unique Name	tReplicate_1		
Component Name	tReplicate		
Version	0.101 (ALPHA)		
Family	Orchestration		
Startable	false		
SUBTREE_START	false		
END_OF_FLOW	false		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tReplicate		
Update components	true		

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SV	MHTEH
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tReplicate\_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
PRODUCT_NAME	false	String	128		true	
PRICE	false	BigDecimal	38		true	

## Original Function Parameters: Component tSendMail

_	UNIQUE NAME	tSendMail_1	INPUT(S)	tDBInput_2	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:			
Properties	Values		
Unique Name	tSendMail_1		
Component Name	tSendMail		
Version	0.101 (ALPHA)		
Family	Internet		
Start	false		
Startable	true		
SUBTREE_START	true		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tSendMail		
Update components	true		
IREPORT_PATH			
JAVA_LIBRARY_PATH	C:\Talend\8.0.1\studio\configuration\lib\java		
Subjob color			
Title color			
Enable parallel execution	false		

Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
То	"receiver@example.com"
From	"send@example.com"
Show sender's name?	false
Sendername	"sender"
Сс	"carbon@example.com"
Всс	"blindcarbon@example.com"
Subject	"Talend Open Studio notification"
Message	"Hello"
Die if the attachment file doesn't exist.	true
Attachments	0
Other headers	0
SMTP host	"smtp.provider.com"
SMTP port	25
SSL Support	false
STARTTLS Support	false
Importance	Normal
Authentication mode	BASIC
Username	"username"
Password	*****
OAuth Access Token	******

Die on error	true
MIME subtype from the 'text' MIME type	plain
charset used for encoding message	"ISO-8859-15"
Set localhost	false
Localhost	"localhost"
Use two line authentication for OAuth2	false
Custom properties	
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for tSendMail\_1 :

### **Original Function Parameters:**