

UNIVERSITY OF WAH(UOW)
DEPARTMENT OF COMPUTER
SCIENCE



Lab Task # 07

COURSE: Computer Networks Lab_241L

SUBMITTED TO: Mr. Hassan Shafaqat

SUBMITTED BY: Muhammad Talha_CS.3ndB

Registration NO: UW-24-CS-BS-101

Task

Adding routes on screen



Adding switches and PC's on screen




Arranging in order




Connection two routers together



Connecting routers to switches



Connecting to switches to PC's

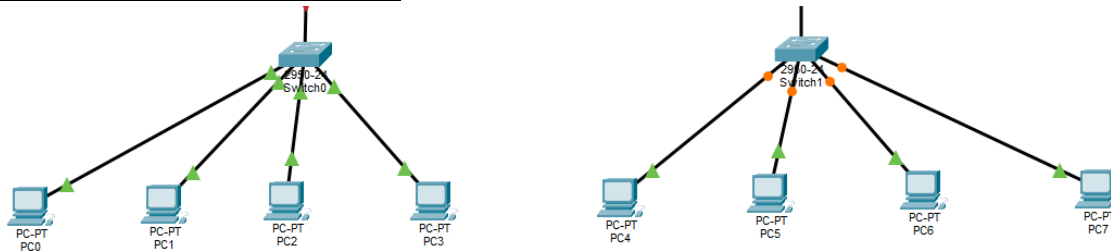

Giving address to routers

Route 1:

FastEthernet0/0

Port Status ☒ On

Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 00D0.58E4.3001

IP Configuration

IPv4 Address 192.168.101.1

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Route 2:

FastEthernet0/0

Port Status ☒ On

Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0009.7C57.BD01

IP Configuration

IPv4 Address 192.168.101.2

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Now Giving Address to Switches Side 0/2:

Switch 1:

FastEthernet0/1

Port Status ☒ On

Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 00D0.58E4.3002

IP Configuration

IPv4 Address 192.168.102.1

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Switch 2:

FastEthernet0/1	
Port Status	☒ On
Link Speed	☒ 100 Mbps ☐ 10 Mbps ☒ Auto
Duplex	☐ Half Duplex ☒ Full Duplex ☒ Auto
MAC Address	0009.7C57.BD02
IP Configuration	
IPv4 Address	192.168.102.2
Subnet Mask	255.255.255.0
Tx Ring Limit	10

Now giving IP address and Gateways to all PCs

PC 1:

IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.103.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.102.1
DNS Server	0.0.0.0

PC 2:

IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.103.2
Subnet Mask	255.255.255.0
Default Gateway	192.168.102.1
DNS Server	0.0.0.0

PC 3:

IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.103.3
Subnet Mask	255.255.255.0
Default Gateway	192.168.102.1
DNS Server	0.0.0.0

PC 4:

IPv4 Address	192.168.103.4
Subnet Mask	255.255.255.0
Default Gateway	192.168.102.1

PC 5:

IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.104.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.102.1
DNS Server	0.0.0.0

PC 6:

IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.104.2
Subnet Mask	255.255.255.0
Default Gateway	192.168.102.1
DNS Server	0.0.0.0


PC 7:

IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.104.3
Subnet Mask	255.255.255.0
Default Gateway	192.168.102.1

PC 8:

IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.104.4
Subnet Mask	255.255.255.0
Default Gateway	192.168.102.1
DNS Server	0.0.0.0

Adding comments to PC's:

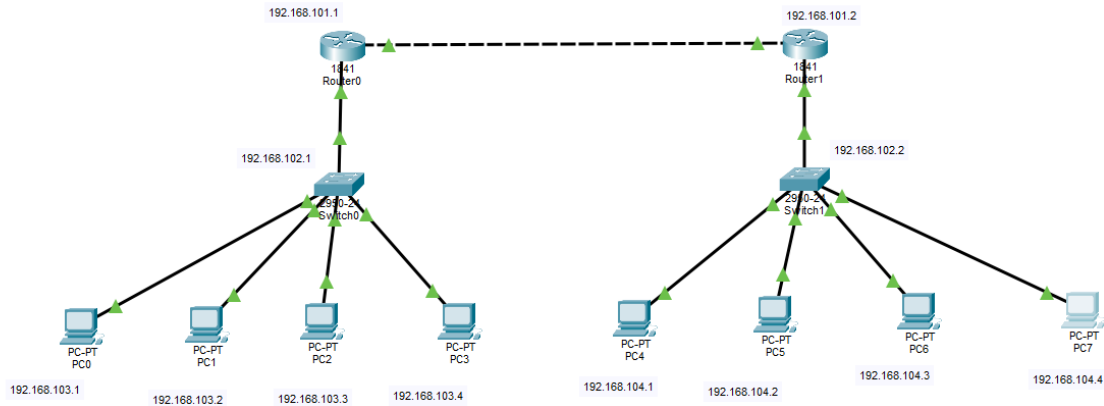

Apply static Route on Router 1:

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 192.168.104.0 255.255.255.0 192.168.101.2
Router(config)#
```

Apply static Route on Router 2:

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 192.168.103.0 255.255.255.0 192.168.101.1
Router(config)#
```

Messages sending:

Result	Source	Destination	Type	Status	Time (ms)	Loss (%)	Count	Details
Successful	PC1	PC2	ICMP	Green	0.000	N	0	(e... (delete)
Successful	PC3	PC2	ICMP	Yellow	0.000	N	1	(e... (delete)

Message sending through ping commands:

PC 1:

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 192.168.103.2 with 32 bytes of data:
```

```
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC 2:

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:

Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```



```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time=1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC 3:

```
Pinging 192.168.103.2 with 32 bytes of data:
```

```
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time=1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:

Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC 4:

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 192.168.103.2 with 32 bytes of data:
```

```
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC 5:

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:

Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time=1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC 6:

```
Pinging 192.168.103.2 with 32 bytes of data:
```

```
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time=1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:

Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC 7:

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 192.168.103.2 with 32 bytes of data:
```

```
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC 8:

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:

Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 192.168.103.2 with 32 bytes of data:

Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128
Reply from 192.168.103.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```



```
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time<1ms TTL=128
Reply from 192.168.103.3: bytes=32 time=24ms TTL=128
```

```
Ping statistics for 192.168.103.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 24ms, Average = 6ms
```

```
Pinging 192.168.103.4 with 32 bytes of data:
```

```
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time=1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
Reply from 192.168.103.4: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.103.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```