



EXECUTIVE PRESENTATION DECK

Inaya Network *Enterprise Revenue &* Node Reward Architecture

CONFIDENTIAL · PREPARED FOR INSTITUTIONAL REVIEW

INAYA NETWORK — DEPIN INFRASTRUCTURE & CUSTODY PROTOCOL

1 Enterprise Payment Settlement

The RevenueRouter serves as the protocol's financial automation engine. When an enterprise or retail customer purchases storage, payment is settled in USDT. Immediately after settlement, the RevenueRouter executes an immutable on-chain revenue distribution.

ALLOCATION	PURPOSE
39%	Node Reward Escrow
51%	Company Treasury
10%	Team & Platform Maintenance

Every allocation is executed atomically within the same blockchain transaction — there is no delay, intermediary custody, or manual reconciliation step between customer payment and on-chain distribution.

2 Escrow Creation

After distributing the revenue, the RevenueRouter automatically calls the **createEscrow()** function. CorporateEscrow then takes over custody and administration of the node-reward allocation without any manual approval step.

- **Receives** the 39% node allocation directly from the RevenueRouter
- **Creates** a unique, auditable escrow record on-chain
- **Locks** the funds for a fixed twelve-month vesting period
- **Associates** the escrow with the appropriate Storage Pool or Node Group through NodeRegistry

No manual approval is required — escrow creation, locking, and association all execute automatically as part of the same settlement flow.

3 Monthly Vesting Schedule

Rather than paying operators immediately, the escrow distributes rewards gradually — protecting protocol liquidity while giving node operators a predictable, recurring income stream.



WORKED EXAMPLE



4 Node Performance Validation

NodeRegistry continuously maintains the operational state of every storage node across the network. Each node's record includes:

01 Storage Capacity Registered capacity committed by the operator.	02 Reputation Score A running measure of reliability and compliance.
03 Historical Uptime Tracked availability over the node's lifetime.	04 Active Status Whether the node is currently online and eligible.
05 Stake Balance Collateral posted by the operator against the node.	06 Assigned Workloads Storage pools and data sets assigned to the node.

However, uptime alone is not sufficient to earn rewards — every node must also pass cryptographic Proof-of-Storage verification.


5 Proof of Storage Verification

At regular intervals, the protocol issues cryptographic storage challenges. Each node must prove that it still stores the assigned encrypted data. Only successful proofs are considered valid.

- **Merkle Proof validity** — the submitted proof correctly resolves against the expected root
- **Requested chunk availability** — the specific challenged data segment is retrievable
- **Challenge response deadline** — the proof is submitted within the required window
- **Storage integrity** — the returned data matches the original encrypted content
- **Successful cryptographic verification** — the proof passes final on-chain validation

6 Reward Authorization

When a node satisfies both operational requirements and Proof-of-Storage verification, NodeRegistry authorizes reward distribution through a single automated chain of custody.

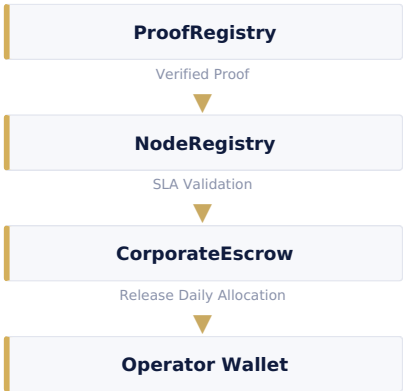

Nodes that fail verification simply do not receive that day's reward. Repeated failures reduce reputation and may eventually result in removal from the network.

7 Why This Architecture Matters

This design aligns incentives across every participant in the Inaya network.

- **Enterprises** pay in USDT through a familiar, predictable billing model
- **Node operators** earn predictable recurring income, but only by continuously proving storage
- **The protocol** preserves liquidity through escrowed vesting rather than immediate payouts
- **Investors** benefit from a capital-efficient model where revenue is allocated automatically and transparently on-chain

By combining atomic on-chain settlement, time-locked escrow vesting, and cryptographic proof of storage, Inaya Network ties operator compensation directly to verified network performance — a self-enforcing incentive structure that requires no manual oversight.

8 Swarm Reserve Emission Mechanics

Uptime-Gated SLA Framework. To enforce enterprise-grade availability and eliminate mercenary liquidity dumping, emissions from the 40% Swarm Reserve (12,000,000 \$INAYA) are strictly performance-gated and subject to a mandatory operational cliff.

12,000,000 \$INAYA

SWARM RESERVE · 40% OF 30,000,000 TOTAL SUPPLY

⚠ **The 3-Month Commitment Cliff** — nodes must maintain ≥90% average uptime for a minimum of 3 consecutive months to qualify for Swarm Reserve emissions.

⚙ **Controlled Monthly Cap** — distributions are hard-capped at 30 \$INAYA / month per node operator, ensuring a predictable, anti-inflationary emission decay schedule.

✓ **Cryptographic Verification** — uptime telemetry and Proof-of-Storage challenges are validated on-chain via the ProofRegistry before authorizing payouts.

TIER LEVEL	QUARTERLY UPTIME	MONTHLY CAP	SLA RATING
Tier 1 (Elite)	98.0% – 100%	30 \$INAYA	Enterprise-Grade
Tier 2 (Standard)	95.0% – 97.9%	20 \$INAYA	Commercial-Grade
Tier 3 (Baseline)	90.0% – 94.9%	10 \$INAYA	Minimum Viable
Ineligible	< 90.0%	0 \$INAYA	Slash / Reputation Penalty

Prevents speculative, short-term miners from claiming and dumping rewards; drives node operators toward enterprise-level Web2 reliability (98%+); and extends the runway of the Swarm Reserve pool across long-term growth phases.