

# Document AI - Invoice Parser

## Unstructured Data -> Structured Data

### Introduction

With the growth of digitalization in all sorts of industries, companies want to automate most of their manual work, as manual work is prone to errors and is time consuming. One such case is the manual entry of form-like documents for further tasks, for example reading an invoice and filling entries like invoice date, seller name, buyer name, etc manually. This created a need for an algorithm that can automate this task by just taking invoice pdf as an input and outputting a json file containing all the extracted fields from that invoice.

Supplier name: Examplewebshop.com

Recipient: Klipka  
Purchasing department  
Lübeckweg 2  
9723HE Groningen  
The Netherlands  
info@klipka.com

Payment method: Payment method:  
Paid with Paypal

Supplier contact information: Spijkerkade 3  
1021 JS Amsterdam  
The Netherlands  
Phone: 0203301924  
Email: info@examplewebshop.com  
Website: www.examplewebshop.com  
BIC: NL24RABO0110562482  
IBAN: NL441231  
VAT Number: NL453534420001

Weborder 100000734

Invoice #18800000  
Invoice date 21-12-2018

Count	SKU	Description	Price	VAT%	Net. amount	VAT	Total amount
76	SKU-21371	Example items	€ 0.59	21%	€ 37.06	€ 7.78	€ 44.84
24	SKU-10465	Replacement parts	€ 0.59	21%	€ 11.79	€ 2.48	€ 14.18
1		Shipping fee	€ 3.95	21%	€ 3.26	€ 0.69	€ 3.95
1		Transaction fee	€ 0.00	21%	€ 0.00	€ 0.00	€ 0.00

Invoice total, VAT total: Total netto amount € 53.02  
VAT 21% € 10.93  
Total including VAT € 62.95

Sample Output


## Methods

Several methods were tried and researched on, so as to compare the performance and accuracy of each approach in order to find the best approach.

### Method 1 : Easy OCR and spacy

#### Easy OCR :

Easy OCR is a python's OCR library used for text extraction from images, we used this library to convert our image into a text format. Firstly, the images were preprocessed (Grayscale, Gaussian Blur, Binary Thresholding). Then, the Easy OCR was used on the preprocessed images to extract the text. This extracted text was further used in the NER (Named Entity Recognition) model.


<b>DK SOFTWARES AND SERVICES</b> 887 SAHEED NAGAR BHUBANESWAR GSTIN NO: 21EFKPR08033F129 State: 21-Orissa GSTIN: 21EFKPR08033F129		Invoice No.: TAXI000368 Dated: 05/12/2022					
<b>Bill To :</b> TALLY SOLUTIONS PVT LTD-BANGALORE 23 & 24 AMR TECH PARK II HONGASANDRA HONGASANDRA MAIN ROAD BANGALORE GSTIN: 29AAACP7879D120 State: 29-Karnataka GSTIN: 29AAACP7879D120		Delivery Note No.: 000369 Dated: 05/12/2022 No. of Packs: Other Reference(s):					
<b>Ship To :</b> TALLY SOLUTIONS PVT LTD-BANGALORE 23 & 24 AMR TECH PARK II HONGASANDRA HONGASANDRA MAIN ROAD BANGALORE GSTIN: 29AAACP7879D120 BANGALORE 560088 Karnataka State: 29-Karnataka GSTIN: 29AAACP7879D120		Despatch Doc. No.: Dated: Despatched Through: Destination: BANGALORE-Karnat aka					
		Agent: Del. Inst: Payment Due Date: 05/12/2022					
Sr. No.	HSN Code	Particulars	Tax%	Qty	Rate	Disc%	Amount
1	998297	Reimbursement Expenses-Event Business Support Service	18.00	1 Nos	20435.00		20435.00
		IGST			18.00%		3,678.30
		Round Off					0.30
		Total		1 Nos			24,113.60
Amount(In words): Twenty Four Thousand One Hundred Thirteen INR Only							
<b>Account Details:</b> DK SOFTWARES AND SERVICES PUNJAB NATIONAL BANK A/C NO: 7576002100001168 (IFSC: PUNB0767600) BRANCH: KANTAPADA, CUTTACK (ODISHA)				 For, DK SOFTWARES AND SERVICES Authorised Signatory			

Easy OCR Output

---

## Spacy :

Spacy is a python's library used for NER (Named Entity Recognition). Spacy takes text as an input, tokenizes the text and then predicts some common fields like, PERSON, ORG, DATE, etc from that text.

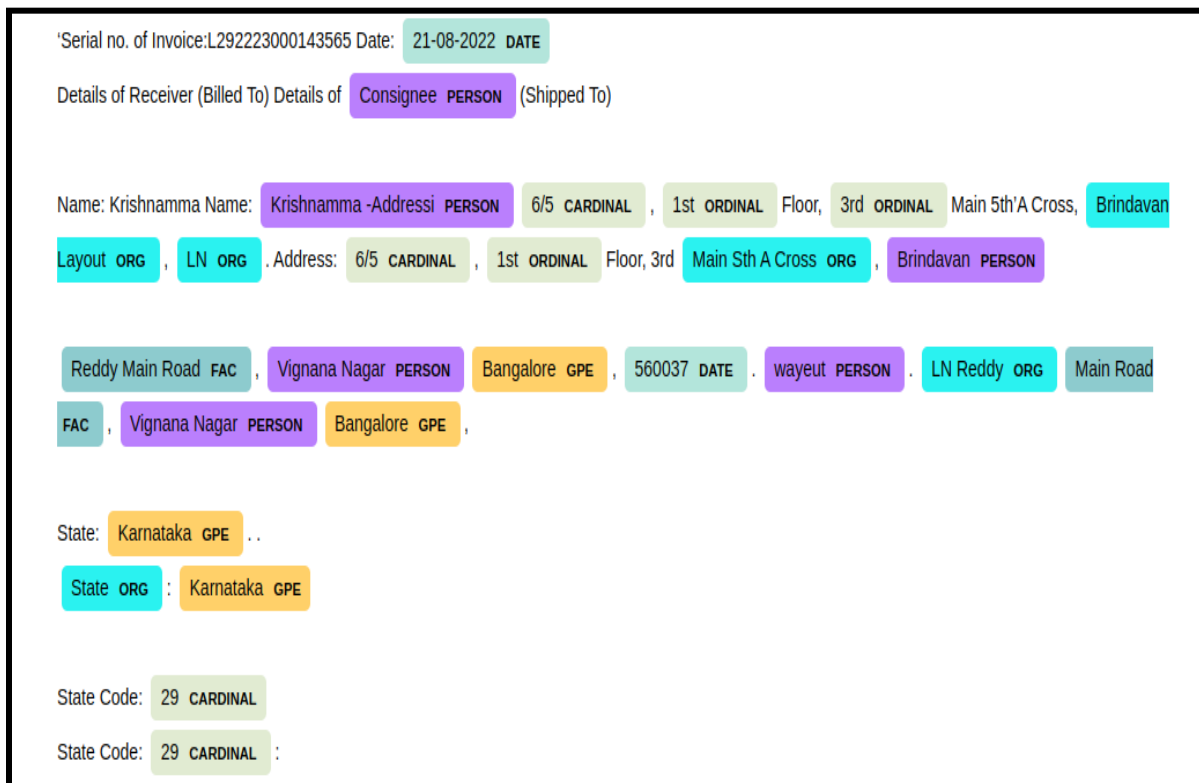


Spacy Output

Spacy has several pre-trained models to choose from like, small model, large model and the RoBERTa model. We chose the uncased models for small and large and compared the accuracy. Since the data in an invoice document is quite less, small model's accuracy came out to be slightly greater than that of the large model.

---

## Results :

We tried and tested this model on some invoices to check the efficiency of this approach, it worked fine on many invoices for the fields like invoice date, but was not that effective for other name fields.

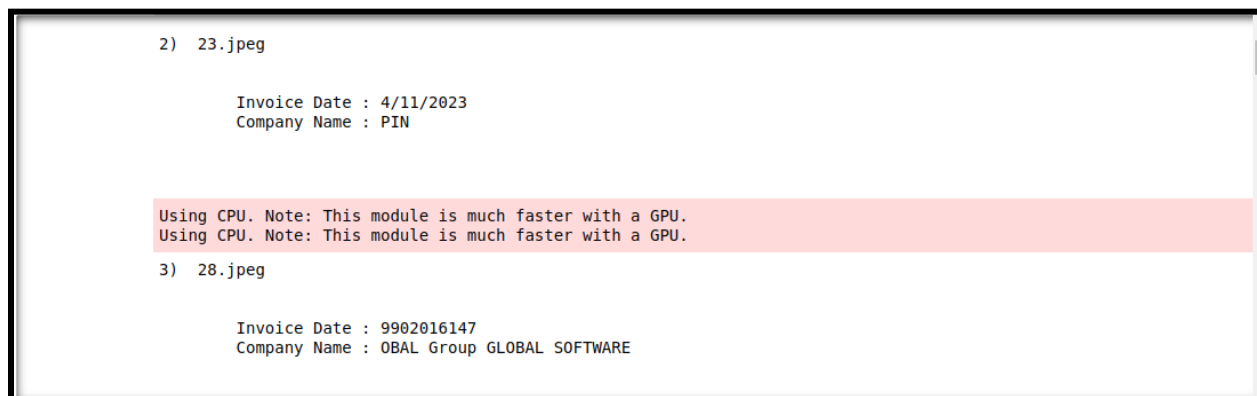

```
2) 23.jpeg

Invoice Date : 4/11/2023
Company Name : PIN

Using CPU. Note: This module is much faster with a GPU.
Using CPU. Note: This module is much faster with a GPU.

3) 28.jpeg

Invoice Date : 9902016147
Company Name : OBAL Group GLOBAL SOFTWARE
```

Spacy Inference

## Findings :

- Easy OCR is a library that works better with the GPU and is a bit slow on using the CPU alone. It took around 15 seconds to extract the text from each image.
- Spacy is used in NLP tasks and works better if the text is semantic and holds a meaning, whereas in our use case, text is in the form of key : value pairs. Due to this reason, this approach failed in many invoices.
- Spacy gave a good result for the date field, but failed drastically on name fields like buyer name, seller name, etc.
- This approach is a purely NLP solution and does not take the positions of text into account.

---

## Method 2 : Tesseract OCR

Tesseract OCR is Google's OCR engine and PyTesseract is the python's wrapper for this engine that can be used directly in our python code.

Tesseract OCR works similar to the Easy OCR, takes an image as an input and returns the output, but its output has a variety of fields and key information. We can extract the output in many forms like string, dictionary and dataframe. We extracted the text in the form of a dataframe. Output had various features like the text itself, bounding boxes, line number, word number, etc.

Out[75]:

	level	page_num	block_num	par_num	line_num	word_num	left	top	width	height	conf	text
4	5	1	1	1	1	1	654	125	44	26	90.456886	OK)
5	5	1	1	1	1	2	708	130	179	16	78.731796	SOFTWARES
6	5	1	1	1	1	3	896	125	67	26	78.731796	AND
7	5	1	1	1	1	4	974	130	140	16	95.575264	SERVICES
9	5	1	1	1	2	1	661	166	50	37	81.337814	684
...	...	...	...	...	...	...	...	...	...	...	...	...
127	5	1	9	1	3	1	142	1981	114	23	76.816223	BRANCH)
128	5	1	9	1	3	2	262	1981	158	26	66.789734	KANTAPADA)
130	5	1	9	1	4	1	138	2008	124	38	35.729332	CUTTACR)
131	5	1	9	1	4	2	271	2008	114	38	65.808868	(ODISHA)
135	5	1	10	1	1	1	111	43	1534	2071	95.000000	

86 rows × 12 columns

Tesseract Output

Now for testing this approach, we started with just a single field, InvoiceDate field. We pre processed this dataframe to extract all the rows having a datetime object in it.

- We first combined the text tokens extracted on the basis of block number and the distance between them.
- Then created n-grams for the combined texts.
- Used datetime parser to find fields having datetime objects in them.

---

Now that the fields having dates were extracted, it was required to add some neighbor information to train the model. For example if a date field has "invoice" written in its neighboring location, then it is surely the invoice date.

Firstly we took just a few neighbor fields like "invoice date", "date", "dated", "bill date" etc, and annotated them 1 or 0 based upon their presence in the top or left region of the concerned field.

Then this final dataset was given labeling as "isInvoiceDate" or "notInvoiceDate" manually. The final dataset had 36 rows and 19 columns.

Now different model fittings were tested on this dataset for comparing performance.

### Model 1 : Keras Sequential ANN Model

A simple ANN model was trained on this dataset for 100 epochs.


```
In [18]: model.summary()
```

```
Model: "sequential"
```

Layer (type)	Output Shape	Param #
dense (Dense)	(None, 64)	1216
dense_1 (Dense)	(None, 32)	2080
dense_2 (Dense)	(None, 1)	33

```
=====
Total params: 3,329
Trainable params: 3,329
Non-trainable params: 0
=====
```

Keras Model Summary

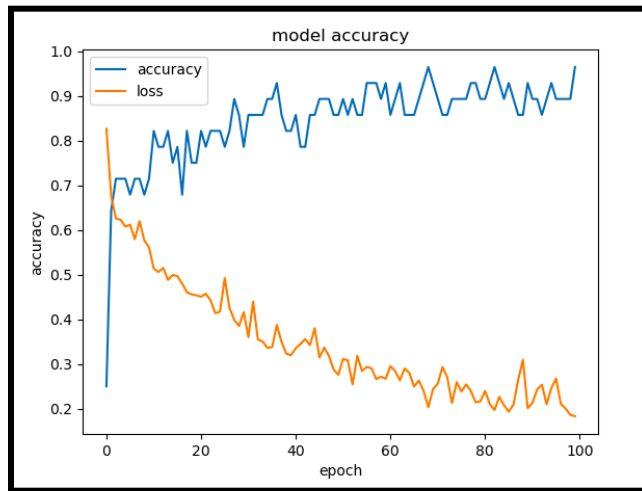


Keras Model Training

This model gave a testing accuracy of 87.5% and predicted 7 out of 8 testing images correctly. On increasing the dataset by 20 invoices and fine tuning the model, we were able to reach an accuracy of 88%

On testing the correlation between fields, we found out that neighbor fields were giving a really low correlation, so we changed neighbor extraction technique, and rather than taking its presence (1/0), we took its distance from the concerned field.

Finally the accuracy came out to be 93.55%

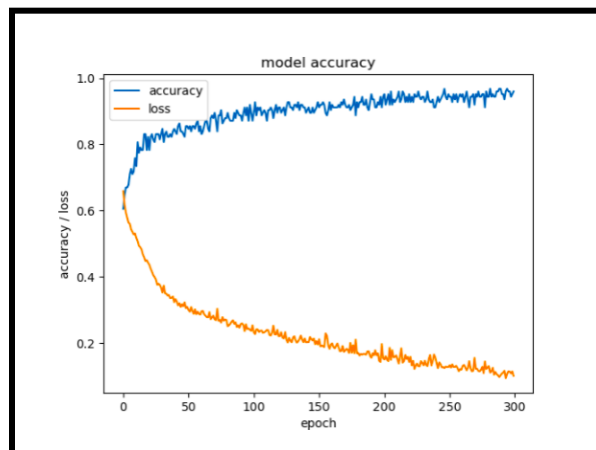

Keras Model Training

---

Now some performance benchmarks were performed on this model.

```
• Output was as follows

Max Time Taken : 7.416690826416016
Min Time Taken : 0.6528520584106445
Avg Time Taken : 3.2954273043938405

• A benchmark was prepared for monitoring CPU and RAM usage.

In [68]: inferenceTime, maxCPU, minCPU, maxMemory, minMemory = benchmark()
clear_output(wait=True)
print("TIME TAKEN : ", inferenceTime, "SEC")
print("MAX CPU : ", maxCPU, "%")
print("MAX MEMORY : ", maxMemory//1024, "MB")
print("MIN MEMORY : ", minMemory//1024, "MB")
TIME TAKEN : 5.411151170730591 SEC
MAX CPU : 9.36 %
MAX MEMORY : 750.0 MB
MIN MEMORY : 625.0 MB
```

## Keras Model Benchmark

### Model 2 : XGBOOST Model

XGBoost means extreme gradient boosting and it is an ensemble learning method that uses ensembles of decision trees to train the model. On applying the XGBoost model and comparing the accuracy with ANN model, we found that XGBoost was a clear cut winner in terms of accuracy. But the base model was still not generalizing good on the unseen data, so we performed some hyperparameter tuning using techniques like GridSearchCV but the generalization still remained bad. The problem was the low correlation between fields.


We tried adding more and more logical fields so as to improve correlation and hence the accuracy. We added a few context keywords like “invoiceDate” and used the distance of these keywords from the concerned field. Correlation improved but still it was not satisfactory. Now, rather than taking context keywords' distance, we took context keyword's X and Y positions for training, fine tuned the XGBoost model and tried to improve the accuracy.

Since the dataset was really small, too many context keywords reduced the correlation significantly, so on trying with just two keywords, we achieved an 89% accuracy with just the base model, i.e, without hyperparameter tuning.



---

Now, as we were using many columns for neighbor fields, there was a need to combine these multiple columns and encode them into a single column for training. So we tried some encoding techniques and finally achieved a correlation of ~30% and an accuracy of 82%.

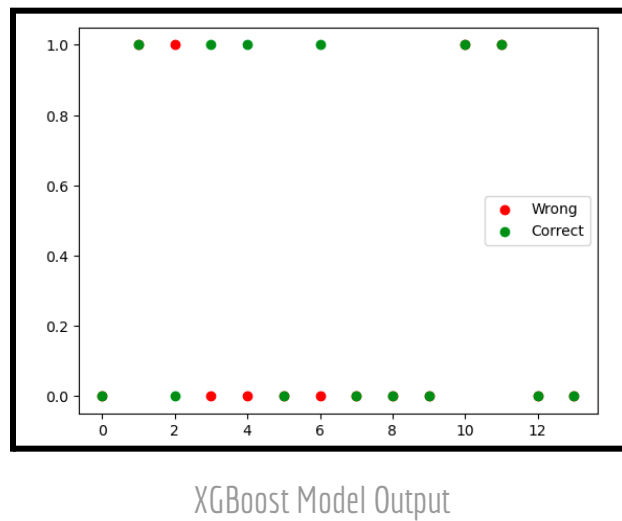

### Findings :


- One of the major problems with this approach was the OCR. Tesseract OCR was only 50% efficient in extracting the text correctly, since tesseraact OCR is better for semantic texts that hold a meaning.
- There was a need for a Zonal OCR technique which could read text in the form of zones.

---

## Method 3 : Clustering

Clustering is an unsupervised learning mechanism that divides the data points into several groups based upon some parameters. There are several clustering algorithms like K-Means, K-Nearest-Neighbours, etc. But, these algorithms are good for spherical clusters and when the number of clusters to be made are already known. Since in our use case, each invoice can be different and is not template based, the number of clusters can differ in each invoice, so these algorithms won't work for us.

We here used an algorithm called DBSCAN (Density Based Spatial Clustering For Applications With Noise). In this algorithm the number of clusters need not to be defined and just the data points and two hyperparameters namely epsilon( $\epsilon$ ) and minimum samples( $\text{min\_samples}$ ) have to be provided for the clustering job.

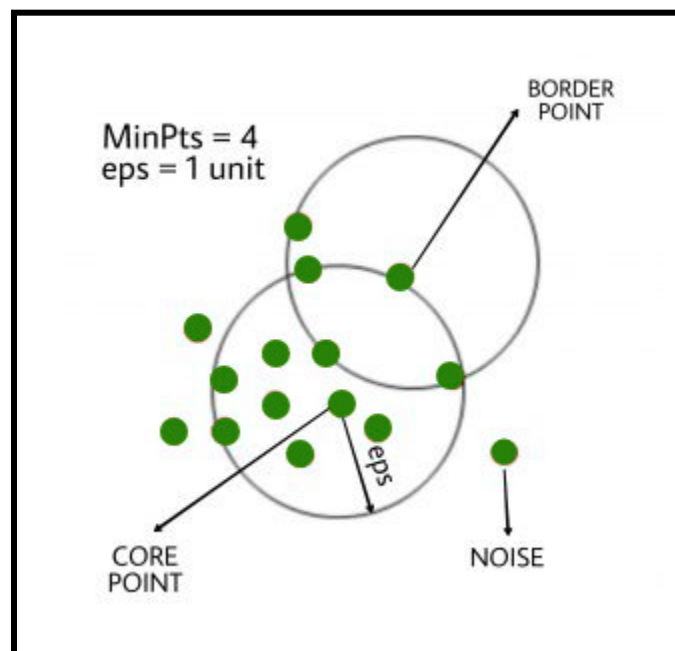

DBSCAN Algorithm

Eps : Epsilon defines the distance after which the data points are classified to be other clusters. In simple words, all the points within the eps radius of a point are considered to be the same cluster.

Min-Samples : Min-Samples defines the number of data points required in an Eps radius to be classified as a cluster. All the data points which fail this property are known as noise.


For using this algorithm, we pre processed the image so as to normalize the output by DBSCAN.

### Image Pre Processing :

It included :


- Cropping the images for just the relevant area containing text.

Example :

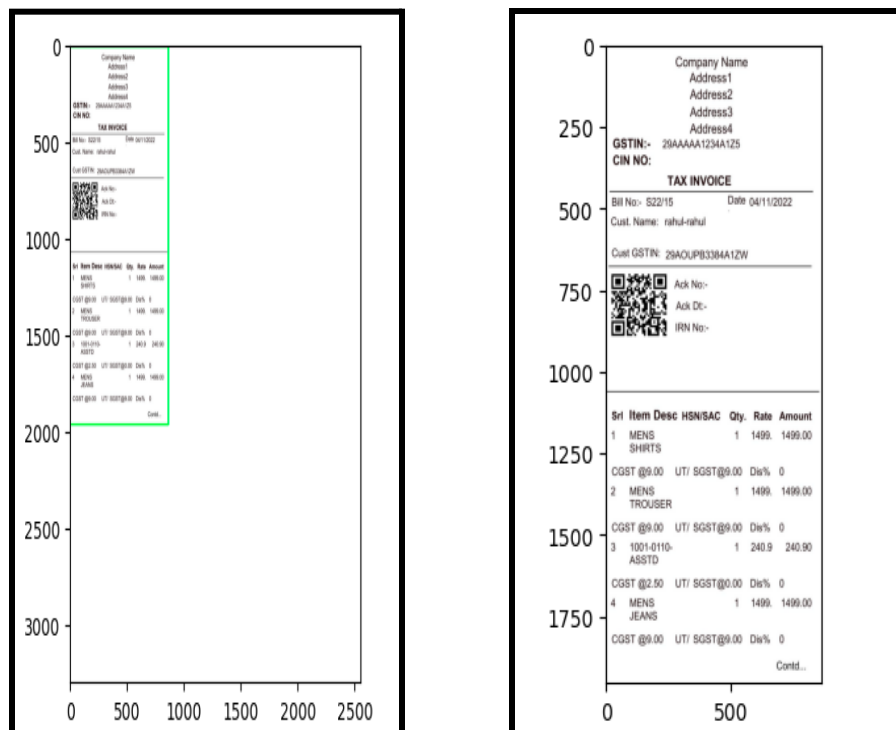


Before and After Cropping

- Converting images to a fixed size of 1000px X 1000px

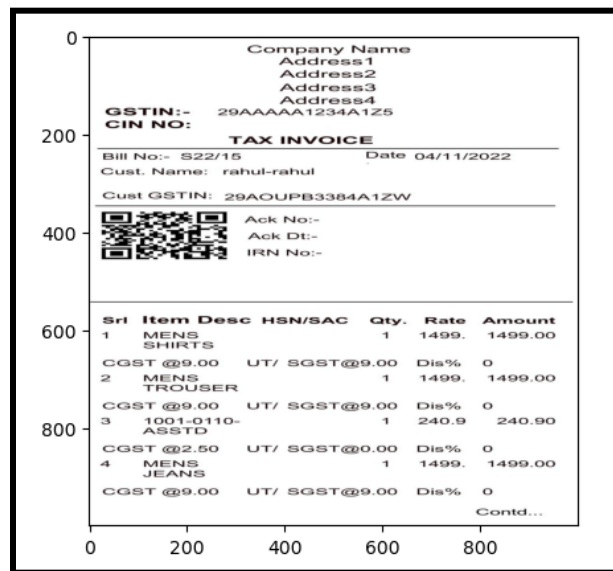

After Resizing to 1000x1000

- Converting images to grayscale and adding blur and binary thresholding to increase contrast.

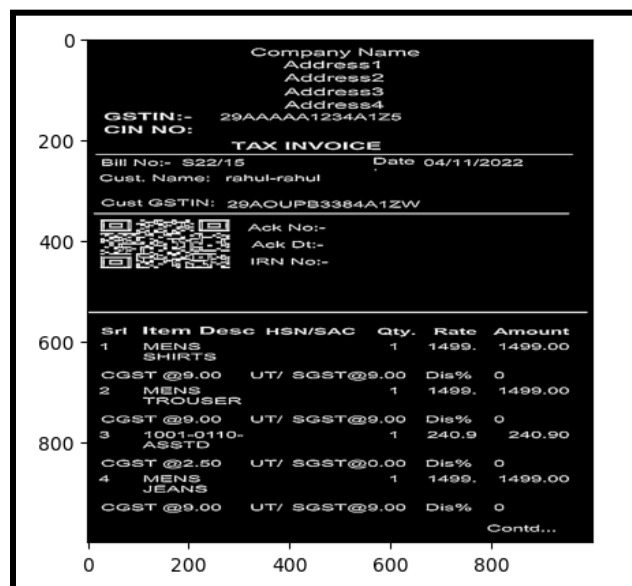

After applying Gray/Blur/Thresh


**Clustering :**

- These pre-processed images were passed through the tesseract OCR to extract all the text tokens from the image.
- The tesseract output was pre processed.
- DBSCAN clustering was applied with random parameters.

```
In [16]: clustering = DBSCAN(eps=0.09, min_samples=9).fit(XTrain)
```

## DBSCAN Implementation Using SKLEARN

- After this, the DBSCAN clusters were overlapped on the original image to visualize the results.

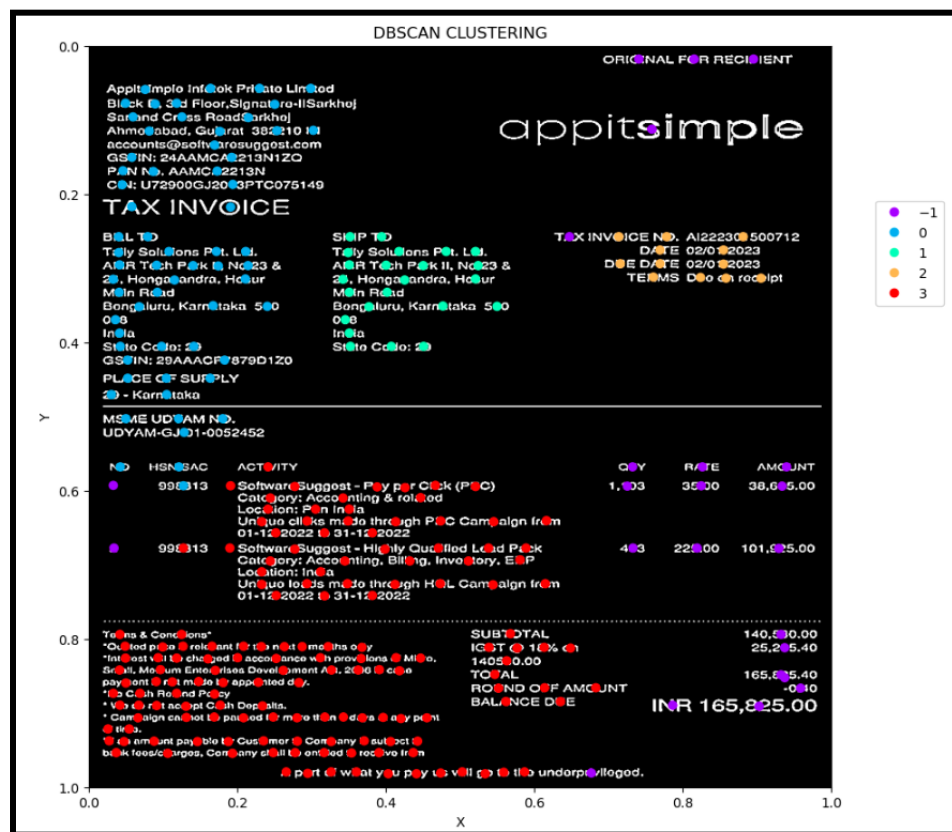

DBSCAN Output

- DBSCAN divided the clusters in a really efficient way, but the same parameters didn't work fine on all images as each image had a different format.
- There was a need for some hyperparameter tuning for DBSCAN to fit each image accurately.
- Since, there are only two hyperparameters in DBSCAN, we used two simple for loops with a range of 5 points each to tune the parameters for each image separately.
- After applying DBSCAN on 110 images, output was visualized using CV2.Rectangle function and the output was fair.

**INVOICE**

**FIESTA VACATIONS PVT LTD**  
 # 18 ( Old No.109 ) Hari Grindhaven 8th B Main,  
 39th Cross, 4th Block Jayanagar, Bangalore-56  
 011, Phone Nos: +91- 989 - 4309 4200  
 Website: WWW.FIESTAVACATIONS.CO.IN  
 GSTIN/UIN: 29AABCF0097Q1ZQ  
 State Name : Karnataka, Code : 29

Invoice No. **FVPL/2022-23/215** Dated **5-Dec-22**  
 Mode/Terms of Payment  
 Reference No. & Date. Other References  
 Buyer's Order No. Dated  
 Terms of Delivery

Buyer (Bill to)  
**MRS.DHANALAKSHMI**  
 #14, 3RD CROSS, BRUNDAVANA LAYOUT, DODDABELE ROAD,  
 KENGERI, BANGALORE - 560050  
 State Name : Karnataka, Code : 29

Particulars	HSN/SAC	Amount
<b>TRAVEL RECEIPTS - FIT INTERNATIONAL</b> <b>JORDON - COMET TOUR</b> <b>NO OF PAX: 02, DOT: 05/12/2022</b> <b>AMOUNT: RS.649433/-</b>	00440063	6,49,433.00
<b>TCS ON TOUR PACKAGE</b>		16,235.83
<b>Round Off (+/-)</b>		0.11
<b>CGST</b>		16,235.83
<b>SGST</b>		34,095.23
		7,15,999.89
		0.11

**Total ₹ 7,16,000.00**  
**E. & O.E**

HSN/SAC	Taxable Value	Central Tax Rate	Central Tax Amount	State Tax Rate	State Tax Amount	Total Tax Amount
00440063	6,49,433.00	2.50%	16,235.83	2.50%	16,235.83	32,471.66
	<b>Total 6,49,433.00</b>		<b>16,235.83</b>		<b>16,235.83</b>	<b>32,471.66</b>

Tax Amount (in words) : **Indian Rupees Thirty Two Thousand Four Hundred Seventy One and Sixty Six paise Only**

Company's GSTIN/UIN : 29AABCF0097Q1ZQ  
 Company's PAN : AABCF0097Q  
 Declaration  
 Account Name: Fiesta Vacations Pvt Ltd, Account  
 Type : Current, Bank Name : HDFC BANK LTD, Account  
 No: 02612320001156, RTGS/NEFT  
 IFSC Code : HDFC0000261, Branch Code : 0261,  
 Swift Code : HDFCINBBBNC, Branch Name : Jayanagar  
 3rd Block, Bangalore-560011, Karnataka.

This is a Computer Generated Invoice

for FIESTA VACATIONS PVT LTD  
 Bangalore

DBSCAN Clusters Visualized

- Now, as the output seemed satisfactory, this was used to modify the tesseract output and the tokens were concatenated according to the cluster they belong to.
- The final dataset after this had 770 rows for 110 images.

	conf	text	x	y	imageName
0	62.857190	INVOICE FIESTA VAGATIONS PVT LTD Tinvoice ...	0.2810	0.1895	20.jpeg
1	53.489527	Tinvoice No.  EVPL/2022-23/215 Roference fio, ...	0.5965	0.1270	20.jpeg
2	53.916695	Gated 5-Doc-22 Mod = fodarTarms of Payment 'in...	0.8425	0.1060	20.jpeg
3	57.832790	Amount i 6 49,433.00 16,235.83 16,235.83 34 3 ...	0.9210	0.4045	20.jpeg
4	84.459252	TRAVEL RECEIPTS FIT YORDON + EGYPT TOUR NO OF ...	0.2200	0.4205	20.jpeg
...	...	...	...	...	...
765	69.189151	28-Sep-22 Mode/Teems of Payment Reference(s) N...	0.8425	0.1060	62.jpeg
766	60.873739	Total VATICURY 200.000!	0.9210	0.4045	62.jpeg
767	71.821769	Gescription of Servicoss: Markating Exponse (To...	0.2200	0.4205	62.jpeg
768	72.512037	i Fotat Amount Chargeadie (in words) 'Omani Ri...	0.3055	0.8200	62.jpeg
769	45.959692	OMR 200.000! i _ &, OE)	0.7570	0.7115	62.jpeg
770 rows x 5 columns					

Dataset Created By DBSCAN