Reg.No: 210701282

Exp.No: 8

IMPLEMENT SVM/DECISION TREE CLASSIFICATION TECHNIQUES

AIM:

To write an R code to implement SVM/decision tree classification techniques.

PROCEDURE:

- 1. Install and load the required packages (e1071 for SVM and rpart for Decision Tree) and load the iris dataset.
- 2. Split the dataset into training (70%) and testing (30%) sets using a reproducible random sampling method.
- 3. Fit the SVM model with a radial kernel using the training data, print the model summary, and evaluate its performance using a confusion matrix and accuracy calculation.
- 4. Fit the Decision Tree model using the rpart function with the training data, print the model summary, visualize the tree, and evaluate its performance using a confusion matrix and accuracy calculation.
- 5. Predict the test set results for both SVM and Decision Tree models and assess their accuracy.

PROGRAM CODE:

a) SVM IN R

```
# Install and load the e1071 package (if not already installed)
install.packages("e1071")
library(e1071)
# Load the iris dataset
data(iris)
# Inspect the first few rows of the dataset
head(iris)
# Split the data into training (70%) and testing (30%) sets
set.seed(123) # For reproducibility
sample indices <- sample(1:nrow(iris), 0.7 * nrow(iris))
train data <- iris[sample indices, ]
test data <- iris[-sample indices, ]
# Fit the SVM model
svm model <- svm(Species ~ ., data = train data, kernel = "radial")
# Print the summary of the model
summary(svm model)
```


Reg.No: 210701282

```
# Predict the test set
predictions <- predict(svm_model, newdata = test_data)

# Evaluate the model's performance
confusion_matrix <- table(Predicted = predictions, Actual = test_data$Species)
print(confusion_matrix)

# Calculate accuracy
accuracy <- sum(diag(confusion_matrix)) / sum(confusion_matrix)
cat("Accuracy:", accuracy * 100, "%\n")
```

OUTPUT:

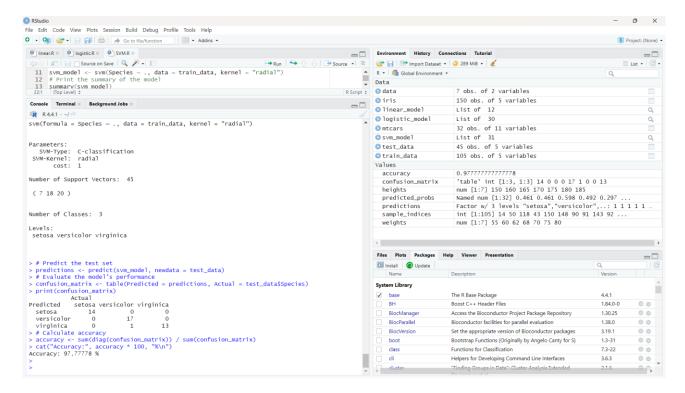

b) Decision tree in R

```
# Install and load the rpart package (if not already installed) install.packages("rpart") library(rpart)

# Load the iris dataset data(iris)

# Split the data into training (70%) and testing (30%) sets set.seed(123) # For reproducibility sample_indices <- sample(1:nrow(iris), 0.7 * nrow(iris)) train_data <- iris[sample_indices, ] test_data <- iris[-sample_indices, ]
```

Fit the Decision Tree model

Reg.No: 210701282

```
tree_model <- rpart(Species ~ ., data = train_data, method = "class")

# Print the summary of the model
summary(tree_model)


# Plot the Decision Tree
plot(tree_model)
text(tree_model, pretty = 0)

# Predict the test set
predictions <- predict(tree_model, newdata = test_data, type = "class")

# Evaluate the model's performance
confusion_matrix <- table(Predicted = predictions, Actual = test_data$Species)
print(confusion_matrix)

# Calculate accuracy
accuracy <- sum(diag(confusion_matrix)) / sum(confusion_matrix)
cat("Accuracy:", accuracy * 100, "%\n")</pre>
```

OUTPUT:

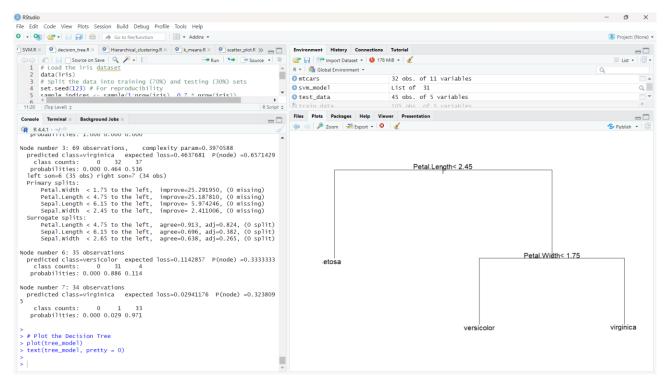

RESULT:

Thus the R program to implement SVM/decision tree classification techniques has been executed and verified successfully.