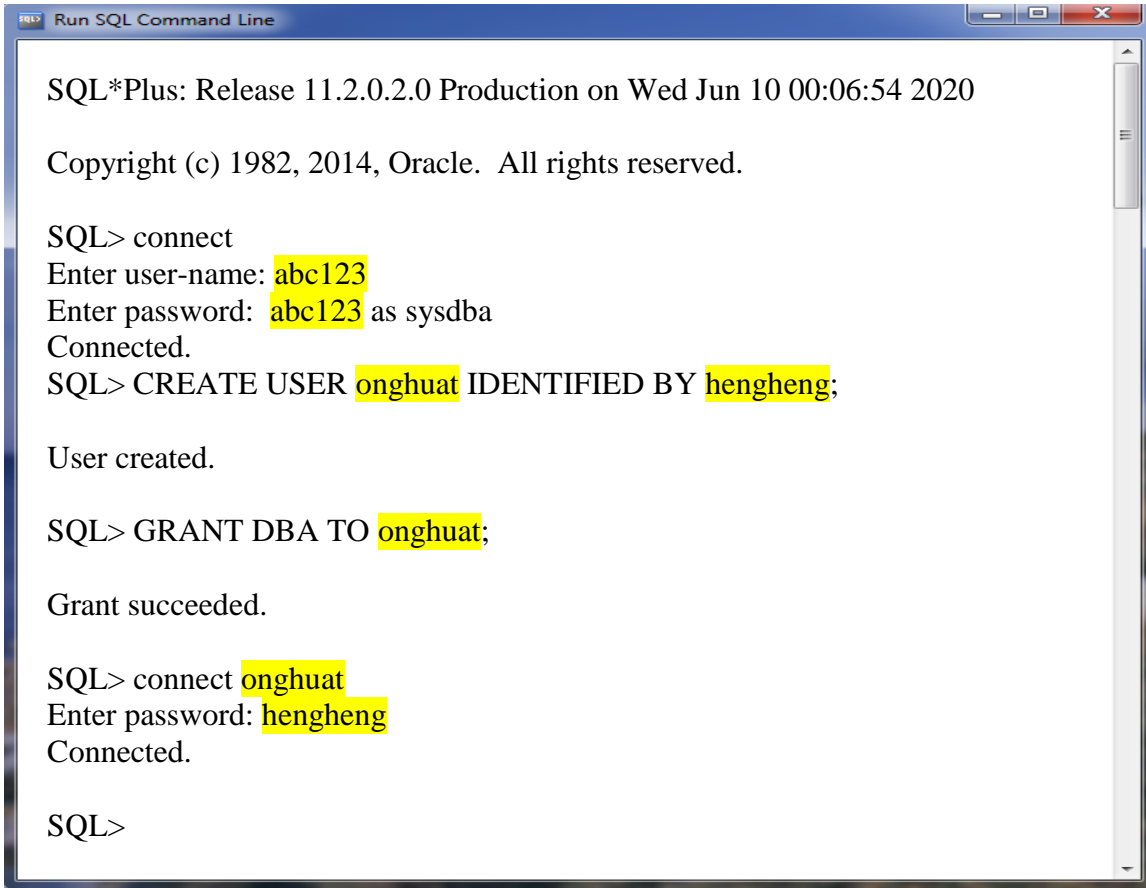


Let say **abc123** is your password during installation and you going to create a new user **onghuat** with his password **hengheng**:

A screenshot of a Windows-style window titled "Run SQL Command Line". The window contains the following text:

```
SQL*Plus: Release 11.2.0.2.0 Production on Wed Jun 10 00:06:54 2020

Copyright (c) 1982, 2014, Oracle. All rights reserved.

SQL> connect
Enter user-name: abc123
Enter password: abc123 as sysdba
Connected.
SQL> CREATE USER onghuat IDENTIFIED BY hengheng;

User created.

SQL> GRANT DBA TO onghuat;

Grant succeeded.

SQL> connect onghuat
Enter password: hengheng
Connected.

SQL>
```

* You cannot read the password or moving cursor when you enter your password.

* To make sure you are using the correct default tablespace location:

```
CREATE USER onghuat IDENTIFIED BY hengheng DEFAULT TABLESPACE USERS;
```