

DeskMate®

DeskMate®
©1986 Tandy Corporation
All Rights Reserved.

All portions of this software are copyrighted and are the proprietary and trade secret information of Tandy Corporation and/or its licensor. Use, reproduction or publication of any portion of this material without the prior written authorization by Tandy Corporation is strictly prohibited.

DeskMate®
©1986 Tandy Corporation
All Rights Reserved.

Reproduction or use, without express written permission from Tandy Corporation and/or its licensor, of any portion of this manual is prohibited. While reasonable efforts have been taken in the preparation of this manual to assure its accuracy, Tandy Corporation assumes no liability resulting from any errors or omissions in this manual, or from the use of the information contained herein.

DeskMate is a registered trademark of Tandy Corporation.

Tandy is a registered trademark of Tandy Corporation.

XENIX is a registered trademark of Microsoft Corporation.

MS-DOS is a registered trademark of Microsoft Corporation.

CONTENTS

Part One: REFERENCE

1	DeskMate	11
	Features	11
	The Applications	12
	The Desk Accessories	12
	Terminal Requirements	13
	DeskMate Conventions	13
	Control Key	13
	Escape Key	13
	Marker Movement	14
	Command Keys	14
	Filenames	16
	Wildcards	17
	Installing, Opening, and Exiting DeskMate	18
	Printing	19
2	THE MAIN MENU	23
	Using the Main Menu	23
	The Help Screens	25
	The Main Menu Functions	25
	Find	26
	Directory	27
	Name	29
	Replace	31
	Utilities	32
	Permission	32
	Select	34
	Copy	35
	Delete	35
	Add	36
	Printing Files	38

3	DESK ACCESSORIES	39
	Selecting an Accessory	39
	The Help Screens	40
	Calculator	40
	Math Functions	41
	User-Defined Formulas	42
	Internal Memory	44
	Exiting the Calculator	44
	Events/Alarm	45
	Adding or Updating an Event	46
	Setting the Alarm	46
	Changing the Date	47
	Deleting an Event	47
	Exiting Events/Alarm	47
	Messages	48
	Reading a Message	49
	Creating a Message	49
	Exiting Messages	50
	Phone Directory	50
	Finding Information	51
	Adding an Entry	52
	Editing or Deleting an Entry	53
	Printing Information	53
	Exiting the Phone Directory	54
	Scratchpad	54
	XENIX Command	55

4	TEXT	57
	Using Text	57
	The Help Screens	58
	Marker Movement	59
	The Text Functions	59
	Find	60
	Substitute	60
	Add/Replace	61
	Format	61
	Buffer	62
	Merge	62
	Select	63
	Copy	64
	Delete	64
	Insert	64
	Printing Documents	64
	Exiting Text	65

5	WORKSHEET	67
	Using Worksheet	67
	The Help Screens	69
	Marker Movement	70
	The Worksheet Functions	70
	Find	71
	Text	72
	Formula	72
	Format	77
	Buffer	79
	Merge	79
	Select	80
	Copy	81
	Delete	81
	Insert	82
	Calc	82
	Printing Data	83
	Exiting Worksheet	83
6	FILER	85
	Using Filer	85
	The Help Screens	87
	Marker Movement	87
	The Filer Functions	88
	Find	89
	Display	90
	Print	91
	Form	91
	Merge	94
	Delete	95
	Add	95
	Printing Records	95
	Exiting Filer	96

7	CALENDAR	97
	Using Calendar	97
	The Help Screens	98
	Marker Movement	98
	The Calendar Functions	99
	Find	100
	Date	101
	Calendar/Events	101
	Alarm	102
	Merge	102
	Select	103
	Copy	103
	Delete	104
	Add	104
	Printing Events	104
	Exiting Calendar	105

8	MAIL	107
	Using Mail	107
	The Help Screen	109
	Marker Movement	109
	The Mail Functions	110
	Find	110
	Reply	110
	Forward	111
	Get Mail	111
	Option	111
	Merge	115
	Select	115
	Copy	116
	Delete	116
	Create	117
	Printing Mail	119
	Exiting Mail	120
9	UTILITIES	121
	Selecting and Exiting Utilities	121
	Backup	122
	Restore	123
	Free	124
	Who	124
	Activity	125

Part Two: SAMPLE SESSION

10	BEGINNING THE SAMPLE SESSION	129
	Moving the Marker	129
	Executing Commands	130
	Differences in Terminals	130
	Copying the Sample Files to Your Directory ...	131
	Displaying the Main Menu	132
	Using Messages Within the Main Menu	134
11	USING TEXT	139
	Entering Text	140
	Duplicating Text to Another File	142
	Printing Text	145
	Substituting Text	147
	Using Calculator Within Text	149
12	USING WORKSHEET	153
	Creating a Simple Budget Worksheet	155
	Printing a Worksheet	160
	Setting Up an Amortization Table	161
	Printing a Large Worksheet	169
	Recalculating a Worksheet	170
13	USING FILER	173
	Finding and Printing Records	175
	Using Scratchpad Within Filer	178
	Creating a New Form	179
	Arranging Records Using the Order Function ...	182
	Adding New Records	182
14	USING CALENDAR	187
	Finding Events	189
	Adding and Deleting Events	191
	Using the Phone Directory Within Calendar	192
	Putting Events into the Alarm File	194

15	USING MAIL	197
	Reading Messages	198
	Using Events/Alarm Within Mail	199
	Creating Messages	201

16	ENDING THE SAMPLE SESSION	205
-----------	--	-----

Part Three: APPENDICES

Appendix A: Installing DeskMate	207
---------------------------------------	-----

Appendix B: Files Created by DeskMate	211
---	-----

INDEX	213
-------------	-----

How to Use This Manual

This manual offers you two different approaches to learning to use DeskMate®. The reference section provides detailed information about each component of the DeskMate package. The discussion of each application proceeds function by function so that you can systematically work through each chapter or answer specific questions quickly.

The sample session enables you to have a test run with the programs. You follow step by step directions that lead you through DeskMate, one application at a time: Text, Worksheet, Filer, Calendar, and Mail. Using a wide range of the DeskMate features as you go, you perform routine tasks with the applications.

Each chapter of the sample session contains a demonstration of a DeskMate Accessory—miniature applications that appear as windows on the current screen. You can use a Desk Accessory without exiting the application you are occupied with at the moment.

The chapters of the sample session are sufficiently independent of one another that you can complete them out of order if you choose. However, you will get best results if you complete the chapters in order.

In addition to reading the manual, you can answer questions about DeskMate by displaying the help screens while you are using the programs. They explain functions and commands so that you can learn new commands and jog your memory about others.

On occasion, this manual refers you to other documentation. In particular, you (or the system administrator) should have and be familiar with the Tandy 3000 *Installation and Operation Manual*. You should also have access to either *The XENIX User's Guide* or *The XENIX Operations Guide*.

DeskMate

XENIX® DeskMate for the Tandy 3000 is a versatile, easy-to-use set of applications and functions combined to save you time, energy, and space. It can replace a roomful of manual production tools including typewriter, calculator, address book, calendar, notepad, and filing cabinet. The programs use similar functions and operations throughout the applications, making them easy to learn and use.

The XENIX version of DeskMate accommodates multiple users. As one of a group of users, you can send and receive messages from other users, execute files from a pool of common system files, or gain access to files belonging to other users. A system of permissions allows you to protect specific files from use by others.

DeskMate gives you quick, easy access to your data for timely updates and corrections. Many of the applications provide “at-a-glance” information, a real asset for quick decision making and question answering. In addition to displaying DeskMate information on your screen, you can print the contents of any file.

As you gain experience, DeskMate grows with you, enabling you to replace or supplement the original applications with others that you rely upon.

Features

DeskMate features 5 major applications, each accessible from the Main Menu. Various Main Menu functions permit you to manage your files and directories with ease. The menu is “open,” giving you the freedom to add applications to the original set. Taking advantage of this flexibility in the menu, you can adjust the menu so that it displays the applications and files that you use regularly.

From the Main Menu you also have access to the DeskMate Utilities. The Utilities provide easy access to commonly used system functions that let you back up and restore files and identify current users and processes.

In each application, you can display and select from a menu of functions adapted to your needs in that particular application. In addition, you can use any of 6 Desk Accessories at any time

without exiting the application you are using. Separate chapters of this reference manual explain in detail the Main Menu functions, the Desk Accessories, and each of the applications.

Help screens are available within DeskMate to provide online reference information that parallels the menu or application you are using.

A Print command lets you print the contents of any files you create using the DeskMate applications. The chapters devoted to each application include instructions for printing.

The Applications

- **Text** is a text editor. Use it to create, review, edit, and print documents.
- **Worksheet** is a spreadsheet application that computes numbers in columns and rows. Addition, subtraction, multiplication, division, and exponentiation, as well as other set, statistical, and trigonometric operations are available.
- **Filer** is a filing system, similar to a card file. You can create any number of information forms and then file and search for records using any of the information contained in them.
- **Calendar** is an event scheduling system. You can review recorded events at any time. A list of the events for the day appears on the Main Menu.
- **Mail** is a system for exchanging messages with other users. Create messages and distribute them among other users; receive messages and file them for later reference or reply.
- **Utilities** is a group of utility commands that facilitate routine operation of your system.

The Desk Accessories

- **Calculator** performs standard mathematical operations as well as 3 functions you define.
- **Events/Alarm** reminds you of important scheduled events.
- **Messages** lets you check quickly for new mail, read it, and send short messages to other users.
- **Phone Directory** is a revolving card file for holding phone numbers and general business data.

- **Scratchpad** lets you jot down quick notes and reminders.
- **XENIX Command** enables you to execute a XENIX system command.

Terminal Requirements

You can use XENIX DeskMate with any terminal or computer with terminal software that is supported by an entry in the termcap. At present, the termcap file contains entries for any computer that uses the XENIX System V/286 operating system or a later version. The program does not support use of a DT-1.

A printer connected to your terminal enables you to perform printing tasks “locally,” that is, at your own terminal. While your local printer is engaged in a task, your terminal is inactive for other purposes. You can also share use of a printer at the Tandy 3000 console with other persons in a multi-user system.

DeskMate Conventions

Operations and key usage are very similar throughout the DeskMate applications. A quick review of the following conventions is helpful in learning how to use the program.

Control Key

DeskMate uses **CTRL** as a control key. This key works in combination with other keys to produce a key sequence. A control key works in much the same way as the **SHIFT** keys of a typewriter: hold it down while pressing the appropriate combination key.

Escape Key

Press and release **ESC** to signal DeskMate that the next key is a command. You do not hold down **ESC** while you press the second key, as you do with the **CTRL** key.

In each of the major applications, pressing **ESC** displays a menu of available command keys on the bottom lines of the screen. Press a command key or one of the arrow keys to execute a command. If you press the second key before the command lines appear on the bottom of the screen, DeskMate proceeds directly to the command you selected.

If you press `[ESC]` but decide not to execute a function, press `[ESC]` a second time to cancel the first. In an application, the command lines disappear after you press `[ESC]` the second time.

Marker Movement

Use the arrow keys, `[→]`, `[←]`, `[↑]`, and `[↓]`, throughout DeskMate for normal marker movement and for displaying specific application information. Other keys control the rapid movement of the cursor.

Marker movement varies slightly in each application. Refer to the marker movement table provided in the corresponding application chapter of this manual for specific information. Figure 1.1, which follows, describes general marker movement.

Marker Movement

Standard Key	Optional Key	Moves the Marker
<code>[→]</code>		to the right 1 position
<code>[←]</code>		to the left 1 position
<code>[↑]</code>		to the previous line
<code>[↓]</code>		to the next line
<code>[ESC] [←]</code>	<code>[PG RT]</code>	to the right margin of the screen
<code>[ESC] [→]</code>	<code>[PG LT]</code>	to the left margin of the screen
<code>[ESC] [↑]</code>	<code>[PG UP]</code>	to the top line of the screen
<code>[ESC] [↓]</code>	<code>[PG DN]</code>	to the bottom line of the screen
<code>[CTRL] [T]</code>	<code>[HOME]</code>	to display the first item in the file


Figure 1.1

Figure 1.1 lists standard marker movement keys in the lefthand column. The center column lists optional keys for some of the marker movements. If your terminal provides the optional keys and your termcap file supports them, you can use these keys in place of the standard key sequences.

Command Keys

DeskMate command keys are of 2 types. Some command keys, the function keys, are specific to the application you are using. Others, such as `[ENTER]`, produce the same result throughout the program.

When you press **[ESC]** at the Main Menu or in one of the DeskMate applications, the bottom lines on your screen change to display a menu of commands. For example, the following lines, Figure 1.2, show the command menu for the Text application.



```
1-Find 2-Subst 3-Add 4-Format 5-Buffer 6-Merge 7-Select 8-Copy 9-Delete 0-Insert
<?> Help <P> Print <X> Cancel <Q> Quit <=> Desk Accessories
```

Figure 1.2

The first command line assigns a number to each function you can use in that application. As a rule, the second line lists general commands, commands that do not vary from application to application.

Function Keys. After you press **[ESC]**, press the number key that is paired with the function you want to use. The command lines in Figure 1.2 show that pressing **[ESC]** and then **[1]** in Text selects the Find function.

If your keyboard has function keys (**[F1]**, **[F2]**, and so forth), you can use them to select functions if your terminal supports them. For example, you can select the Find function in Text by pressing **[F1]**, **[ESC]** followed by **[F1]**, or **[ESC]** followed by **[1]**.

Unless you modify the termcap entry for the console (your Tandy 3000), you cannot use its function keys.

General Command Keys. Some of the general command keys are listed on the second command line when you press **[ESC]**. (See Figure 1.2.) After you press **[ESC]**, these keys produce the following results:

- [?]** displays the Help screen that applies to your situation in an application or menu.
- [P]** enables you to adjust printer settings and then print the contents of a file.
- [X]** exits the current file, cancelling all changes you made since you opened the file.
- [Q]** lets you quit using the current file, saving all changes that you introduced since you opened it.
- [=]** enables you to select one of the Desk Accessories.

Other command keys have general system uses. The most common of these appear in Figure 1.3, along with optional keys that appear on some keyboards. If your keyboard has the optional key mentioned, you can press it instead of the key sequence.

Standard Key	Optional Key	Result
CTRL C	BREAK	cancels the current request, prompt, or command.
CTRL W	INSERT	inserts character at cursor.
CTRL X	DELETE	deletes character at cursor.
BACKSPACE		moves the cursor back over the previous character, erasing it.
ENTER or RETURN		operates the carriage return, sends a command. This manual refers exclusively to ENTER .

Figure 1.3

Filenames

A valid DeskMate filename uses no more than 10 alphanumeric characters. The 10 characters do not include the filename extension assigned by DeskMate.

You can use upper- and lowercase letters in creating filenames for DeskMate applications. Do not include any spaces within a filename. Filenames that differ in the use of upper- and lowercase do not match. For example, *FILE* does not match *file*.

Files in the same directory must have unique names. In different directories, however, you can assign exactly the same name to 2 files. When you identify an existing file, typing the filename is sufficient if the file occupies the current directory. Otherwise, you must type the *pathname* to specify the file.

A pathname locates a file (or directory) within the branching hierarchy of directories that originate in the root directory (/). As a consequence, no 2 files can have the same pathname.

For example, you can have 2 files named letter.doc. The pathname for one, however, might be /usr/edwin/letter.doc, while the pathname for the other is /usr/edwin/office/letter.doc.

Whenever you create a file using one of the standard DeskMate applications, DeskMate assigns an extension to the new filename. The filename extensions DeskMate routinely assigns are the following:

Application	Extension
Text	.doc
Worksheet	.wks
Filer	.fil
Calendar	.cal
Mail	.msg

Directory names follow the format of filenames but can contain as many as 14 characters. They are displayed with / after the final character to distinguish them from filenames.

Wildcards

DeskMate lets you use wildcards that result in matches of non-identical items. This feature is useful when you are searching for a group of related filenames. By including a wildcard in the filename you are specifying, you can find a range of files. DeskMate recognizes * and ? as special matching characters in wildcards.

- * matches any number of characters

For example, ***pin** matches **pin** or **spin** or **hairpin**, but not **pine**.

- ? matches any single character

For example, **sec1.?** matches **sec1.3** or **sec1.0**, but not **sec2.0** or **sec1.31**.

Filenames that begin with a period (.) are exceptional. The program does not match the period with either of the special characters.

For example, ***chap*** matches **chap_1** or **xchap_2.2**, but not **.chap_1**.

Installing, Opening, and Exiting DeskMate

To begin using DeskMate, perform the one-time installation procedure described in Appendix A. After the initial installation, you can open DeskMate a couple different ways.

Note: On a system configured with minimal swap space or RAM, you can encounter system halts with multiple users. Similar problems can occur if, as a single user, you add large applications to the original DeskMate applications. To avoid such problems, we suggest that you equip your system with 2 meg of RAM and 2 meg of swap space.

DeskMate provides a valuable Main Menu to help you locate, open, and otherwise manage your DeskMate files and applications. The next chapter contains detailed instructions for using the Main Menu and its functions. By using the menu, you also have the advantage of selecting from displayed lists of directories, applications, and files, thereby avoiding errors in identifying them.

At times, however, you may prefer to open a file without displaying the Main Menu. To open an application from your system command (in your home directory), type **desk**, followed by a space, and then the program name for the application. The program names for the various applications are the following:

To Open:

Text
Worksheet
Filer
Calendar
Mail

You Type:

dmtext
dmwsheet
dmfiler
dmcal
dmail

After you press **ENTER** the initial screen for the application appears. (If the application has a default file, that file opens; otherwise, it prompts for a filename.)

You can open a specific file directly from the system prompt by typing **desk** and then a series of names: the program name followed by the filename (including any subdirectories). For example, to open a document file named **lhead.doc** in a subdirectory of your home directory named **correspondence/**, you can type the following command from your system prompt:

desk dmtext correspondence/lhead.doc

Exit the file by pressing and then either to Quit or to Cancel. Quitting preserves any changes you made to the file while Canceling ignores them. When you exit a file that you opened from the system prompt as described above, you return to the system prompt.

While you are using a DeskMate file, it is locked to other users. Another person trying to open the file receives a message that the file is in use.

It is important that you make frequent backup copies of your files. Duplicating your files onto floppy diskettes protects you against the appreciable losses of data (and work) that could result from equipment or power failures or through operator error. See the chapter titled “Utilities” for a discussion of the Backup utility.

Printing

When you press and then to print the contents of a file, the printer settings appear on the screen so that you can make selections. Preset values appear for your system. Figure 1.4 shows these settings along with their initial values.

Printer Settings

Total lines per page	66
Printed lines per page	60
Left margin	0
Printed line width	80
Double spacing (Y/N):.....	N
Print: Console, Local, Screen, File ...	C

Figure 1.4

To change any of the settings, move the cursor to the value you want to change; then, type over the existing characters and press **ENTER**. Answering the last prompt begins the print operation. If all the settings are correct as displayed, press **ESC**, then **Q** to start printing. To cancel the Print command and return to the current file, press **CTRL** **C**.

The first setting indicates the total number of horizontal lines on a page. Standard 11-inch sheets have 66 lines. The second setting specifies the maximum number of lines to print on a single page. This value depends upon the amount of top and bottom margin you want to have.

The next 2 settings determine the horizontal arrangement of the text on the page. The standard number of spaces across the entire page is 80 for letter-size sheets and 132 for wide pages (printing at 10 pitch, or 10 characters per inch). The value for the left margin, the third setting, is the number of blank spaces on the left side of the text. The next setting specifies the maximum number of characters to print per line, the actual line width.

The final settings determine the form of output for the printed document. Indicate your choice by entering the first character of the output form you choose.

You can specify that the printed copy be produced at either the console printer (C) or at a local printer (L). Using your local printer precludes other use of your terminal while the printing occurs.

The other 2 possibilities display the printed form on the screen (S) or save the document in its printed format in a file (F). If you print to the screen, the process pauses at the end of each page, enabling you to quit or continue to the next page. If you choose to create a file to store your document (complete with its printing parameters), an additional prompt appears, `Output file-name:.` Enter a filename for the output file.

After you respond to the final prompt, the print operation begins. You can also begin printing without moving to the final prompt. Whenever the settings meet your requirements, press **ESC** followed by **Q** to begin printing.

Generally, the Print command prints the entire file unless you first define a block of data using the Select function. Any minor variations in the printing procedure appear in the “Printing” section of the chapters that follow.

Note for background printing: If you set your lpr file to do background printing in DeskMate, precede the ampersand (&) with a backslash (\).

THE MAIN MENU

Using the Main Menu

Log on to your system using your user name and password. (You or the system administrator select these when you become a user.) As a general practice, do not run DeskMate while logged in as root. To display the DeskMate Main Menu, type:

desk ENTER

Figure 2.1 illustrates the appearance of the Main Menu with hypothetical data to show the arrangement of information on the screen.

<ESC> = Commands			Menu		11/21/85 10:30am
Nov 1985 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30			Events for Today: Bids due for Goren contract 10:00a Meet West to discuss convention 01:30p Appt. with Ruff at club		
			Current Directory: /usr/sample/		
Text	Worksheet	Filer	Calendar	Mail	APPLICATION
Address.doc Lhead.doc Speech.doc Memo.doc	Forecast.wks	Clients.fil Vendor.fil	dmevents.cal	dmbox.msg	

Figure 2.1

The top line of the Menu, as it does in each application, identifies the application (or menu). The date and time appear at the right end of this *status line*. The line also carries a reminder that you press ESC to execute commands. If you do not press a command key immediately after releasing ESC, the menu or application displays a list of the available commands (at the bottom of the screen).

DeskMate reserves the left end of the status line for system messages. If an alarm has occurred, the word `ALARM` appears in the space, as illustrated in Figure 2.1. The word `MAIL` announces the arrival of a message.

At the top left of the Main Menu is a calendar for the current month. Today's date (the current system date) is highlighted. (The figure shows the data used in the Sample Session.)

To the right of the calendar, 3 hypothetical events appear under `Events for Today`. These are upcoming events that have been entered using the Calendar application.

The lower portion of the screen displays your applications and the files in the current directory. The applications appear horizontally at the head of the columns on the menu. The figure shows the 5 applications supplied with DeskMate, arranged as they initially appear on your Main Menu.

The sixth column lists applications other than the 5 that head the preceding columns on the menu. When you first install DeskMate, this column is empty. As you use the program, however, you may find it convenient to add other applications to the menu and execute them without exiting to the system. Merely move the marker to the desired application, and press `[ENTER]`. You can even substitute one of these "sideline" applications for any of those that appear at the heads of columns on the Main Menu.

Listed in the columns below the 5 applications are the files in the current directory that you can use with each one. If you change directories, the columns change to display a different group of files.

To open a file, position the marker at the head of the column that contains it using the left and right arrow keys. Then, specify the filename in either of 2 ways:

Press `[ENTER]` with the marker at the head of the column. Then enter the name of the file you want to open at the prompt at the bottom of the screen.

Or

Highlight the filename you want to choose, using the up and down arrow keys to position the marker. Press `[ENTER]` to execute the file.

Of course, some files do not appear on the Main Menu. To execute files of this sort, a file in a different directory, for example, use the functions on the Main Menu to rearrange or expand the list of files on the menu.

The majority of this chapter is devoted to these Main Menu functions. They enable you not only to expand and rearrange the information on the menu, but also to add and delete items, find a file or group of files, or execute DeskMate utilities. Other functions let you copy or rename your files and alter their accessibility to other users.

When you are ready to exit DeskMate, return to the Main Menu, and press **[ESC]** and then **[Q]** to return to your system prompt. At the system level, type **logout** **[ENTER]** to log out.

The Help Screens

While using the Main Menu, you can display help screens by pressing **[ESC]** and then **[?]**. The help screens describe each of the available functions. The location of the marker on the menu determines the particular help screens that appear.

Press **[ENTER]** to see the next help screen or **[P]** to see the previous one. Press **[CTRL] [C]** to return directly to the situation you left on the Main Menu.

The Main Menu Functions

When you press **[ESC]** at the Main Menu, the bottom lines of the screen show a series of numbered commands—the Main Menu functions. Below these, on the last line, is a series of general DeskMate functions, described in the previous chapter.

The Main Menu functions help you manage the directories and files in DeskMate. This chapter explains them in detail.

To select a Main Menu function, press **[ESC]** (to display the command lines at the bottom of the screen), and then press the number key corresponding to the function you want to use. The command lines, including both general and Main Menu functions, appear as follows:

```
1-Find 2-Dir 3-Name 4-Replace 5-Util 6-Permission 7-Select 8-Copy 9-Delete 0-Add  
<?> Help <P> Print <X> Cancel <Q> Quit <=> Desk Accessories
```

If your keyboard is so equipped, you can use the function keys (F1, F2, F3, etc.) instead of the number keys after pressing **[ESC]**, or you can simply press the appropriate function key in place of both keys. Your termcap file must support the function keys. To select the Find function, for example, press **[ESC]** followed by **[1]** or press **[ESC]** and then **[F1]** or merely press **[F1]**.

Find

Use the Find function to save time in locating the file or group of files you want to use. When you select this function, the following prompts appear at the bottom of the screen:

```
Search directory:  
Filename or wildcard:
```

The current directory name appears after the first prompt. Press **[ENTER]** to search for a file or files in that directory, or type the name of a different directory.

At the second prompt, type a complete filename or include special wildcard characters to match a range of filenames. Press **[ENTER]** when you finish typing the filename or wildcard.

After you answer the second prompt, a window appears on the screen that displays the names of all files matching the search string. Use the arrow keys to read any listings that run off the display area. The Find window scrolls to display the remainder of the list.

To return to the previous screen, press **[CTRL] [C]** to cancel or press **[ESC]** followed by **[1]**.

Directory

When you select the Directory function (Dir), the screen shows the arrangement of directories and files. By using the marker movement keys along with the functions on this screen, you can quickly locate and execute files that are not currently listed on the Main Menu. Other functions enable you to add and delete directories.

After you press **[ESC]**, then **[2]**, a prompt appears at the bottom of your screen:

```
<ENTER> to Expand or  
New Current Directory:
```

Press **[ENTER]** to clear the screen and display an expanded version of the current directory. To change the current directory without leaving the Main Menu, type the pathname for the replacement directory and press **[ENTER]**. The files in the specified directory appear in place of those currently on the screen.

If you press **[ENTER]** to expand the directory, the screen presents a list of directories and files. At the top of the list is the current directory—your home directory unless you have previously changed directories. Indented in a column below the directory name are the files and directories it contains.

Use the arrow keys to move the marker up or down the column. As you do, the screen displays other directories and files, indented to indicate their positions in the root file system. The expanded list scrolls to show the contents of each directory that is in the pathname of the current directory. Executing the Dir function in `/usr/john/`, for example, results in a listing of the contents of `/ (root)`, `usr/`, and `john/`.

Directories are always identified by a diagonal mark (`/`), the final character in each directory name. An asterisk (`*`) after a filename indicates a file that you have permission to execute. The `*` is not a character in the actual filename.

Expanding Other Directories. To expand other directories, position the marker on the directory name and press **[ENTER]**. The files and directories within the marked directory appear on the screen. If, for example, you execute the Directory function with `/usr/sample` as your current directory, your screen would be similar to that shown in Figure 2.2. The bottom lines in the figure illustrate the command lines that appear when you press **[ESC]**. (Press **[ESC]** again to eliminate them.)

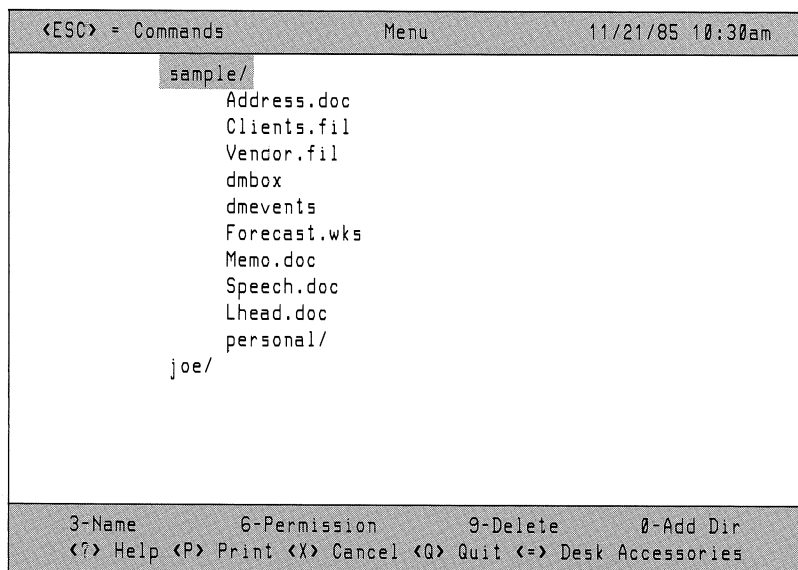


Figure 2.2

Pressing **ENTER** with the marker on an expanded directory reverses the process, compressing the list to the marked directory level.

When you expand a directory, only the next level of files and directories appears; however, when you compress the list, all sub-levels retract at once. For example, in Figure 2.2, you can press **ENTER** with the marker on `personal/` to see the contents of that directory. The next level of files and directories within `personal/` appears. But if you move the marker to `sample/`, and then press **ENTER**, all entries between `sample/` and `joe/` disappear from the display.

Opening a File. The expanded directory offers a convenient way to open files. Press **ENTER** with the marker positioned on a file-name (rather than a directory), to execute the file. Opening a file in this way is especially attractive if the file occupies a directory other than your home directory or belongs to an application in Column 6.

When you exit a file that you opened from the expanded menu, DeskMate returns you to the expanded menu.

Using Functions in the Expanded Directory. A number of Main Menu functions are available to you while you are using the expanded directory. Press **[ESC]** and then the appropriate number key to select a function.

Three functions—Name, Permission, and Delete—are identical to those on the Main Menu, described elsewhere in this chapter. The Add Directory function (Add Dir) is unique to the expanded menu.

The Add Directory function enables you to create a new directory. Move the marker to the existing directory in which you want to locate the new directory (or to any file in the existing directory). Press **[ESC]** and then **[0]**. The following prompt appears:

New directory:

Type a name for the new directory, and press **[ENTER]**. The program creates the directory and redisplayes the expanded menu, complete with the new item.

Returning to the Main Menu. To return to the Main Menu from the expanded menu, use either the Cancel function or the Quit function. Press **[ESC]** and then **[X]** to use the Cancel function; it returns you to Main Menu in the same directory you occupied when you executed the Dir function.

Pressing **[ESC]** and then **[Q]** to use the Quit function also returns you to the Main Menu, but it changes the current directory if the marker is resting on a different directory. If the marker is on a file rather than a directory, the current directory does not change when the Main Menu reappears (regardless of the location of the file).

Name

Use the Name function to change the name of a file, directory, or application. Using the arrow keys, move the marker to the item whose name you want to change. You can highlight file or application names on the Main Menu. To highlight a directory (or file) name, first display the expanded menu using the Directory function.

Press **[ESC]** and then **[3]** to choose the Name function. If you are renaming a file or directory, the following prompts appear at the bottom of the screen:

```
Rename from:  
To:
```

When the prompts appear, the first one identifies the file under the marker (its complete pathname) as the one to rename. On the second line, type the new name for the specified file. Press **[ENTER]** to execute the name change or **[CTRL] [C]** to cancel the change.

If you highlight an application for renaming, the following window appears in the lower portion of the screen:

RENAME APPLICATION

Menu name: Worksheet

Execution command:
 /appl/desk/dmwsheet _____

Working directory:

Filename wildcard: *.wks _____

Figure 2.3

Figure 2.3 contains sample data for the Worksheet application. To change the name or any other information in the window, position the marker using the arrow keys and type over the existing characters.

For example, you could type change the Menu name of Worksheet to Ledger by moving the cursor to the W in Worksheet and typing **Ledger** **[ENTER]**. Press **[ENTER]** at each of the remaining items to execute the change, or press **[CTRL] [C]** to cancel the change. (See the instructions for the Add function in this chapter for an explanation of the other items.)

Replace

As Figure 2.4 shows, you can set up DeskMate to provide access to a range of applications. The applications on the Menu itself are the original 5 applications, but those in the sixth column have been added to the DeskMate Menu. Using the Replace function, you can replace any of the original 5 applications with one of those in the last column.

<ESC> = Commands			Menu		11/21/85 10:30am
Nov 1985 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30			Events for Today: Bids due for Goren contract 10:00a Meet West to discuss convention 01:30p Appt. with Ruff at club Current Directory: /usr/sample/		
Text	Worksheet	Filer	Calendar	Mail	APPLICATION
Letters.doc Lhead.doc Labels.doc	Forecast.wks	Clients.fil Vendors.fil Inventory.fil	dmevents.cal Projects.cal	dmbox.msg Johnson.msg	Multiplan Prfile Scriptit Unify Vi Editor

Figure 2.4

Position the marker on one of the application names, either one in the row of active applications on the Main Menu or one of the “sideline” applications in Column 6. Then, press **[ESC]**, followed by **[4]**. The screen displays brackets, < and >, on either side of the chosen application. The marker shifts to the first application available for exchange.

Next, position the marker on the application you want to replace with the one in brackets. Then, press **[ENTER]** to execute the replacement. The menu redraws the screen to accommodate the exchange, swapping the applications on the screen and listing files (in the working directory) for the newly deployed application. To cancel the function, press **[CTRL] [C]** before executing the replacement.

Utilities

Use the Utilities function (Util) to display a list of system utilities. They appear on the Main Menu in the sixth column, replacing the list of applications in that column.

Press **[ESC]** and then **[5]** to execute a utility. Choose a utility in the same way that you execute a file—by positioning the marker and pressing **[ENTER]**.

The 5 utilities listed on the menu are the following:

Utility	Purpose
Backup	Saves files to floppy diskette
Restore	Restores backup data to the disk
Free	Displays available disk space
Who	Lists users currently logged on system
Activity	Lists processes currently running

Chapter 9, “Utilities,” provides a detailed explanation of each utility.

Most utilities return you to the Main Menu after you execute them. A few, however, display information on the screen until you quit (**[ESC]** and then **[Q]**) to return to the menu. When the Main Menu reappears, move the marker out of Column 6 to redisplay the APPLICATION column.

Permission

The Permission function lets you change the permission settings of files or directories that you own. In addition, you can change the permission settings assigned to all new files and directories you create. These settings determine the degree of access to a file or directory that the system extends to various users.

On the Main Menu, you change permission settings for the current file or for a block of files (defined using the Select function). To change the settings for a directory, you must first display the arrangement of directories using the Directory function. Then, position the marker on the directory you want the changes to affect.

Press **[ESC]** and then **[6]** to choose the Permission function. The screen displays a window with the table shown in Figure 2.5.

The Permission function recognizes 3 categories of users: You, Your Group, and Everybody. Your Group refers to a pre-identified

group of users that includes you; Everybody refers to anyone with access to the system. You can assign different levels of permission to each type of user.

CHANGE PERMISSION			
On File/Directory:			
filename			
	Read	Write	Run
You (Owner)	y	y	y
Your Group	y	n	y
Everybody	y	n	y
Press <ENTER> to change each name			
<A> to change All marked names			
<S> to skip a name			

Figure 2.5

In the figure, notice the 3 types of users in the lefthand column. Arranged horizontally are the 3 types of access—Read, Write, and Run—which are defined as follows:

- Read — permits the designated user to read the file or directory contents
- Write — permits the designated user to make insertions in and deletions from the file or directory
- Run — permits the designated user to execute programs stored in the specified file or directory

The first blank contains the file or directory you highlighted or the first of the group of files you selected. Using the arrow keys, move the marker to any of the 9 settings that you want to change. Press **[Y]** or **[N]**. A y indicates that permission is given; an n indicates no permission.

When you finish changing settings, press **[ENTER]** to execute the changes for the file or directory shown.

The last 2 lines appear only if you selected a number of files. The filenames appear successively (beginning with the last item you selected) each time you press **[ENTER]**. Press **[A]** to change all selected files at once to the permissions you have set. To skip a file, press **[S]**.

There are routine permission settings that apply whenever you create a new file or directory. You can change these standard, or *default*, settings by selecting the Permission function on the Main Menu with no file marked. After you press **[ESC]** and then **[6]**, the following prompts, rather than those shown in Figure 2.5, appear at the bottom of the screen:

	Read	Write	Run
You (Owner)	y	y	n
Your Group	y	n	n
Everybody	y	n	n

Press <ENTER> to change

As before, press **[Y]** or **[N]** at any position in the table to give a permission or deny it. After you execute (or cancel) the function, the Main Menu returns. If you cancel the function, you cancel any changes you have made to the previously established values.

Select

The Select function lets you specify more than a single file with which to perform a second function—Copy, Delete, or Permission.

To make a selection, move the marker using the arrow keys or the Find function to the desired file. Then, press **[ESC]**, followed by **[7]**. Make additional selections by pressing **[↑]** or **[↓]**. The screen highlights all selected files. Press **[CTRL]** **[C]** to cancel all selections.

Note: When selecting a block of files, the Find function can be extremely useful. Because you are defining a block of consecutive files, it is helpful to execute the Find function using a wildcard to compile a list of files that interest you. Then, select a block of files from those displayed in the Find window.

Files remain selected until you perform a function with the selected group, unselect it by pressing **[ESC]** and then **[7]** again, or exit DeskMate.

Copy

Use the Copy function to duplicate files in another directory. You can also copy a single file to another file.

Begin by moving the marker to the file you want to copy or by selecting a set of files (using the Select function). Next, press **[ESC]**, then **[8]** to use the Copy function. The following prompts appear at the bottom of the screen:

Copy to (Directory):

At the prompt, type the pathname of the directory in which you want to duplicate the file. You can choose to specify a filename (rather than the name of a directory) **only if** you are copying a single file in the current directory. Press **[ENTER]** to execute the function and return to the Main Menu. Press **[CTRL] [C]** to cancel and return to the Main Menu.

Delete

Use the Delete function to eliminate files, directories, or applications. On your Main Menu, indicate a file or application for deletion by positioning the marker on the file or application name. Define a block of files for deletion using the Select function.

With the item to be deleted under the marker, press **[ESC]** and then **[9]** to choose the Delete function. The prompts shown below appear at the bottom of the screen so that you can confirm each deletion. (Both lines appear only if you select a block of files to delete.)

Press <ENTER> - Delete, <A> - Delete All, <S> - Skip, <CTRL><C> - Cancel
Delete: *pathname* (Y/N)?

Press **[ENTER]** or **[Y]** to delete the item currently shown. If you selected a number of files, each is displayed in turn so that you can either confirm the deletion or press **[S]** to skip the individual item currently displayed. You can preempt this item-by-item confirmation of each deletion by pressing **[A]** to delete all selected items at once.

Pressing **[CTRL] [C]** cancels the Delete function without making further deletions.

When you delete an application, it must be located in the sixth column — not deployed at the head of one of the first 5 columns. If necessary, use the Replace function to move an application name from a column head to Column 6.

To mark a directory for deletion, begin by executing the Directory function to display the expanded menu. Be certain that the directory you want to delete is empty. (Try to expand it by pressing **[ENTER]**.) Delete any files or directories it contains before attempting to delete it.

Add

The Add function creates a new file in the current directory or adds an application to your menu. To make a new directory, expand the menu by pressing **[ESC]** and then **[2]** and use the Add Directory function available there. (See details in the preceding section about the Directory function.)

To add a file, press **[ESC]** and then **[0]** with the marker positioned anywhere on the menu except Column 6. The following prompt appears:

New file:

Enter the name of the new file at the prompt. Include the appropriate filename extension if you want to create the file under a particular application. For example, type **Memo.doc** **[ENTER]** to create an empty Text file in the current directory.

Do not create empty files in this manner for the Filer application. Create Filer files by pressing **[ENTER]** with the marker on the application name.

To add an application, use the Add function and respond to the prompts. Press **[ESC]** and then **[0]** with the marker in Column 6, the APPLICATION column. The following window appears:

ADD NEW APPLICATION

Menu name: _____

Execution command: _____

Working directory: _____

Filename wildcard: _____

In the first blank, enter the name of the application as you want it to appear in your Main Menu. To add Multiplan, for example, you could enter **Multiplan** or **Spreadsheet** or some other easily recognizable name.

At the next prompt, respond with the execution command for the program you are adding. The execution command is the entry word or series of characters that loads and executes the program. In the case of Multiplan, the execution command is **mp**. Include on this line any parameters necessary for passing a file to the application.

The next prompt, *Working Directory*, enables you to specify a particular directory that contains all your files for the new application. After you substitute the new application for one of the existing column heads, the menu displays its files in the column below it. If you specified a working directory for the application, the files on your Main Menu are the files from that working directory, regardless of the current directory. If you do not specify a working directory, the menu shows the application files in the current directory.

If, for example, your Multiplan files are all in a directory named `/usr/kilroy/spreadsheet`, you can enter this pathname as the working directory when you add Multiplan. When you deploy the application on the menu, your Multiplan files appear below the application name. If you position the marker on a Multiplan filename and press **ENTER**, DeskMate opens the file as though it occupied the current directory.

In the fourth blank, enter the filename extension. This, too, depends on the specific application. The application assigns the extension to the filename for each file it creates. Type `*.mp` in the blank and press **ENTER**, for example, to add Multiplan. (The filename extension is not necessarily identical to the execution command.)

When you finish responding to the prompts, press **ESC** and then **Q** to add the new application. Once added, it appears in the *APPLICATION* column under the name you assign at the first prompt. It is available from within DeskMate and can, if you wish, replace any of the applications on the Main Menu itself.

Printing Files

The Print function enables you to print the contents of a file from the Main Menu. Avoid printing Worksheet and Calendar files in this way, however. (Because these files contain non-ASCII characters, the printed copies contain unintelligible data in addition to the information you entered in the files.)

To print the contents of a file, position the marker on the file-name, and press **[ESC]**, then **[P]**. A window containing printer settings appears on the screen. Enter any changes you want to make. With your printer online and properly connected, press **[ENTER]** at all prompts or press **[ESC]** followed by **[Q]** to begin printing.

DESK ACCESSORIES

The DeskMate accessories are “mini-applications” that are available to you while you are using the major applications of DeskMate. An accessory occupies only a portion of the screen. Behind this region, or *window*, the current application or menu screen is displayed in the background. When you finish using the accessory, DeskMate returns you to the background activity and redisplay the full screen.

Selecting an Accessory

Press **[ESC]** to display the command lines from any of the major applications or from the Main Menu. The bottom line shows the general DeskMate functions, among them **[=]** to execute the Desk Accessories. Press **[=]** to display the menu of Desk Accessories. Figure 3.1 shows the 6 accessories you can choose from the menu.

Desk Accessories
Calculator
** Events/Alarm
Messages
Phone Directory
Scratchpad
XENIX Command
<ESC> = Commands

Figure 3.1

Select an application from the menu in either of 2 ways:

- Use the arrow keys to highlight the accessory you need, and then press **[ENTER]**.
- Press the first letter key in the name of the accessory you want to use. Press **[C]**, for example, to use the Calculator.

You can select an accessory without waiting for the menu to appear. Press the letter key that executes the accessory immediately after you choose Desk Accessories from the command line (by pressing **[ESC]** and then **[=]**).

In the sample above, the 2 stars (**) to the left of `Events/Alarm` indicate that the alarm has gone off. Similarly, 2 stars appear to the left of `Messages` if any new messages have not been retrieved from the system mailbox. The menu stops displaying the signal once you select the starred application.

To exit the menu of Desk Accessories, press `[ESC]` and then `[Q]`. The program redisplay the screen you left when you chose to use an accessory.

The Help Screens

Each of the accessories, as well as the Desk Accessory menu, has help screens to explain the available commands. Press `[ESC]`, then `[?]` to display the help screen. To display the next screen, press `[ENTER]`.

Press `[P]` to display the previous help screen. To return immediately to the accessory you were using, press `[CTRL] [C]`.

Calculator

The Calculator accessory enables you to execute those mathematical operations that you typically perform on a calculator. In fact, the Calculator window simulates a handheld calculator on your screen. To select the Calculator from the menu of Desk Accessories, press `[C]` or press `[ENTER]` with the marker on `Calculator`. The window depicted in Figure 3.2 appears.

The calculator operates in much the same way that a standard calculator does. It uses a 10-digit display (no commas) and a floating decimal point format. It has 5 functions and 3 user-defined formulas. Its internal memory retains a value that you can reuse in the course of your calculations or recall after you exit and return to the accessory.

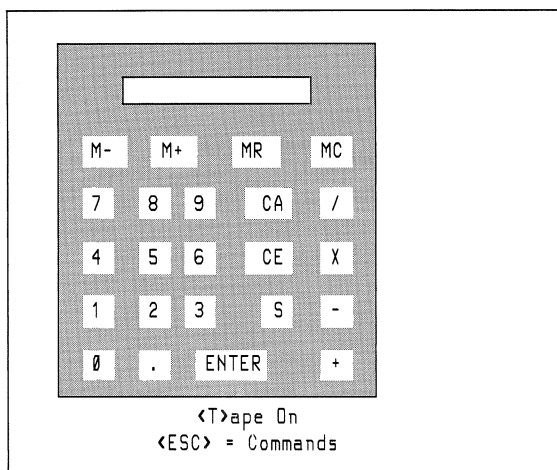


Figure 3.2

As with a standard calculator, entries and computed results appear on the *entry line*, the “display window” at the top of the calculator. The window displays numbers of 10 or more digits in scientific notation.

If the number you type exceeds 15 digits, the digits scroll off the entry line (so that the cursor is always visible). When you press **ENTER** or an operator, the number appears in scientific notation. The entry line displays as many significant digits as the display area permits.

On the right side of the screen, your calculations scroll upward much like a tape readout. This permits you to look at previous calculations until they scroll out of the display window. Press **T** to turn the tape display on and off.

A message below the calculator, **<T>ape On** or **<T>ape Off** tells you whether or not the tape is recording your calculations. Also, a line separates the tape from the calculator when the tape is off.

Math Functions

To use one of the standard operators, clear all current values by typing **CA**. Type the first number, or *operand*, so that it appears on the entry line. Each numeral pushes the number you are typing 1 character to the left.

If you type more digits than the entry line can hold, the excess characters scroll off the left edge of the line. The calculator retains the digits even though they are not visible. This enables you to perform calculations with numbers of more than 10 digits. However, the calculator displays the result on the entry line in scientific notation if it exceeds the display space.

To reverse the sign of the number on the entry line, press **[S]**. A minus sign **directly** in front of a number indicates a negative number. Pressing **[S]** reverses the sign of an existing number, **not** the number you are about to type.

If you make an error and want to clear the current entry, type **CE**. The entry line clears (without affecting the operator).

After you type the first operand, indicate an operator; the characters **+**, **-**, **x**, **/**, or **!** signify addition, subtraction, multiplication, division, or exponentiation respectively. It appears on the entry line along with the first operand.

Type the second operand, and press **[ENTER]** to calculate the result of the indicated operation. To reuse the first operand, merely press **[ENTER]**. The result appears on the entry line and on the tape readout.

If your calculation requires more than 2 operands, you can continue to type operands separated by operators and press **[ENTER]** only when you are ready for a result. For example, to compute $11/2 \times (-18)$, type:

11/2x18s [ENTER]

The only result you see is the final result (-99). Note that you press **[S]** **after** typing the operand 18 to make it a negative number.

To perform another calculation, you can type **CA** to clear the current one. Or you can use the result of the previous calculation as the first operand for a new calculation.

User-Defined Formulas

The calculator provides 3 functions for which you can define a formula of your own. To execute one of these formulas, press **[ESC]** and then a number key—**[1]**, **[2]**, or **[3]**. (On a properly equipped terminal, you can substitute function keys to execute the corresponding formula.)

Each time you select a formula, the formula edit window appears so that you can define a formula or edit one that you have defined previously. In the center of the accessory window, a rectangular space clears.

The first line displays the formula currently assigned to that function. If you have not stored a formula for that function, the entry line is blank.

Below the entry line is a second rectangular region that displays the operators and edit characters you can use when you are defining a function. Figure 3.3 shows the formula edit window with a sample function.

50+(axb!2)
Operators: + - x / ! () 1234567890ABCD. Edit Chars: <-- --> space backspace

Figure 3.3

The calculator accepts only the characters shown to define formulas. You can use the 4 math operators plus ! to indicate an exponent. The parentheses indicate operations to be performed out of sequence; otherwise, the Calculator performs all operations in sequence from left to right.

A, B, C, and D (upper- or lowercase) are the only allowable variables. The left and right arrow keys move the cursor without erasing existing characters on the formula entry line; the space bar and BACKSPACE erase characters as they move the cursor.

The left and right arrow keys move the cursor across existing characters without altering them. The space bar leaves a blank space at the current cursor location; BACKSPACE erases the character to the left of the cursor.

The sample formula in Figure 3.3 finds the product of a and b, squares the result, and then adds 50. Were it not for the parentheses, the first calculation indicated by the formula would be the sum of 50 and a.

When you execute a formula containing variables, a prompt appears in the entry line requesting a value for any variables used in the computation. To perform the function in Figure 3.3, the entry line prompts A = ? for the value of the first variable. (After you use the function, the prompt displays the most

recently entered value for A rather than ?) Type a value for A, and press **[ENTER]**. At the next prompt, enter a value for B.

When you supply a value for a variable, you can type **MR** to use the value in Memory. (See the following discussion of Memory.) You cannot perform a calculation at the prompt (to substitute the result for the variable).

When you execute a formula, the numbers you enter echo on the tape readout. The final result is displayed on the entry line as well as on the tape. The tape does not record the separate calculations in the formula.

When you exit the calculator using the Quit function, it stores your formulas and current values of variables so that you can reuse them or edit them when you return to the accessory.

Internal Memory

The Memory feature on your calculator stores a value that you can use as a separate accumulator while you perform other computations. The calculator on your screen shows 4 keys that control the value stored in Memory.

To store the value on the entry line in Memory, type **MC** to clear the current value and then **M+**. Clearing the current value sets the Memory equal to 0. Typing the second command then adds the value on the entry line to the current value. The value you enter for Memory appears above the calculator depicted on the screen.

Once you have a value in Memory, you can add or subtract the number on the entry line by typing **M+** or **M-**. If you want to use the value in Memory as an operand, you can type **MR**. On the calculator, **MR** redisplay the value in Memory on the entry line.

The screen displays the current value in Memory until you clear it by typing **MC**. If you exit the Calculator using the Quit function, the current value remains stored in Memory. The Calculator redisplay it when you reopen the accessory.

Exiting the Calculator

When you want to exit the Calculator, press **[ESC]** and then **[Q]** to quit or **[ESC]** followed by **[X]** to use the Cancel command. The first method saves any formulas you defined as well as the current Memory value. Canceling, on the other hand, erases any changes

you made in formulas or in the value of Memory since opening the accessory.

After you exit the Calculator, the screen redisplay the application or menu as it appeared when you chose the accessory.

Events/Alarm

The Events/Alarm accessory displays the events that you have stored in the primary Calendar file, `dmevents.cal`. The screen shows events for the current day.

Note: Because the Events/Alarm accessory displays the events list from `dmevents.cal`, you cannot use that accessory from `dmevents.cal`.

To select Events/Alarm from the menu of Desk Accessories, press **[E]** or move the marker to Events/Alarm and press **[ENTER]**. Figure 3.4 depicts the Events/Alarm window with sample data to show the arrangement of information on the screen:

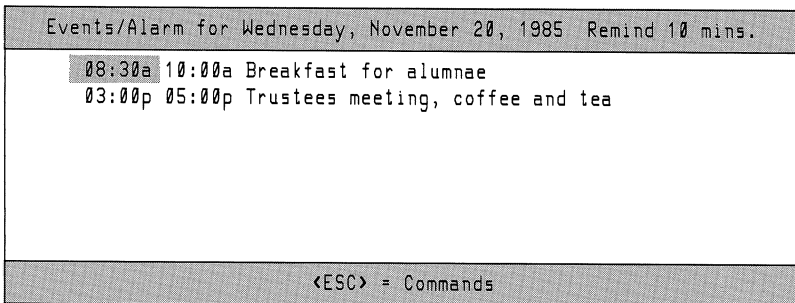


Figure 3.4

The top line of the screen identifies the day and date. At the far right, it displays the interval between the alarm and the scheduled time for the event.

The central display area lists in 3 columns the beginning and ending times and a brief description of each event. The display area has room for as many as 7 events at a time. Use the arrow keys to move the marker up and down the list.

When the marker reaches the bottom of the display area, additional events scroll upward into view until you reach the last event for the current date. Likewise, events scroll downward to let you return to the first event.

To move the marker laterally from column to column, press **[ESC]** and then **[→]** or **[ESC]** and then **[←]**

The bottom line is a command line. Press **[ESC]** to display the functions available to you in the Events/Alarm accessory.

```
2-Date 4-Time 5-Alarm 9-Delete 0-Add X-Cancel Q-Quit
```

To select a function after you press **[ESC]**, press the key associated with the function on the command line.

Adding or Updating an Event

The Events/Alarm screen displays events entered through your primary Calendar file as well as those you enter directly through the accessory. (Of course, those events, in turn, become a part of the primary Calendar file, `dmevents.cal`.) If there are no events for the current date in the file, a blank event line appears so that you can enter an event. Once you have data in the file, press **[ESC]**, then **[0]** when you want to add an event.

In the first 2 columns, enter beginning and ending times for each event. Type **p** to specify p.m. or **a** to specify a.m. New entries appear as morning (a.m.) events if you do not specify one or the other. If you press **[ENTER]** in each column without specifying times, the event appears at the top of the list as a *day event*.

In the last column, type a brief description of the event. Press **[ENTER]** to record the event and insert it in its proper (chronological) place in the list.

To update or revise an event, position the marker on the event you want to change. To change data in a column, type over the incorrect characters. Press **[ENTER]** to move to the next column. If you revise the beginning time for an event, it assumes its proper position in the list when you move the marker to another event line.

Setting the Alarm

If you want the DeskMate alarm system to alert you to the approach of a scheduled event, move the marker to the event line and press **[ESC]** and then **[5]**. The screen displays a star to the left of such events. Press **[ESC]** and then **[5]** a second time to cancel the alarm and remove the star.

The preset value for the alarm time is 10 minutes prior to the beginning time for an event. To change this interval between the

alarm and the event, press **[ESC]**, then **[4]** to use the Time function. The change applies to all events for which an alarm is set.

Type a number of minutes in the 2-digit space on the top line to specify the number of minutes you want the alarm to precede the event. Type **00** if you want the alarm to occur at exactly the beginning time for the event.

Changing the Date

Press **[ESC]** and then **[2]** to display the list of events scheduled for a date other than the current one. A monthly calendar appears in the center of the display area.

Move the marker from the current date on the calendar to the date you want to display. Up and down arrow keys move the marker a week at a time; left and right arrows move it day by day.

The monthly calendar for the next month or the previous month appears on the screen if you move the marker beyond the range of the current one. Press **[ESC]** followed by **[←]** or **[→]** to move the date indicator a month at a time.

Press **[ENTER]** to see the list of events for the date under the marker, or press **[ESC]**, then **[X]** to cancel the date change and return to the previous list. If you press **[ENTER]**, the new date and its list of events appear on the screen.

Deleting an Event

To delete an event from the screen, place the marker on the event that you want to delete, and press **[ESC]** and then **[9]**. The Delete function cancels the alarm for the event and removes it from the Events/Alarm screen.

Exiting Events/Alarm

When you finish using the Events/Alarm accessory, you can exit in either of 2 ways. Press **[ESC]**, then **[Q]** to return to the screen you left to use the accessory. The Quit function records all changes you made to the file. The primary Calendar file, `dmevents.cal`, reflects these additions and revisions.

Press **[ESC]** and then **[X]** to cancel all the additions and revisions you made to the file since you entered it. The following prompt appears:

Cancel? (Y/N)

Press **[Y]** to affirm that you want to cancel all changes; the screen you left to use Events/Alarm reappears. Press **[N]** if you decide not to exit via the Cancel function.

Messages

The Messages accessory is similar to the Mail application, though it lacks many of the functions of the complete application. The chief advantage of using the accessory is its convenience. When the top line alerts you to the arrival of a message, you can read the message and send a response without exiting the file in which you are working.

To select Messages from the menu of Desk Accessories, press **[M]** or move the marker to Messages and press **[ENTER]**. A Message window appears that lists all *new mail*. New mail is mail that has not yet been delivered from the system mailbox to your home mailbox. Figure 3.5 illustrates this Message screen and provides sample data.

From	Subject
jill	Tumbling lessons
jack	Dental work

<ESC> = Commands

Figure 3.5

If you have no new mail, the screen displays the words **No Mail** in the message area.

Reading a Message

To read a message, position the marker on the line that identifies it on the screen. Use the arrow keys to move the marker up and down the list. If you have more messages than the window can display at one time, additional events scroll into view as you move the marker to them. Press **[ESC]** followed by **[↑]** or **[↓]** to move the marker a page at a time.

Press **[ENTER]** to display the message that is currently highlighted. Press **[ENTER]** again to read any continuation of the message. When there is no further text in the message, pressing **[ENTER]** returns you to the inventory of new mail.

Creating a Message

Press **[ESC]** and then **[Q]** to use the Create function. The screen alters to enable you to compose your message. Begin by entering the user name for the intended recipient of the message. Either type the user name and press **[ENTER]** or press **[ESC]**, then **[1]** to select the name from a list of all current users.

If you press **[ESC]** and then **[1]** to execute the Users function, the screen displays a list of users arranged in a column. A second column displays the data in the optional comment field that appears during the creation procedure for new users. On a multi-user setup, this comment area often contains a full name for each of the (often abbreviated) user names.

Using the arrow keys, move the marker up or down the list until it rests on a name you want to select. Press **[ENTER]** to make your selection. When the marker reaches the last line displayed in the box, the list scrolls upward until it shows the last user name. Likewise, the list scrolls downward as you move the marker back to the first name in the list.

Each name you choose from the list of user names appears in the heading of your message. Within the space provided in the heading, you can select a number of users or any special user groups that the user list recognizes.

When you are finished with the Users function, press **[ESC]** and then **[Q]**. The cursor returns to the region of the Message screen that it occupied formerly. Press **[ENTER]** to move to the next item in the heading.

In response to the second item in the heading, describe the subject of your message. This brief description identifies the message

on the recipient's Mail and Message screens. Press **ENTER** to move to the message area.

Type your message in the space below the heading. The message area consists of 15 lines, each containing 40 characters. Words that overrun the right margin wrap to the next line as you type.

End your message in either of 2 ways. To quit the message and send it, press **ESC**, then **Q**. The list of new mail reappears. To cancel the message and return to the mail list, press **ESC** and then **X**.

Exiting Messages

To quit the Messages accessory, press **ESC** and then **Q**. The accessory transfers its contents to your primary mailbox, `dmbox.msg`. The screen redisplay the screen you left to execute the accessory.

Phone Directory

Think of the Phone Directory as a replacement for that revolving set of filecards on your desktop. Use it to record or look up phone numbers quickly and easily. You can expand each listing to include 4 lines of additional information—addresses, account numbers, or general notes.

To select the Phone Directory from the menu of Desk Accessories, press **P** or move the marker to Phone Directory and press **ENTER**.

The Phone Directory listings, simulated in Figure 3.6, appear on the screen. Use this screen for locating and entering information in the Phone Directory.

Name	Phone	A-B C-D E-F G-H I-J K-L M-N O-P Q-R S-T U-V W-X Y-Z
Johnson, Paul	555-9900	
Jones Hardware Supply	312 555-3322	I-J
June's Camera Outlet	555-3302	
LaFrance Bakery	555-2200	
Petta Linen Service	555-1198	
Prensa Graphics	555-8191	
<ESC> = Commands		

Figure 3.6

Figure 3.6 contains sample data to show the arrangement of information in the Phone Directory window.

Finding Information

Your Phone Directory sorts entries into alphabetical order. The arrow keys move the marker up and down the list. When the marker reaches the top or bottom of the display area, additional entries scroll onto the screen.

The list is continuous: the first name in the list reappears when you scroll beyond the last entry. Entries that begin with non-alphabetic characters (such as 1-2-3 Cleaners) come after the Z entries (and before the A entries).

To find an entry rapidly, press the first letter of the entry. The cursor tabs to the first entry that begins with that letter. The letters arranged in a column on the right margin of the window are like tabs among your file cards. A rectangular marker indicates the initial letter of the current entry.

To proceed to the next group of 6 entries (page by page), press **[ESC]** and then **[↓]**. Press **[ESC]** and then **[↑]** to display the preceding 6 entries.

Name		Phone	A-B
			C-D
Johnson, Paul		555-9900	E-F
			G-H
Jones Hardware Supply		312 555-3322	I-J
			K-L
		555-3302	M-N
			O-P
LaFrance Bakery		555-2200	Q-R
			S-T
Fran--manager; allow 3 days		555-1198	U-V
for cake orders			W-X
Open til 2 on Saturdays		555-8191	Y-Z
<ESC> = Commands			

Figure 3.7

When you place the marker on an entry, it highlights the name and phone number. To see more information, press **ENTER**. The Phone Directory “pulls out” the card, revealing a 4-line comment area on each card. Press **ESC**, then **Q** (or **CTRL C**) to “replace” the card.

Adding an Entry

To add an entry to your Phone Directory, press **ESC**, then **0**. A blank file card appears on the screen with the marker on the first item. In this box, type a name with a maximum of 30 characters. Type the last name first so that the entry can be sorted properly.

Press **ENTER** to move the marker to the next field, the phone number. The field for the telephone number contains 12 spaces to allow room for the area code and the local number. See the examples in Figure 3.7.

Press **ENTER** again to move the marker to the comment field, below the name and number. Use the 4 lines in the comment field for general information such as that on the sample card in Figure 3.7.

When you finish typing the entry, press **ESC** and then **Q** to place the new card in your Phone Directory. The directory displays the new entry on the first line of the window in its proper alphabetical position.

Note: The first few entries you make in your Phone Directory may appear to be incorrectly sorted. Because the list is continuous, later entries seem to precede earlier ones. To reassure yourself that the order is correct, press **[A]** to tab to the beginning of the list and display it.

To make a series of new entries, press **[ESC]** followed by **[Q]** when you finish typing a card. In this way, you can add the card you typed and display a blank one using a single command. Press **[ESC]** and then **[Q]** after you type the last new entry. (If you accidentally press **[Q]** rather than **[Q]** after the last new card, press **[CTRL] [C]** to avoid entering a blank card in your file.)

Editing or Deleting an Entry

To change information in an entry, move the marker to the entry, and press **[ENTER]**. Position the cursor on the data you want to change. Pressing **[ESC]** followed by **[+]** or **[-]** moves the marker to the next data area or to the preceding one.

Enter the correct data, typing over any characters you need to replace. You can also use **[CTRL] [W]** to insert or **[CTRL] [X]** to delete a character.

Press **[ESC]** and then **[Q]** to store the edited form of the data card. Press **[CTRL] [C]** before storing the edited card to cancel the revision.

To delete an entry, move the marker to the entry you want to remove and press **[ESC]** and then **[9]**. The marked entry disappears from the screen.

Printing Information

To print the information in your Phone Directory, press **[ESC]**, then **[P]**. Press **[ENTER]** at each of the printer settings or make changes as needed. When you are satisfied with the settings on the screen, press **[ESC]** and then **[Q]** to start printing.

If the cursor is in the directory when you choose to print, the printed copy consists of names and telephone numbers only. If, however, you press **[ENTER]** to display an entire card and then select the Print command, the printed copy includes the comment data for each card. In either case, the printed directory includes all entries, alphabetically arranged.

Exiting the Phone Directory

To exit the Phone Directory, press **[ESC]** and then **[Q]**. The accessory stores any changes or additions to the data and returns you to the background screen, the menu or application you left to use the Desk Accessories. To exit and cancel any changes you have made in the directory, press **[ESC]** and then **[X]**.

Scratchpad

Accessible from any application, the Scratchpad accessory is a mini-text file, ideal for quick notes and reminders. Its pages are designed to be instantly readable, each one fully displayed on the screen without scrolling.

To choose Scratchpad from the menu of accessories, press **[S]** or move the marker to the word *Scratchpad* in the list, and press **[ENTER]**. The Scratchpad window, such as that shown in Figure 3.8, appears. The last line in the figure, the command line, appears on your screen when you press **[ESC]**.

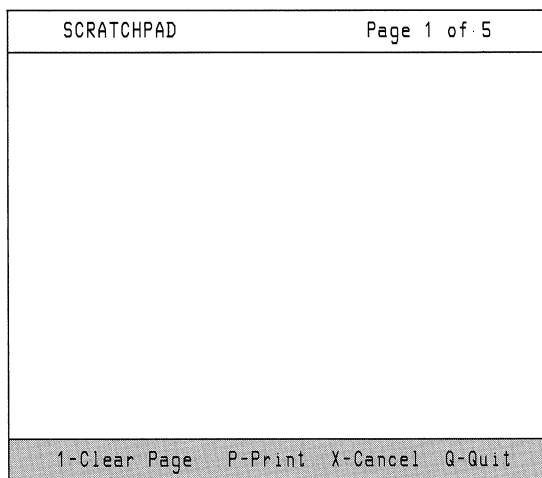


Figure 3.8

The top of the screen identifies the page number. You can enter text on as many as 5 pages. The text area on each page consists of 15 lines of 40 characters.

Type notes anywhere in the space provided. The text you enter overwrites any existing characters, and words wrap to the next line if they overrun the right margin. Likewise, when the text

you are typing reaches the end of a page, Scratchpad proceeds directly to the next page.

Using the arrow keys, you can move the cursor to any position on the screen without erasing data. Pressing **[ESC]** followed by either **[↑]** or **[↓]** moves the cursor to the top or bottom of the page. If the cursor is on the top line, pressing **[↑]** moves the cursor to the bottom line of the preceding page. Similarly, pressing **[↓]** moves the cursor from the bottom line to the top of the next page.

To edit, you can press **[CTRL]** **[W]** to insert or **[CTRL]** **[X]** to delete a character. Also, the space bar and **[BACKSPACE]** key erase characters. Press **[ESC]**, then **[1]** to clear, or erase, the current page of text.

Press **[ESC]** and then **[P]** to print the entire Scratchpad. A series of blank lines on a page collapses to 2 linefeeds in the printed copy. The accessory prints successive pages without a break. When the printing stops the cursor returns to the position at which you executed the Print command.

Press **[ESC]** and then **[Q]** from any page to return to the background screen, the application or menu you left to execute an accessory. Press **[ESC]** and then **[X]** to exit the Scratchpad and cancel changes made to the file.

XENIX Command

Use the XENIX Command accessory to execute a XENIX system command. The accessory enables you to use system commands without having to exit and then reopen DeskMate.

Select the accessory from the menu of Desk Accessories by pressing **[X]** or by positioning the marker on XENIX Command and pressing **[ENTER]**.

The following prompt appears on the screen along with an identification of the current directory:

```
Enter XENIX Command: (/usr/yourhome)
```

Type any valid XENIX command. Then, press **ENTER** to execute the command or **CTRL C** to cancel it and return to the previous screen. The system executes the command in the directory identified. This directory might not correspond to the directory you were using when you selected a Desk Accessory.

After the system acts on your command, the following prompt appears:

Press any key to continue

Press any key to redisplay the menu or application you left when you chose Desk Accessories.

TEXT

The Text application is an easy to use, yet powerful text editor program. Use Text to prepare everything from quick memos to letters, articles, and reports.

Text functions allow you to rearrange, delete, and insert text, as well as change the format of your document. You can print documents, combine documents, and save all or a portion of a document to the disk.

Using Text

To create a document, open a new Text file from the Main Menu. Begin by positioning the marker on `Text` in the application line. Press `ENTER` to load the application without specifying a file. Text displays a prompt at the bottom of the screen:

Enter filename:

Type a new filename, and press `ENTER`. If you do not type the extension to the filename, `.doc`, Text assigns it automatically.

Note: You can open a document file without specifying a filename by merely pressing `ENTER` at the prompt. However, when you exit the file, Text does not save its contents. To avoid losing data in such a case, you can merge the unnamed file to another file (whose name—new or existing—you specify).

The names of existing document files appear on the Main Menu in the column below `Text`. To open an existing file, move the marker to the application name. Then, indicate the name of the file in either of the following ways:

- Press `ENTER` to load the application, and then enter the filename when the prompt, `Enter filename:`, appears at the bottom of your screen.
- Use the arrow keys to position the marker on the filename, and press `ENTER`. (If you have a long list of files, you may discover that the Find function saves you time. The Find function is described at a later point in this chapter.)

The first line of the Text screen identifies the current application and filename, the date, and the time. It also reminds you that pressing **[ESC]** displays the command lines at the bottom of the screen. Normally, however, the command lines are not displayed, so that the additional space can be devoted to your document. This chapter includes detailed instructions for using the Text functions.

Type the text of your document on the screen. The Add/Replace function lets you switch back and forth between insert and over-strike typing modes. Words wrap to the next line when you reach the righthand margin. (Use the Format function to reposition the right margin.)

After you fill the available text area on the screen, additional lines scroll upward to let you continue. To see a line after it has scrolled off the screen, use the marker movement keys as described in the marker movement section of this chapter.

The Text application stores a fixed number of lines per page, the same number of lines that the printer is set to print on a page. You can check this value by pressing **[ESC]** and then **[P]** to display the printer settings. Note the value opposite *Printed lines per page*. Press **[CTRL]** **[C]** to return to your document.

To end a page in your document before the fixed page break, type **.N** **[ENTER]** on a line by itself. Be sure to type a capital (uppercase) N. The characters signal the printer to start a new page, but they do not appear on the printed copy.

The Help Screens

The Text help screens contain brief summaries of the functions and the procedure for using them. Within the Text application, press **[ESC]** and then **[?]** to see the first help screen.

To see the next help screen, press **[ENTER]**. Press **[CTRL]** **[C]** to return to the Text screen.

Marker Movement

Use the arrow keys to move the marker a character or line at a time. Pressing other keys or key sequences moves the marker more rapidly. Refer to Figure 4.1 for exact marker movement.

Marker Movement

Key	Moves the Marker
	1 character to the right
	1 character to the left
	1 line up in the current column
	1 line down in the current column
 	to the last character in the current line
 	to the first character in the current line
 	to the top of the screen in the current column, or to the top of the previous screen if already at the top
 	to the bottom of the screen in the current column, or to the bottom of the next screen if already at the bottom
 	to the beginning of the document

Figure 4.1

The Text Functions

The Text functions let you manipulate the text within your document and from document to document. They appear on the command lines when you press , as shown below, along with the general DeskMate commands. The general DeskMate commands, available in any DeskMate application, are described in Chapter 2, “The Main Menu.” This section deals only with functions unique to Text.

```
1-Find 2-Subst 3-Add 4-Format 5-Buffer 6-Merge 7-Select 8-Copy 9-Delete 0-Insert  
<F> Help <P> Print <X> Cancel <Q> Quit <=> Desk Accessories
```

To select a function, press **[ESC]** followed by the number key corresponding to the function you want to use. Do not hold down **[ESC]** while you press the command key.

Find

Select the Find function to search for and find a string (sequence of characters) of as many as 30 characters. The following prompt appears at the bottom of the screen:

Search string:

Type the string you want the cursor to find, and press **[ENTER]**. The Find function ignores uppercase and lowercase. For example, `STRING` and `string` are recognized as equal. The function searches for the first occurrence of the string beginning at line 1 of the document.

If the string is found, the line containing the string appears at the top of the screen with the cursor on the first character of the string. To find the next occurrence of the string, press **[ESC]**, then **[1]** again, and press **[ENTER]** to use the same search string.

If the search string does not occur, or if the function has located all occurrences already, the cursor returns to the beginning of the document.

Substitute

The Substitute function not only finds a string, but also replaces it with a character string that you specify. Press **[ESC]** and then **[2]** to select the function. The bottom line of the screen shows:

Search string:

Enter the string you wish to find and replace. Next, the screen shows:

Replacement string:

Enter the string you wish to substitute. The Substitute function finds the first occurrence of the string in the document. The bottom of the screen shows:

Replace? (Y/N)

Press **[Y]** to replace the marked occurrence of the string. Press **[N]** to skip an occurrence that you do not wish to replace. After you respond to the prompt, the function finds the next occurrence of the search string. Press **[CTRL] [C]** at any time to cancel any further substitutions.

Add/Replace

Press **[ESC]** and then **[3]** to switch the typing mode between Add and Replace. When you change the mode, the command line changes so that it always identifies the current mode. Whenever you open a file, the initial mode is Add mode.

The selection of mode determines the effect of typing a character when the cursor is already on a character. This occurs frequently when you edit your text.

In Add mode, each character you type is inserted (added) at the cursor, and existing text shifts to the right a space for every character inserted.

In Replace (overstrike) mode, each character you type overstrikes the character under the cursor. The text is not moved. Note that you cannot replace a carriage return. Use the arrow key to skip a carriage return, or use **[CTRL] [X]** to delete it.

The effect of pressing **[BACKSPACE]** is also different in the 2 modes. In Add mode, **[BACKSPACE]** deletes the character preceding the cursor and closes up the text. In Replace mode, **[BACKSPACE]** moves the cursor to the preceding position and replaces the existing character with a blank space.

Format

The Format function enables you to specify the number of characters to display on each line of your text. You can vary the screen width from 21 to 78 characters.

When you adjust the printer settings, you can choose a **printed** line width different from the screen width. However, if you match the screen format to the expected width of your printed

document, you have the advantage of seeing your document on the screen as it will appear when printed.

Press **[ESC]**, then **[4]** to select the Format function. The following prompt appears:

```
Line Width = 78
```

In place of the current value, enter the number of characters you want to appear across each line on the screen. The left margin does not change; the right margin adjusts to the new format. After you press **[ENTER]**, the text in your document adjusts to the newly specified format. Each time you save and reload the document, it retains the latest format change.

Buffer

The Buffer function lets you duplicate a block of text in a separate region of memory called the *copy buffer*; you can then insert this copy somewhere else in your document. The Buffer function operates only after you select a text block using the Select function (described in an upcoming section of this chapter).

Press **[ESC]** and then **[5]** to duplicate all selected text into the copy buffer. The Buffer function does not erase the selected text block. Then, to insert the contents of the copy buffer at another location, move the marker to the appropriate position, and press **[ESC]**, then **[0]** to use the Insert function. (See the explanation of the Insert function for details.)

The buffer retains its selected contents until you either exit your document or use the Buffer function with a new block of text. This means, of course, that you cannot use the Buffer function to insert selected text from one document into another. Instead, use the Copy and Merge functions: first, copy the selected block of text to a temporary file, and then use the Merge function to load it into the destination file.

Merge

Press **[ESC]** and then **[6]** to merge (combine) a copy of another document with the document on which you are currently working. The following prompt appears:

```
Enter merge filename:
```


Enter the name of the document file that you want to introduce into your document, and press **[ENTER]**. If the file is not in the current directory, enter the complete pathname. The function checks the length of the specified file, and, if there is enough room in the working document, inserts the specified file at the current marker position.

If there is not enough room in your document to merge the entire file you specified, the Merge command is canceled. The screen displays the following message:

Not enough memory **[ENTER]** to continue

Press **[ENTER]** to return to your document.

Select

Use Select to define a word or block of text in order to perform some other operation on it. You might, for example, want to insert a sentence or paragraph elsewhere in your document, delete a passage, or copy a portion of a document into a separate file.

Using the marker movement keys or the Find function, position the marker on the first character you want to select. Press **[ESC]**, then **[7]**. Then, use the marker movement keys to expand the highlighted area.

All highlighted text between the first and current marker positions is selected. You can increase or decrease the amount of selected text, using the marker movement keys, until you are satisfied.

After you select your text, use another command with the block of text—Buffer, Delete, Print, or Copy. (To insert the block at another point in your document, first use the Buffer function to save it to your copy buffer.)

Press **[ESC]** and then **[7]** if you decide not to use the text you have selected. If you use any other Text operation except Find or exit the Text application, you cancel the text selection.

Copy

Press **[ESC]** and then **[8]** to create a copy of your document or a selected portion of it to a Text (ASCII) file. The following prompt appears:

Enter copy filename:

Enter the name of the file to which you wish to save this document, and press **[ENTER]**. If you press **[ENTER]** without entering a filename, the Copy function supplies the current document name as the copy filename and copies the file to the disk.

Delete

Press **[ESC]** and then **[9]** to delete the character under the cursor. The Delete function eliminates the character and closes the remaining text. If you first select a block of text, the Delete function deletes the entire block and closes the remaining text. You can also use the key sequence **[CTRL] [X]** in place of the Delete function to delete text.

Insert

The Insert function lets you insert a block of text into your document. First, select the block and use the Buffer function to duplicate the selected text in the copy buffer. Then, move the marker to the point in the document at which you want to insert the text block. Press **[ESC]** and then **[0]** to insert the contents of the copy buffer at the current marker position.

The buffer retains the text it contains even after you use the Insert function. Use the function again to insert the buffer contents at any point in the document.

You can also insert text by positioning the cursor and then typing in Add mode. Press **[ESC]**, followed by **[3]** to switch between Add and Replace (Rpl) modes.

Printing Documents

The Print function lets you print all or part of a document. If you want to print only a part of your document, begin by selecting text using the Select function.

When you are ready to print (either the whole document or a selected part), press **[ESC]**, then **[P]**. The screen displays a set of instructions to the printer that define the format for your printed document.

Change any settings as required for the current document. Chapter 1 includes an explanation of each item. Be sure that your printer is properly connected and online, and then press **[ESC]** and then **[Q]** to begin printing. To cancel the print command before you actually start to print, press **[CTRL]** **[C]**.

Exiting Text

There are 2 ways to exit your document. One way saves the current contents of the document (complete with newly entered changes); the other does not.

Press **[ESC]** and then **[Q]** to exit and save the document, complete with all changes you have made to an existing document. DeskMate returns you to the previous level of operation—the Main Menu or the system prompt.

Press **[ESC]**, then **[X]** to exit the file and cancel any changes you have made. The following prompt appears:

Cancel Edit? (Y/N)

Press **[Y]** to disregard all changes you made to the document since opening it. The Cancel command saves the pre-edited form of the file. If you want to keep any of your revisions, press **[N]** to return to the document.

