COMP 7940 Lab 4

Tang Shuyang 25441728

1. When we run the Telegram bot directly in the terminal (e.g., python3 bot.py), the process is tied to that shell session. Closing the terminal or disconnecting SSH sends a signup signal, which terminates the bot process. To keep it running, use tools like nohup screen, or tmuxto detach the process from the terminal session.

2. The .pemfile is a private key that serves as the sole credential for SSH access to theEC2 instance. If compromised, anyone with the file can gain full control of the instance, leading to data theft, unauthorized resource use, or malicious activity. AWS does not store the private key and losing it may prevent SSH access. Best practices include restricting file permissions, never sharing it publicly, and using AWS KMS or Secrets Manager for production environments.
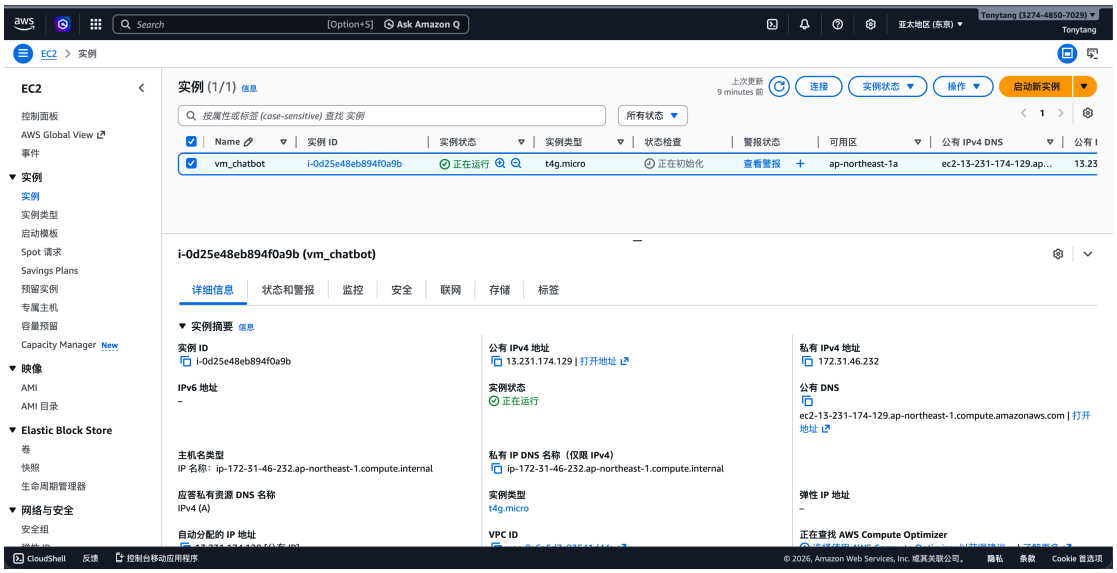
3.