

Thunder Client interface showing a POST request to `http://localhost:3000/api/v1/products/create`. The request body is a JSON object: `{ "name": "Teclado", "price": 1200, "stock": 15, "description": "RGB" }`. The response status is 201 Created, with a message: `"Product created successfully", "id": 2`.

Terminal output:

```
> api-products@1.0.0 dev
> nodemon --watch src --ext ts --exec tsx src/app.ts

[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): src/**/*
[nodemon] watching extensions: ts
[nodemon] starting `tsx src/app.ts`
◊ injected env (5) from .env
◊ injected env (0) from .env
Server running on port 3000
[nodemon] clean exit - waiting for changes before restart
```



Thunder Client interface showing a GET request to `http://localhost:3000/api/v1/products/getAll`. The response status is 200 OK, with a JSON array of product details:

```
[
  {
    "id": 2,
    "name": "Teclado",
    "price": "1200.00",
    "stock": 15,
    "description": "RGB",
    "brand": null,
    "img": null,
    "active": 1
  }
]
```

Terminal output:

```
> api-products@1.0.0 dev
> nodemon --watch src --ext ts --exec tsx src/app.ts

[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): src/**/*
[nodemon] watching extensions: ts
[nodemon] starting `tsx src/app.ts`
◊ injected env (5) from .env
◊ injected env (0) from .env
Server running on port 3000
[nodemon] clean exit - waiting for changes before restart
```

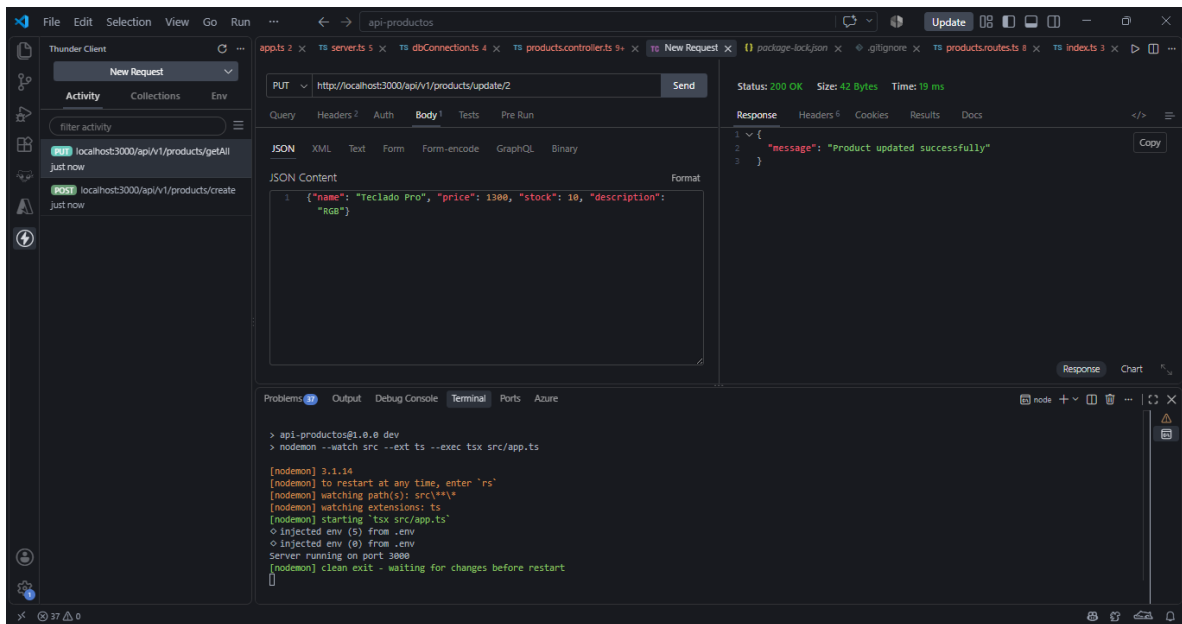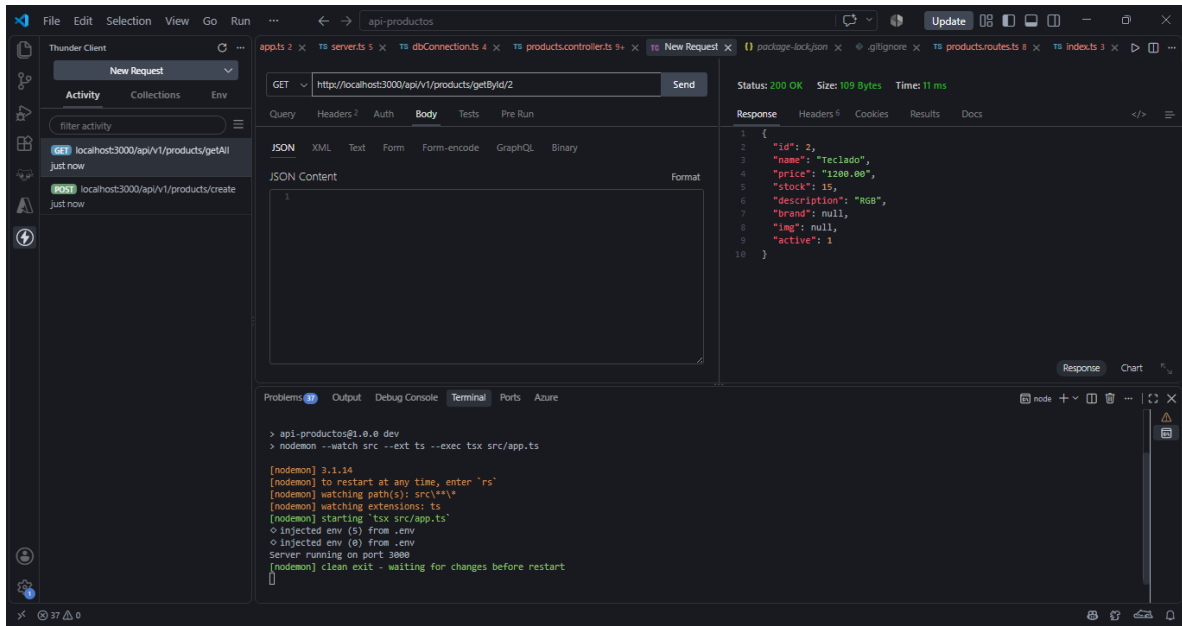

Thunder Client interface showing a PATCH request to `http://localhost:3000/api/v1/products/change-price/2`. The request body is `{ "price": 678.99 }`. The response is `{ "message": "Price updated successfully" }` with status 200 OK.

Terminal output:

```
> api-products@1.0.0 dev
> nodemon --watch src --ext ts --exec tsx src/app.ts

[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): src/**/*
[nodemon] watching extensions: ts
[nodemon] starting `tsx src/app.ts`
◊ injected env (5) from .env
◊ injected env (6) from .env
Server running on port 3000
[nodemon] clean exit - waiting for changes before restart
```

Thunder Client interface showing a DELETE request to `http://localhost:3000/api/v1/products/delete/2`. The response is `{ "message": "Product logically deleted" }` with status 200 OK.

Terminal output:

```
> api-products@1.0.0 dev
> nodemon --watch src --ext ts --exec tsx src/app.ts

[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): src/**/*
[nodemon] watching extensions: ts
[nodemon] starting `tsx src/app.ts`
◊ injected env (5) from .env
◊ injected env (6) from .env
Server running on port 3000
[nodemon] clean exit - waiting for changes before restart
```

