

# **20MCA132-OBJECT ORIENTED PROGRAMMING LAB RECORD**

**TANIA MARGRET SEBASTIAN**

**ROLL NO : 33**

**S2-REG-MCA-B**

**TABLE OF CONTENTS**

<b>EXP NO.</b>	<b>EXPERIMENT</b>	<b>PAGE NO.</b>
<b>1</b>	<b>Create 3 objects of the class</b>	<b>1</b>
<b>2</b>	<b>matrix addition</b>	<b>3</b>
<b>3</b>	<b>Add complex numbers</b>	<b>6</b>
<b>4</b>	<b>Read a matrix and check whether it is symmetric or not</b>	<b>8</b>
<b>5</b>	<b>Program to Sort strings</b>	<b>11</b>
<b>6</b>	<b>Search an element in an array</b>	<b>13</b>
<b>7</b>	<b>Perform string manipulations</b>	<b>16</b>
<b>8</b>	<b>Program using Array of Objects</b>	<b>17</b>
<b>9</b>	<b>Area of different shapes using overloaded functions</b>	<b>20</b>
<b>10</b>	<b>Use array of objects to display details of N teachers</b>	<b>22</b>
<b>11</b>	<b>Use array of objects to display details of N teachers</b>	<b>26</b>
<b>12</b>	<b>Program to read and print book information using inheritance</b>	<b>30</b>
<b>13</b>	<b>Multiple inheritance using interface</b>	<b>34</b>
<b>14</b>	<b>Create a menu driven program to find area and perimeter of objects using interface</b>	<b>36</b>
<b>15</b>	<b>Program to calculate method from interface</b>	<b>40</b>
<b>16</b>	<b>Create a graphic package and test it</b>	<b>43</b>
<b>17</b>	<b>Create an arithmetic package and test it</b>	<b>47</b>
<b>18</b>	<b>Write a user defined exception class to authenticate the user name and password</b>	<b>50</b>
<b>19</b>	<b>Find average of n positive integer and raise exception for each negative integer</b>	<b>53</b>

<b>20</b>	<b>Arithmetic operation using thread</b>	<b>56</b>
<b>21</b>	<b>Fibonacci series and even numbers using thread</b>	<b>59</b>
<b>22</b>	<b>Program to draw Circle, Rectangle, Line in Applet</b>	<b>61</b>
<b>23</b>	<b>Program to find maximum of three numbers using AWT.</b>	<b>64</b>
<b>24</b>	<b>Display happy face and sad face using applet based on marks secured</b>	<b>67</b>
<b>25</b>	<b>Program using Mouse event</b>	<b>73</b>
<b>26</b>	<b>Implement a simple calculator using AWT components.</b>	<b>77</b>
<b>27</b>	<b>Draw shapes for given parameters as per user's choice</b>	<b>81</b>
<b>28</b>	<b>Develop a program to handle all window events</b>	<b>85</b>
<b>29</b>	<b>Develop a program to handle all mouse events</b>	<b>87</b>
<b>30</b>	<b>Develop a program to handle Key events</b>	<b>89</b>
<b>31</b>	<b>Producer/Consumer using ITC</b>	<b>91</b>
<b>32</b>	<b>Program to create a generic stack and do the Push and Pop operations.</b>	<b>95</b>
<b>33</b>	<b>Using generic method perform Bubble sort</b>	<b>99</b>
<b>34</b>	<b>Program to demonstrate the creation of queue object using the PriorityQueue class</b>	<b>101</b>
<b>35</b>	<b>Program to remove all the elements from a linked list</b>	<b>103</b>
<b>36</b>	<b>program to demonstrate the addition and deletion of elements in dequeue</b>	<b>104</b>
<b>37</b>	<b>list of Strings using ArrayList from collection framework, perform built-in operations.</b>	<b>106</b>
<b>38</b>	<b>Program to demonstrate the working of map interface by adding ,removing,changing.</b>	<b>107</b>
<b>39</b>	<b>program to convert hash map to tree map.</b>	<b>108</b>
<b>40</b>	<b>Program list subdirectory and files , perform search operation</b>	<b>110</b>
<b>41</b>	<b>Program to write content to a file and display it on the console</b>	<b>112</b>

**1. Define a class 'product' with data members pcode, pname and price. Create 3 objects of the class and find the product having the lowest price.**

```
import java.util.*;

public class Product {

    int pcode;

    String pname;

    int price;

    public static void main(String[] args) {

        int smallest;

        Product p1 = new Product();

        Product p2 = new Product();

        Product p3 = new Product();

        p1.pcode=1001;

        p1.pname="RAM";

        p1.price=7000;

        p2.pcode=1002;

        p2.pname="Processor";

        p2.price=37000;

        p3.pcode=1003;

        p3.pname="SSD";

        p3.price=16700;


        if(p1.price<p2.price) {

            if(p3.price<p1.price) {

                smallest = p3.price;
```

```
        System.out.println(p3.pname+ " is the cheapest.");
    } else {
        smallest = p1.price;
        System.out.println(p1.pname+ " is the cheapest.");
    }
} else {
    if(p2.price<p3.price) {
        smallest = p2.price;
        System.out.println(p2.pname+ " is the cheapest.");
    } else {
        smallest = p3.price;
        System.out.println(p3.pname+ " is the cheapest.");
    }
}
}
}
```

## OUTPUT

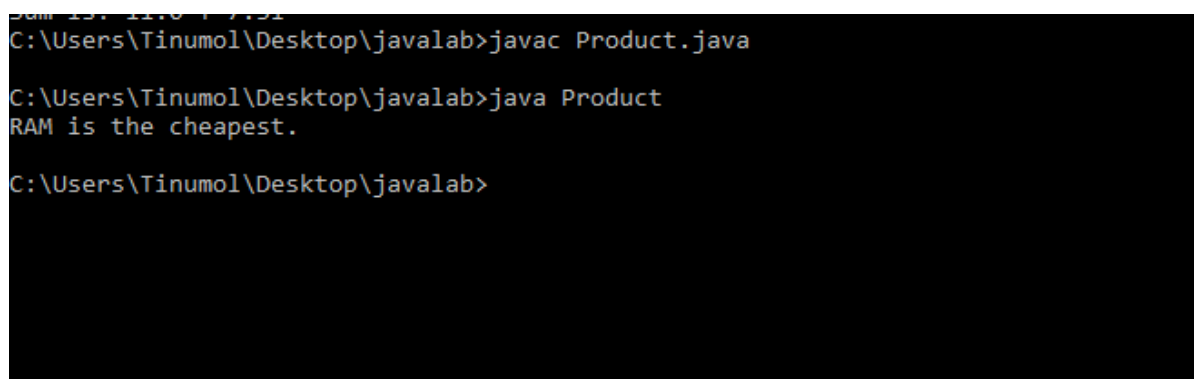

```
C:\Users\Tinumol\Desktop\javalab>javac Product.java
C:\Users\Tinumol\Desktop\javalab>java Product
RAM is the cheapest.
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

## 2. Read 2 matrices from the console and perform matrix addition.

```
import java.util.*;

class matrixadd{

public static void main(String[] args)

{

int row,col,i,j;

Scanner sc=new Scanner(System.in);

System.out.print("enter the no of rows:");

row=sc.nextInt();

System.out.print("enter the no of columns:");

col=sc.nextInt();

int mat1[][]=new int[row][col];

int mat2[][]=new int[row][col];

int mat3[][]=new int[row][col];

System.out.print("enter the elements of matrix1 :");

for(i=0;i<row;i++)

{

for(j=0;j<col;j++)

{

mat1[i][j]=sc.nextInt();

}


}

System.out.println();
```

```
}  
  
System.out.print("enter the elements of matrix2 :");  
  
for(i=0;i<row;i++)  
{  
    for(j=0;j<col;j++)  
    {  
        mat2[i][j]=sc.nextInt();  
    }  
    System.out.println();  
}  
  
for(i=0;i<row;i++)  
{  
    for(j=0;j<col;j++)  
    {  
        mat3[i][j]=mat1[i][j]+mat2[i][j];  
    }  
}  
  
System.out.print("sum of matrix :");  
  
for(i=0;i<row;i++)  
{  
    for(j=0;j<col;j++)  
    {  
        System.out.print(mat3[i][j]+"\\t");  
    }  
}
```

```
}  
  
System.out.println();  
  
}  
  
}  
  
}
```

## OUTPUT

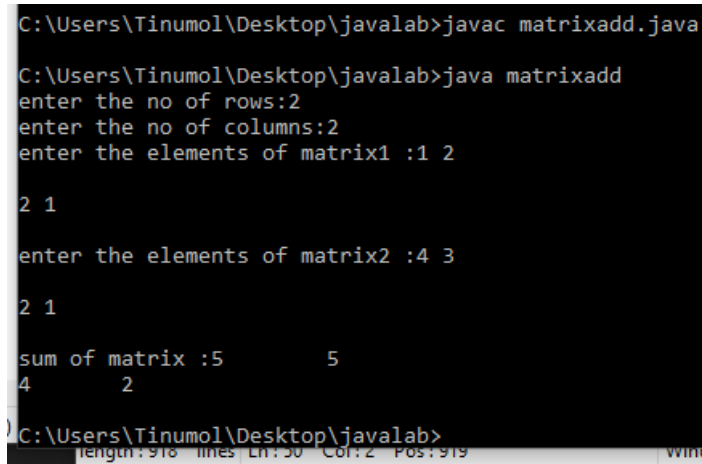

```
C:\Users\Tinumol\Desktop\javalab>javac matrixadd.java  
  
C:\Users\Tinumol\Desktop\javalab>java matrixadd  
enter the no of rows:2  
enter the no of columns:2  
enter the elements of matrix1 :1 2  
  
2 1  
  
enter the elements of matrix2 :4 3  
  
2 1  
  
sum of matrix :5      5  
4      2
```


**RESULT :** The program has been executed and the output was verified.



### 3. Add complex numbers

```
public class Complex{  
    double a, b;  
  
    Complex(double r, double i){  
  
        this.a = r;  
  
        this.b = i;  
  
    }  
  
    public static Complex sum(Complex c1, Complex c2)  
  
    {  
  
        Complex temp = new Complex(0, 0);  
  
  
  
        temp.a = c1.a + c2.a;  
  
        temp.b = c1.b+ c2.b;  
  
        return temp;  
  
    }  
  
    public static void main(String args[]) {  
  
        Complex c1 = new Complex(5, 4);  
  
        Complex c2 = new Complex(6, 3.5);  
  
        Complex temp = sum(c1, c2);  
  
        System.out.printf("Sum is: "+ temp.a+" + "+ temp.b +"i");  
  
    }  
  
}
```

## OUTPUT

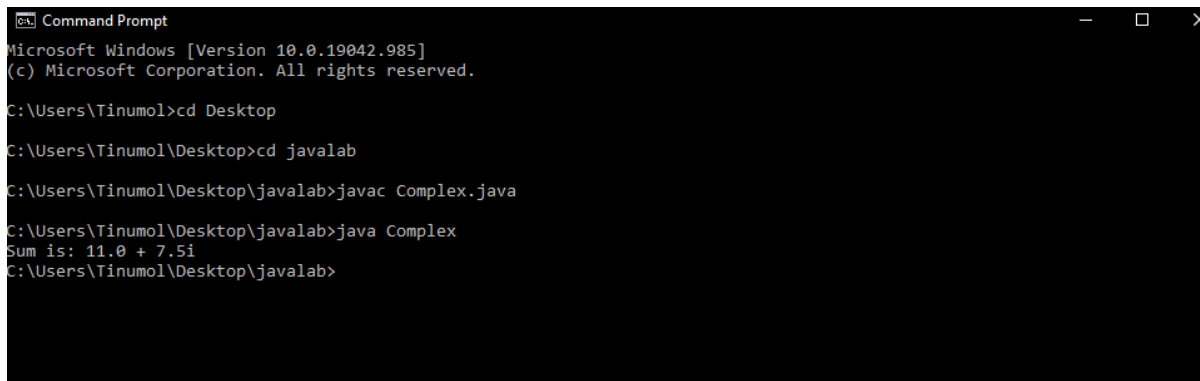

```
Command Prompt
Microsoft Windows [Version 10.0.19042.985]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Tinamol>cd Desktop
C:\Users\Tinamol\Desktop>cd javalab
C:\Users\Tinamol\Desktop\javalab>javac Complex.java
C:\Users\Tinamol\Desktop\javalab>java Complex
Sum is: 11.0 + 7.5i
C:\Users\Tinamol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

**4. Read a matrix from the console and check whether it is symmetric or not.**

```
import java.util.Scanner;

public class Symmetric
{
    public static void main(String[] args)
    {
        Scanner sc = new Scanner(System.in);

        System.out.println("Enter the no. of rows : ");

        int rows = sc.nextInt();

        System.out.println("Enter the no. of columns : ");

        int cols = sc.nextInt();

        int matrix[][] = new int[rows][cols];

        System.out.println("Enter the elements :");

        for (int i = 0; i < rows; i++)
        {
            for (int j = 0; j < cols; j++)
            {
                matrix[i][j] = sc.nextInt();
            }
        }


        System.out.println("Printing the input matrix :");

        for (int i = 0; i < rows; i++)
        {
```

```
    for (int j = 0; j < cols; j++)
    {
        System.out.print(matrix[i][j]+"\\t");
    }
    System.out.println();
}
if(rows != cols)
{
    System.out.println("The given matrix is not a square matrix, so it can't be symmetric.");
}
else
{
    boolean symmetric = true;
    for (int i = 0; i < rows; i++)
    {
        for (int j = 0; j < cols; j++)
        {
            if(matrix[i][j] != matrix[j][i])
            {
                symmetric = false;
                break;
            }
        }
    }
    if(symmetric)
    {
        System.out.println("The given matrix is symmetric...");
    }
    else
```

```
{  
    System.out.println("The given matrix is not symmetric...");  
} } sc.close();  
}
```

## OUTPUT

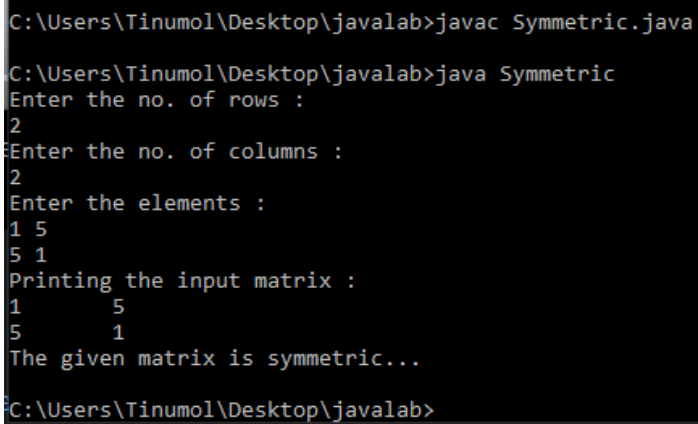

```
C:\Users\Tinumol\Desktop\javalab>javac Symmetric.java  
C:\Users\Tinumol\Desktop\javalab>java Symmetric  
Enter the no. of rows :  
2  
Enter the no. of columns :  
2  
Enter the elements :  
1 5  
5 1  
Printing the input matrix :  
1      5  
5      1  
The given matrix is symmetric...  
C:\Users\Tinumol\Desktop\javalab>
```


**RESULT :** The program has been executed and the output was verified.

## 5.Program to Sort strings

```
public class sortstring{  
    public static void main(String[] args)  
    {  
        String names[]={ "amal", "jyothi", "college", "of", "engineering" };  
        String temp;  
        int n= names.length;  
        int i;  
        int j;  
        for(i=0;i<n;i++)  
        {  
            for(j=i+1;j<n;j++)  
            {  
                if(names[i].compareTo(names[j])>0)  
                {  
                    temp=names[i];  
                    names[i]=names[j];  
                    names[j]=temp;  
                }  
            }  
        }  
        System.out.println("the sorted array of string is :");  
        for(i=0;i<n;i++)
```

```
{  
  
    System.out.println(names[i]);  
  
}  
  
}  
  
}
```

## OUTPUT

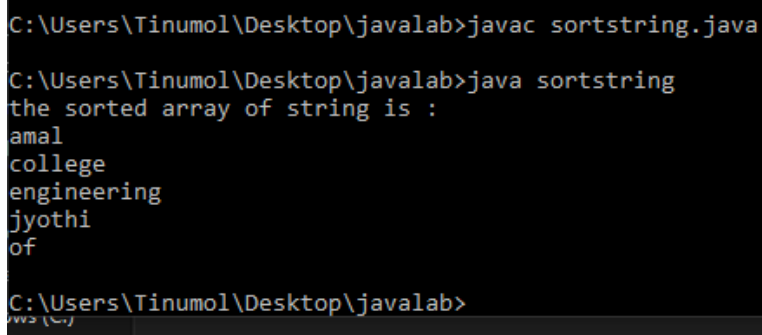

```
C:\Users\Tinumol\Desktop\javalab>javac sortstring.java  
C:\Users\Tinumol\Desktop\javalab>java sortstring  
the sorted array of string is :  
amal  
college  
engineering  
jyothi  
of  
C:\Users\Tinumol\Desktop\javalab>
```

Ln 28. Col 2

**RESULT :** The program has been executed and the output was verified.

**6.Search an element in an array.**

```
import java.util.*;

public class searchele{

public static void main(String[] args)

{

int n,i,b,flag=0;

Scanner s=new Scanner(System.in);

System.out.println("enter the number of elements for the array :");

n=s.nextInt();

int a[]=new int[n];

System.out.println("enter the elements of the array :");


for(i=0;i<n;i++)

{

a[i]=s.nextInt();

}

System.out.println("enter the element u want to search :");

b=s.nextInt();


for(i=0;i<n;i++)

{

if(a[i]==b)
```



```
{  
    flag=1;  
    break;  
}  
else  
{  
    flag=0;  
}  
}  
if(flag==1)  
{  
    System.out.println("element found at position :"+(i+1));  
}  
else  
{  
    System.out.println("element not found");  
}  
}  
}
```

## OUTPUT

```
C:\Users\Tinumol\Desktop\javalab>javac searchele.java
C:\Users\Tinumol\Desktop\javalab>java searchele
enter the number of elements for the array :
4
enter the elements of the array :
2 3 4 5
enter the element u want to search :
5
element found at position :4
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

## 7. Perform string manipulations.

```
public class Sample_String
{
    public static void main(String[] args)
    {
        String str_Sample = "RockStar";


        System.out.println("Length of String: " + str_Sample.length());

        System.out.println("Character at position 5: " + str_Sample.charAt(5));

        System.out.println("EndsWith character 'r': " + str_Sample.endsWith("r"));

        System.out.println("Replace 'Rock' with 'Duke': " + str_Sample.replace("Rock", "Duke"));
    }
}
```

## OUTPUT

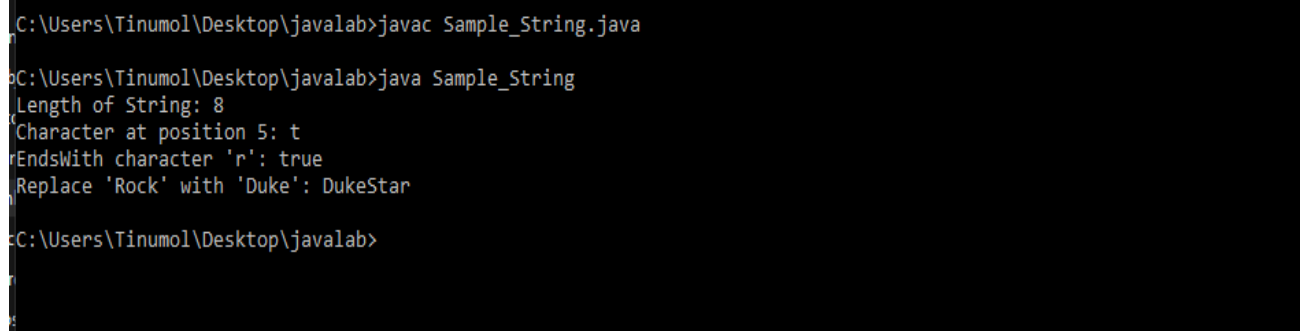

```
C:\Users\Tinumol\Desktop\javalab>javac Sample_String.java
C:\Users\Tinumol\Desktop\javalab>java Sample_String
Length of String: 8
Character at position 5: t
EndsWith character 'r': true
Replace 'Rock' with 'Duke': DukeStar
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

**8. Program to create a class for Employee having attributes eNo, eName eSalary. Read n employ information and Search for an employee given eNo, using the concept of Array of Objects.**

```
import java.util.Scanner;

public class Employee {

    int empid;

    String name;

    float salary;

    public void getInput() {

        Scanner in = new Scanner(System.in);

        System.out.print("Enter the empid :: ");

        empid = in.nextInt();

        System.out.print("Enter the name :: ");

        name = in.next();

        System.out.print("Enter the salary :: ");

        salary = in.nextFloat();

    }

    public void display() {
```

```
System.out.println("Employee id = " + empid);  
System.out.println("Employee name = " + name);  
System.out.println("Employee salary = " + salary);  
}
```

```
public static void main(String[] args) {
```

```
Employee e[] = new Employee[5];
```

```
for(int i=0; i<5; i++) {
```

```
    e[i] = new Employee();
```

```
    e[i].getInput();
```

```
}
```

```
System.out.println("**** Data Entered as below ****");
```

```
for(int i=0; i<5; i++) {
```

```
    e[i].display();
```

```
}
```

```
}
```

```
}
```

## OUTPUT

```
D:\MCA NOTES\Sem 2\Object Oriented Programming Lab\Java>java Employee
Enter the empid :: 2
Enter the name :: ram
Enter the salary :: 30000
Enter the empid :: 3
Enter the name :: john
Enter the salary :: 40000
Enter the empid :: 6
Enter the name :: rohan
Enter the salary :: 30000
Enter the empid :: 7
Enter the name :: george
Enter the salary :: 50000
Enter the empid :: 8
Enter the name :: vimal
Enter the salary :: 40000
**** Data Entered as below ****
Employee id = 2
Employee name = ram
Employee salary = 30000.0
Employee id = 3
Employee name = john
Employee salary = 40000.0
Employee id = 6
Employee name = rohan
Employee salary = 30000.0
Employee id = 7
Employee name = george
Employee salary = 50000.0
Employee id = 8
Employee name = vimal
Employee salary = 40000.0
```

**RESULT :** The program has been executed and the output was verified.

## 9.Area of different shapes using overloaded functions

```
public class shape
{
    int side,as,ar;

    public void area(int a)//area of square
    {
        side=a;

        as=a*a;

        System.out.println("area of square is"+as);
    }

    public void area(double r)//area of circle
    {

        double radi=r;

        double ac=(22/7)*radi*radi;

        System.out.println("area of circle is"+ac);
    }

    public void area(int l,int w)//area of rectangle
    {
        int len=l;

        int wid=w;

        ar=len*wid;


        System.out.println("area of rectangle"+ar);
    }

    public void area(int h,double r)//area of cylinder
    {
        int he=h;

        double rad=r;
```

```
double acy=(2*(22/7)*rad*he)+((22/7)*rad*rad);  
  
System.out.println("area of cylinder"+acy);  }  
  
public static void main(String[] args)  
{  shape s=new shape();  
  
s.area(4);//area of square  
  
s.area(5.52);//area of circle  
  
s.area(5,4);//area of rectangle  
  
s.area(5,4.5);    //area of cylinder  }  
  
}
```

## OUTPUT

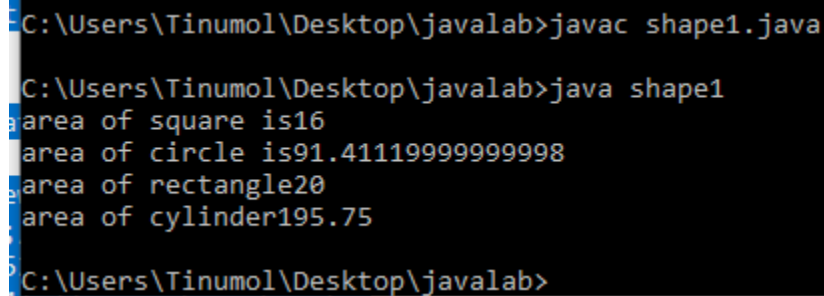

```
C:\Users\Tinumol\Desktop\javalab>javac shape1.java  
  
C:\Users\Tinumol\Desktop\javalab>java shape1  
area of square is16  
area of circle is91.41119999999998  
area of rectangle20  
area of cylinder195.75  
  
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.



**10 .Create a class ‘Employee’ with data members Empid, Name, Salary, Address and constructors to initialize the data members. Create another class ‘Teacher’ that inherit the properties of class employee and contain its own data members department, Subjects taught and constructors to initialize these data members and also include display function to display all the data members. Use array of objects to display details of N teachers.**

```
import java.util.*;

class Employee
{
    int empid;
    String name,address;
    double salary;

    public Employee(int empid, String name, String address, double salary) {
        this.empid = empid;
        this.name = name;
        this.address = address;
        this.salary = salary;
    }
}

public class Teacher extends Employee
{
    String subject,department;

    public Teacher(int empid, String name, String address, double salary,String department,String
subject ) {
        super(empid, name, address, salary);
```

```
this.subject = subject;

this.department = department;

}

void display()

{

System.out.println("Empid : "+this.empid+" Name : "+this.name+" Salary : "+this.salary+"
Address : "+this.address+" department : "+this.department+" Subjects : "+this.subject);

}

public static void main(String[] args) {

// TODO Auto-generated method stub

Scanner sc=new Scanner(System.in);

int n;

System.out.println("Enter number of Teachers : ");

n=sc.nextInt();

Teacher obj[]=new Teacher[n];

for(int i=0;i<n;i++) {

int j = i+1;

System.out.print("Enter Empid of teacher "+j+" : ");

int Empid = sc.nextInt();

System.out.print("Enter Name of teacher "+j+" : ");

String Name = sc.next();
```

```
System.out.print("Enter Salary of teacher "+j+" : ");

double Salary = sc.nextDouble();

System.out.print("Enter Address of teacher "+j+" : ");

String Address = sc.next();

System.out.print("Enter department of teacher "+j+" : ");

String department =sc.next();

System.out.print("Enter Subjects of teacher "+j+" : ");

String Subjects =sc.next();


obj[i] = new Teacher(Empid, Name, Address, Salary, department, Subjects);
}

System.out.println("\n-----\n");

System.out.println("Teacher's List \n");

for(int i=0;i<n;i++) {

obj[i].display();

}

}

}
```

## OUTPUT

```
C:\Users\Tinumol\Desktop\javalab>javac Teacher.java
C:\Users\Tinumol\Desktop\javalab>java Teacher
Enter number of Teachers :
2
Enter Empid of teacher 1 : 09
Enter Name of teacher 1 : erick
Enter Salary of teacher 1 : 20000
Enter Address of teacher 1 : er
Enter department of teacher 1 : MCA
Enter Subjects of teacher 1 : DBMS
Enter Empid of teacher 2 : 122
Enter Name of teacher 2 : keerthna
Enter Salary of teacher 2 : 20000
Enter Address of teacher 2 : sdsfg
Enter department of teacher 2 : MBA
Enter Subjects of teacher 2 : buisness

-----
Teacher's List
Empid : 9 Name : erick Salary : 20000.0 Address : er department : MCA Subjects : DBMS
Empid : 122 Name : keerthna Salary : 20000.0 Address : sdsfg department : MBA Subjects : buisness
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

**11.Create a class ‘Person’ with data members Name, Gender, Address, Age and a constructor to initialize the data members and another class ‘Employee’ that inherits the properties of class Person and also contains its own data members like Empid, Company\_name, Qualification, Salary and its own constructor. Create another class ‘Teacher’ that inherits the properties of class Employee and contains its own data members like Subject, Department, Teacherid and also contain constructors and methods to display the data members. Use array of objects to display details of N teachers.**

```
import java.util.Scanner;

class Person
{ String name,gender,address;

int age;

public Person(String name, String gender, String address, int age) {

super();

this.name = name;

this.gender = gender;

this.address = address;

this.age = age; } }

class Employee extends Person {

int empid;

String company_name,qualification;

double salary;

public Employee(String name, String gender, String address, int age, int empid, String company_name,

String qualification, double salary) {

super(name, gender, address, age);
```

```
this.empid = empid;

this.company_name = company_name;

this.qualification = qualification;

this.salary = salary; } }

class Teacher extends Employee {

String subject,department;

int teacherid;

public Teacher(String name, String gender, String address, int age, int empid, String
company_name,

String qualification, double salary, String subject, String department, int teacherid) {

super(name, gender, address, age, empid, company_name, qualification, salary);

this.subject = subject;

this.department = department;

this.teacherid = teacherid; }

void display() {

System.out.println("....Personal details...");

System.out.println(" Name : "+this.name+" Gender : "+this.gender+" Age : "+this.age);

System.out.println("...Employee details....");

System.out.println("Empid : "+this.empid + " company_name : "+this.company_name+" Salary :
"+this.salary+" Address : "+this.address+" qualification : "+this.qualification);

System.out.println("...Teacher's details...");

System.out.println(" teacherid : "+this.teacherid+ " department : "+this.department+" Subjects :
"+this.subject); } }

public class Main {

public static void main(String[] args) {
```

```
Scanner s=new Scanner(System.in);

int n;

System.out.println("Enter number of Teachers : "); n=s.nextInt();

Teacher obj[]=new Teacher[n];

for(int i=0;i<n;i++) {

System.out.println("Enter the person name:"); String nam1=s.next();

System.out.println("Enter the Gender: "); String gen1=s.next();

System.out.println("Enter the Address: "); String adr1=s.next();

System.out.println("Enter the Age:"); int age1=s.nextInt();

System.out.println("Enter the Employee id: ");

int id1=s.nextInt();

System.out.println("Enter the Company name: ");

String cname1=s.next();

System.out.println("Enter the Salary:");

double sal1=s.nextDouble();

System.out.println("Enter the Qualification:");

String qu1=s.next();

System.out.println("Enter the Teacher id: ");

int tid1=s.nextInt();

System.out.println("Enter the Department:");

String dept1=s.next();

System.out.println("Enter the Subject:");

String sub1=s.next();

obj[i]=new Teacher(nam1,gen1,adr1,age1,id1,cname1,qu1,sal1,sub1,dept1,tid1); }
```

```
System.out.println("\n-----\n");  
for(int i=0;i<n;i++) {  
    obj[i].display(); } } }
```

## OUTPUT

```
13  
Enter the Company name:  
sdf  
Enter the Salary:  
20000  
Enter the Qualification:  
MBA  
Enter the Teacher id:  
02  
Enter the Department:  
buisness  
Enter the Subject:  
Accountancy  
  
-----  
...Personal details...  
Name : sneha Gender : female Age :30  
...Employee details...  
Empid : 12 company_name : clp Salary : 20000.0 Address : asdff qualification : postgraduate  
...Teacher's details...  
teacherid : 1 department : MCA Subjects : DBMS  
...Personal details...  
Name : nisha Gender : female Age :28  
...Employee details...  
Empid : 13 company_name : sdf Salary : 20000.0 Address : asad qualification : MBA  
...Teacher's details...  
teacherid : 2 department : buisness Subjects : Accountancy  
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.



**12 . Write a program has class Publisher, Book, Literature and Fiction. Read the information and print the details of books from either the category, using inheritance.**

```
import java.util.Scanner;

class Publisher {
    String Pubname;

    Publisher()
    {
        Scanner s=new Scanner(System.in);
        System.out.println("Enter publisher name");
        Pubname=s.next();
    }
}

class Book extends Publisher
{
    String title, author;
    int price;

    Book()
    {
        Scanner s=new Scanner(System.in);
        System.out.println("Enter Title of the book");
        title=s.next();
        System.out.println("Enter Author's name");
        author=s.next();
        System.out.println("Enter price");
```

```
price=s.nextInt();
} }

class Literature extends Book
{ Literature()
{ System.out.println("Literature Books"); }

void display()
{
System.out.println("Publisher name: "+Pubname);
System.out.println("Title of the book: "+title);
System.out.println("Author's name: "+author);
System.out.println("Price: "+price);
} }

class Fiction extends Literature
{ Fiction()
{ System.out.println("Friction Books"); }

void display()
{ super.display(); }

public static void main(String args[])
{ int n;

Scanner s=new Scanner(System.in);

System.out.println("Enter the No of literature book: ");

int a=s.nextInt();

Literature L[]=new Literature[a];

for(int i=0;i<a;i++)
```

```
{ L[i]=new Literature(); }

System.out.println("Enter the No of Fiction book: ");

int b=s.nextInt();

Fiction F[]=new Fiction[b];

for(int i=0;i<b;i++)

{ F[i]=new Fiction(); }

int no;

System.out.println("Enter your choice of book");

no=s.nextInt();

int type =no;

switch (no) {

case 1:

System.out.println(".....Details of literature books");

for(int i=0;i<a;i++)

L[i].display();

break;

case 2:

System.out.println(".....Details of fiction books");

for(int i=0;i<b;i++)

F[i].display();

break;

default:

System.out.println("Wrong input"); } }
```

## OUTPUT

```
C:\Users\Tinumol\Desktop\javalab>javac Fiction.java
C:\Users\Tinumol\Desktop\javalab>java Fiction
Enter the No of literature book:
1
Enter publisher name
t nd t
Enter Title of the book
peace
Enter Author's name
andrew
Enter price
150
Literature Books
Enter the No of Fiction book:
2
Enter publisher name
t nd j
Enter Title of the book
grace
Enter Author's name
peter
Enter price
180
Literature Books
Friction Books
Enter publisher name
nota
Enter Title of the book
moost
```

**RESULT :** The program has been executed and the output was verified.

**13. Create classes Student and Sports. Create another class Result inherited from Student and Sports. Display the academic and sports score of a student.**

```
interface student
```

```
{ void stresullt(); }
```

```
interface sports
```

```
{ void spresult(); }
```

```
class result implements student,sports{
```

```
    public void spresult() {
```

```
        String hundred="First";
```

```
        String twohundred="Second";
```

```
        String fivehundred="First";
```

```
        String relay="Second";
```

```
        System.out.println("Sports Result");
```

```
        System.out.println("Hundred Meter:"+hundred);
```

```
        System.out.println("Two Hundred Meter:"+twohundred);
```

```
        System.out.println("Five Hundred Meter:"+fivehundred);
```

```
        System.out.println("Relay:"+relay); } 
```

```
    public void stresullt() {
```

```
        int physics=30;
```

```
        int chemistry=40;
```

```
        int maths=45;
```

```
        int english=50;
```

```
        int computer=50;
```

```
        System.out.println("Marks");
```

```
System.out.println("Physics:"+physics);

System.out.println("Chemistry:"+chemistry);

System.out.println("Mathematics:"+maths);

System.out.println("English:"+english);

System.out.println("Computer:"+computer);  }


public static void main(String[] args)

{   result r = new result();

    r.stresullt();

    r.spresult();  } }
```

## OUTPUT

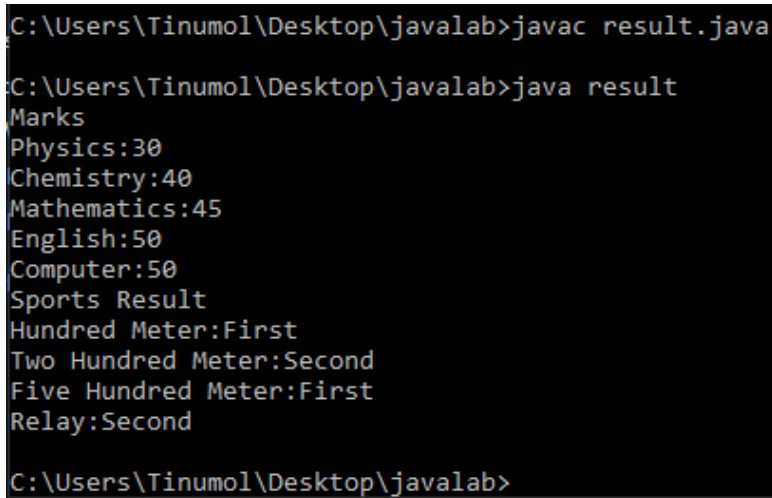

```
C:\Users\Tinumol\Desktop\javalab>javac result.java

C:\Users\Tinumol\Desktop\javalab>java result
Marks
Physics:30
Chemistry:40
Mathematics:45
English:50
Computer:50
Sports Result
Hundred Meter:First
Two Hundred Meter:Second
Five Hundred Meter:First
Relay:Second

C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

**14 .Create an interface having prototypes of functions area() and perimeter(). Create two classes Circle and Rectangle which implements the above interface. Create a menu driven program to find area and perimeter of objects.**

```
import java.util.Scanner;

interface Shape
{
    void input();
    void area();
    void perimeter();
}

class Circle implements Shape
{
    int r = 0;
    double pi = 3.14, ar = 0, per=0;

    public void input()
    {
        Scanner s = new Scanner(System.in);
        System.out.print("Enter radius of circle:");
        r= s.nextInt();
    }

    public void area()
    {
        ar = pi * r * r;
```

```
        System.out.println("Area of circle:"+ar);
    }

    public void perimeter()
    {
        per = 2 * pi * r;
        System.out.println("Perimeter of circle:"+per);
    }
}

class Rectangle implements Shape
{
    int l = 0, b = 0;
    double ar,per;

    public void input()
    {
        Scanner s = new Scanner(System.in);
        System.out.print("Enter length of rectangle:");
        l = s.nextInt();
        System.out.print("Enter breadth of rectangle:");
        b = s.nextInt();    }

    public void area()
    {
        ar = l * b;
        System.out.println("Area of rectangle:"+ar);    }

    public void perimeter()
    {
        per = 2 * (l + b);
```



```
        System.out.println("Perimeter of rectangle:"+per);    }    }
```

```
public class shapes
```

```
{
```

```
    public static void main(String[] args)
```

```
    { int n;
```

```
        Scanner s = new Scanner(System.in);
```

```
        Rectangle obj1 = new Rectangle();
```

```
        Circle obj2 = new Circle();
```

```
        System.out.println("1.Area of circle");
```

```
        System.out.println("2.Perimeter of circle");
```

```
        System.out.println("3.Area of rectangle");
```

```
        System.out.println("4.Perimeter of rectangle");
```

```
        System.out.println("Enter your option:");
```

```
        n= s.nextInt();
```

```
        switch(n) {
```

```
        case 1:
```

```
            obj2.input();
```

```
            obj2.area();
```

```
        break;
```

```
        case 2:
```


```
            obj2.input();
```

```
            obj2.perimeter();
```

```
        break;
```

```
        case 3:
            obj2.input();
            obj2.area();
        break;
        case 4:
            obj2.input();
            obj2.perimeter();
        break;
        default:
            System.out.println("Invalid option");
    }
}
}
```

## OUTPUT

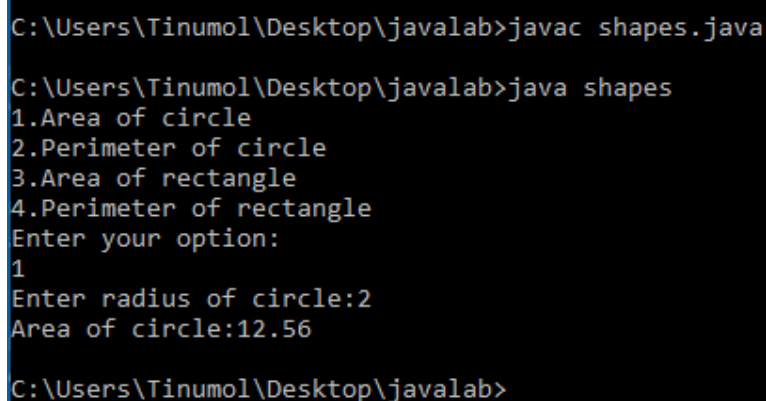

```
C:\Users\Tinumol\Desktop\javalab>javac shapes.java
C:\Users\Tinumol\Desktop\javalab>java shapes
1.Area of circle
2.Perimeter of circle
3.Area of rectangle
4.Perimeter of rectangle
Enter your option:
1
Enter radius of circle:2
Area of circle:12.56
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

**15.Prepare bill with the given format using calculate method from interface. Order No.**

```
interface bill
```

```
{
```

```
    int productdetails();
```

```
}
```

```
class product1 implements bill{
```

```
    int id = 101,quantity= 2,unit=25,total=0;
```

```
    String name="A";
```

```
    public int productdetails()
```

```
    {
```

```
        total = quantity * unit;
```

```
        System.out.println("Product Id :"+id);
```

```
        System.out.println("Name :"+name);
```

```
        System.out.println("Quantity :"+quantity);
```

```
        System.out.println("Unit price :"+unit);
```

```
        System.out.println("Total :"+total);
```

```
        return(total);
```

```
    }
```

```
}
```

```
class product2 implements bill{
```

```
int id = 102,quantity= 1,unit=100,total=0;
```

```
String name="B";
```

```
public int productdetails()
```

```
{
```

```
    total = quantity * unit;
```

```
    System.out.println("Product Id :"+id);
```

```
    System.out.println("Name :"+name);
```

```
    System.out.println("Quantity :"+quantity);
```

```
    System.out.println("Unit price :"+unit);
```

```
    System.out.println("Total :"+total);
```

```
    return(total);} }
```

```
public class productbill
```

```
{
```

```
    public static void main(String[] args)
```

```
{
```

```
        product1 p1 = new product1();
```

```
        product2 p2 = new product2();
```

```
        int t1= p1.productdetails();
```

```
        int t2= p2.productdetails();
```

```
        int t3=t1+t2;
```

```
        System.out.println("Net. Amount :"+t3);
```

```
    }  
}
```

## OUTPUT

```
C:\Users\Tinumol\Desktop\javalab>javac productbill.java  
C:\Users\Tinumol\Desktop\javalab>java productbill  
Product Id :101  
Name :A  
Quantity :2  
Unit price :25  
Total :50  
Product Id :102  
Name :B  
Quantity :1  
Unit price :100  
Total :100  
Net. Amount :150  
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

**16. Create a Graphics package that has classes and interfaces for figures Rectangle, Triangle, Square and Circle. Test the package by finding the area of these figures.**

```
package Graphics; interface
```

```
Area1
```

```
{
    public void Rectangle(); public void
    Triangle(); public void Square();
    public void Circle(); public void
    getRect(); public void getTri();
    public void getSqr(); public void
    getCr1();
}
```

```
//shapes.java
```

```
package Graphics; import
java.util.*;
```

```
public class shapes implements Area1
```

```
{
    double lr, lb, ra, th, tb, ta, saa, sa, cr, cc; public void
    getrect()
    {
        Scanner ab= new Scanner(System.in);
        System.out.println("Enter the length of the rectangle");
        lr=ab.nextInt();
        System.out.println("Enter the breadth of the rectangle");
        lb=ab.nextInt();

    }

    public void rectangle()
    {
```

```
        ra=lr*lb;

        System.out.println("Area of Rectangle is "+ra);
    }

    public void getTri()
    {

        Scanner cb= new Scanner(System.in);
        System.out.println("Enter the height of the Triangle");
        th=cb.nextInt();
        System.out.println("Enter the base of the Triangle");
        tb=cb.nextInt();
    }

    public void Triangle()
    {

        ta=0.5*th*tb;

        System.out.println("Area of Triangle angle is "+ta);
    }

    public void getSqr()
    {

        Scanner sq= new Scanner(System.in);
        System.out.println("Enter the Side of the Square");
        sa=sq.nextInt();
    }

    public void Square()
    {

        saa=sa*sa;

        System.out.println("Area of Square is "+saa);
    }
}
```

```
public void getCrl()
{
    Scanner sc= new Scanner(System.in);
    System.out.println("Enter the radius of the Circle");
    cc=sc.nextInt();
}

public void Circle()
{
    cr=3.14*cc*cc;
    System.out.println("Area of Square is "+cr);
}

public static void main(String[] args)
{
    shapess o= new shapess();o.getrect();
    o.rectangle();o.getTri();
    o.Triangle();
    o.getSqr();
    o.Square();
    o.getCrl();
    o.Circle();
}
}
```



## OUTPUT

```
D:\java_lab>javac -d . Area1.java
D:\java_lab>javac -d . shapess.java
D:\java_lab>java Graphicscs.shapess
Enter the length of the rectangle
5
Enter the breadth of the rectangle
2
Area of Rectangle is 10.0
Enter the height of the Triangle
9
Enter the base of the Triangle
2
Area of Triangle angle is 9.0
Enter the Side of the Square
4
Area of Square is 16.0
Enter the radius of the Circle
6
Area of Square is 113.03999999999999
```

**RESULT :** The program has been executed and the output was verified.

**17. Create an Arithmetic package that has classes and interfaces for the 4 basic arithmetic operations. Test the package by implementing all operations onto two given numbers**

```
package Aarithmetic;

interface operations
{
    public void input(); public void
    add(); public void subtract();
    public void multiply(); public
    void division();
}

package Aarithmetic;import
java.util.*;

public class basic implements operations
{
    double a,b,ad,dif,mult,div;public void
    input()
    {
        Scanner ab=new Scanner(System.in);
        System.out.println("Enter two numbers");
        a=ab.nextInt();
        b=ab.nextInt();
    }

    public void add()
    {
```

```
        ad=a+b;

        System.out.println("Sum is "+ad);
    }

    public void subtract()
    {

        dif=a-b;

        System.out.println("Difference is "+dif);
    }

    public void multiply()
    {

        mult=a*b;

        System.out.println("Product is "+mult);
    }

    public void division()
    {

        div=a/b;

        System.out.println("Quotient is "+div);
    }

    public static void main(String[] args)
    {

        basic o=new basic();o.input();
        o.add(); o.subtract();
        o.multiply();
        o.division();

    }

}
```

## OUTPUT



```
Command Prompt

D:\java_lab>javac -d . operations.java
D:\java_lab>javac -d . basic.java
D:\java_lab>java Aarithmetic.basic
Enter two numbers
5
2
Sum is 7.0
Difference is 3.0
Product is 10.0
Quotient is 2.5
D:\java_lab>
```

**RESULT :** The program has been executed and the output was verified.

**18. Write a user defined exception class to authenticate the user name and password.**

```
import java.util.Scanner;

class UsernameException extends Exception {

    public UsernameException(String msg) {

        super(msg);

    }

}

class PasswordException extends Exception {

    public PasswordException(String msg) {

        super(msg);

    }

}

public class CheckLoginCredential {

    public static void main(String[] args) {

        Scanner s = new Scanner(System.in);

        String username, password;

        System.out.print("Enter username :: ");

        username = s.nextLine();
```

```
System.out.print("Enter password :: ");

password = s.nextLine();

int length = username.length();

try {

    if(length < 6)

        throw new UsernameException("Username must be greater than 6 characters ???");

    else if(!password.equals("hello"))

        throw new PasswordException("Incorrect password\nType correct password ???");

    else

        System.out.println("Login Successful !!!");

}

catch (UsernameException u) {

    u.printStackTrace();

}

catch (PasswordException p) {

    p.printStackTrace();

}

finally {


    System.out.println("The finally statement is executed");

}

}
```

}

## OUTPUT

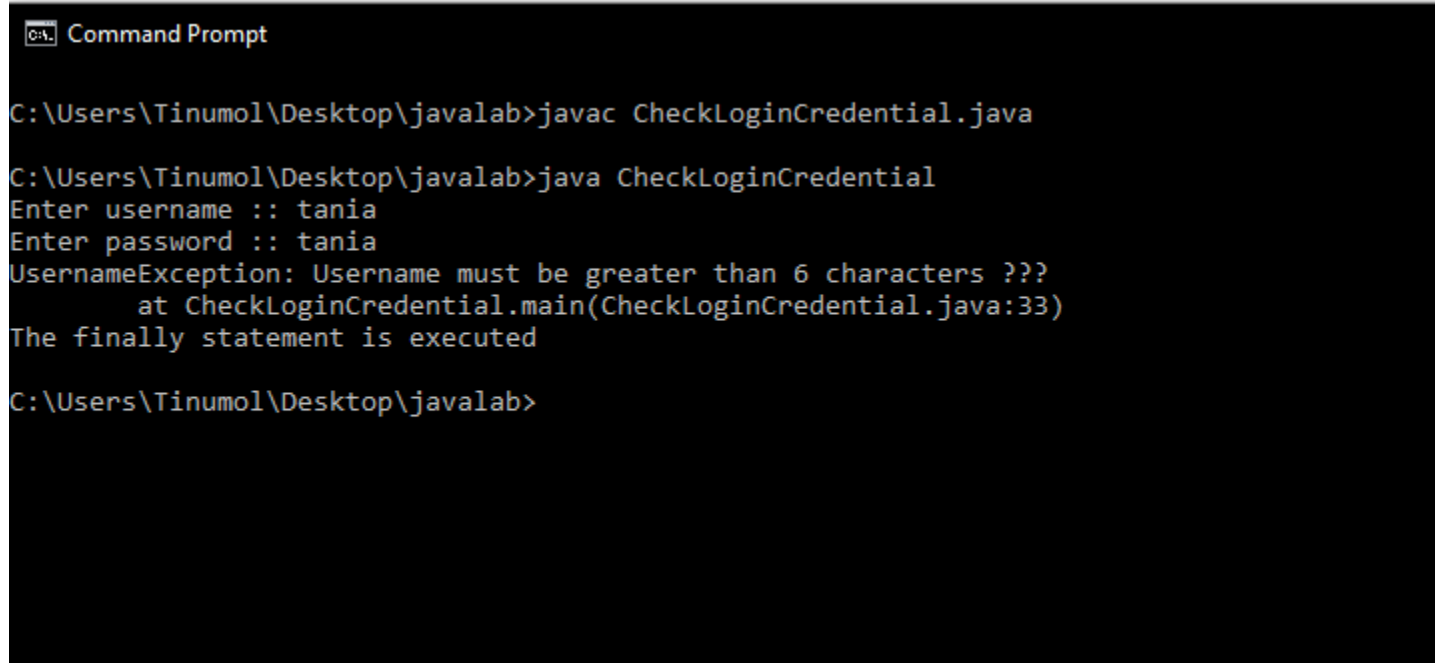

```
C:\Users\Tinumol\Desktop\javalab>javac CheckLoginCredential.java
C:\Users\Tinumol\Desktop\javalab>java CheckLoginCredential
Enter username :: tania
Enter password :: tania
UsernameException: Username must be greater than 6 characters ???
    at CheckLoginCredential.main(CheckLoginCredential.java:33)
The finally statement is executed
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

**19. Find the average of N positive integers, raising a user defined exception for each negative input.**

```
import java.util.Scanner;

import java.util.InputMismatchException;

public class TestDemo
{
    public static void main(String args[])
    {
        double total = 0, N, userInput;
        Scanner input = new Scanner(System.in);
        while (true)
        {
            System.out.print("Enter how many numbers(N) to calculate average:");
            userInput = input.nextDouble();
            if (userInput > 0)
            {
                N = userInput;
                break;
            }
            else
                System.out.println("N must be positive.");
        }
        for (int i = 0; i < N; i++)
        {
```



```
        while (true)
        {
            System.out.print("Enter number:");

            try
            {
                userInput = input.nextDouble();
                total += userInput;
                break;
            }

            catch (InputMismatchException e)
            {
                input.nextLine();
                System.out.println("Input must be a number. Try again");
            }
        }

        System.out.println("Average: "+ total / N);
    }
}
```

## OUTPUT

```
D:\MCA NOTES\Sem 2\Object Oriented Programming Lab\14-08-2021(Bijimol)>javac TestDemo.java
D:\MCA NOTES\Sem 2\Object Oriented Programming Lab\14-08-2021(Bijimol)>java TestDemo
Enter how many numbers(N) to calculate average:5
Enter number:2
Enter number:5
Enter number:7
Enter number:14
Enter number:12
Average: 8.0
```

**RESULT :** The program has been executed and the output was verified.

**20. Define 2 classes; one for generating multiplication table of 5 and other for displaying first N prime numbers. Implement using threads. (Thread class)**

```
import java.util.*;

class ThreadA extends Thread{

    public void run( ) {

        int n = 5;

        for (int i = 1; i <= 10; ++i)

            System.out.println(n + " * " + i +

                                " = " + n * i);

        System.out.println("Exiting from Thread A ...");

    }

}

class ThreadB extends Thread

{

    public void run( )

    {

        Scanner sc = new Scanner(System.in);

        int i,n,p,count,flag;

        System.out.println("Enter the number of prime terms you want!");

        n=sc.nextInt();

        System.out.println("First "+n+" prime numbers are :-");
```

```
p=2;

i=1;

while(i<=n)

{

    flag=1;

    for(count=2;count<=p-1;count++)

    {

        if(p%count==0)

        {

            flag=0;

            break;

        }

    }

    if(flag==1)

    {

        System.out.print(p+" ");

        i++;

    }

    p++;

}

//System.out.println("Exiting from Thread B ...");
```

```
}  
  
public class Demonstration_111  
{  
    public static void main(String args[]) {  
        ThreadA a = new ThreadA();  
        ThreadB b = new ThreadB();  
        a.start();  
        b.start();  
        System.out.println("... Multithreading is over ");  
    }  
}
```

## OUTPUT

```
D:\MCA NOTES\Sem 2\Object Oriented Programming Lab\14-08-2021(Bijimol)>java Demonstration_111  
... Multithreading is over  
5 * 1 = 5  
5 * 2 = 10  
5 * 3 = 15  
5 * 4 = 20  
5 * 5 = 25  
5 * 6 = 30  
5 * 7 = 35  
5 * 8 = 40  
5 * 9 = 45  
5 * 10 = 50  
Exiting from Thread A ...  
Enter the number of prime terms you want!  
4  
First 4 prime numbers are :-  
2 3 5 7
```

**RESULT :** The program has been executed and the output was verified.

**21. Define 2 classes; one for generating Fibonacci numbers and other for displaying even numbers in a given range. Implement using threads. (Runnable Interface)**


```
public class Mythread {  
  
    public static void main(String[] args) {  
  
        Runnable r = new Runnable1();  
  
        Thread t = new Thread(r);  
  
        t.start();  
  
        Runnable r2 = new Runnable2();  
  
        Thread t2 = new Thread(r2);  
  
        t2.start();  
  
    }  
}
```

```
class Runnable2 implements Runnable{  
  
    public void run(){  
  
        for(int i=0;i<11;i++){  
  
            if(i%2 == 1)  
  
                System.out.println(i);  
  
        }  
  
    }  
}
```

```
class Runnable1 implements Runnable{
```

```
public void run(){  
    int n1=0,n2=1,n3,i,count=10;  
    System.out.print(n1+" "+n2);//printing 0 and 1  
  
    for(i=2;i<count;++i)//loop starts from 2 because 0 and 1 are already printed  
    {  
        n3=n1+n2;  
        System.out.print(" "+n3);  
        n1=n2;  
        n2=n3;  
    }  
}
```

## OUTPUT

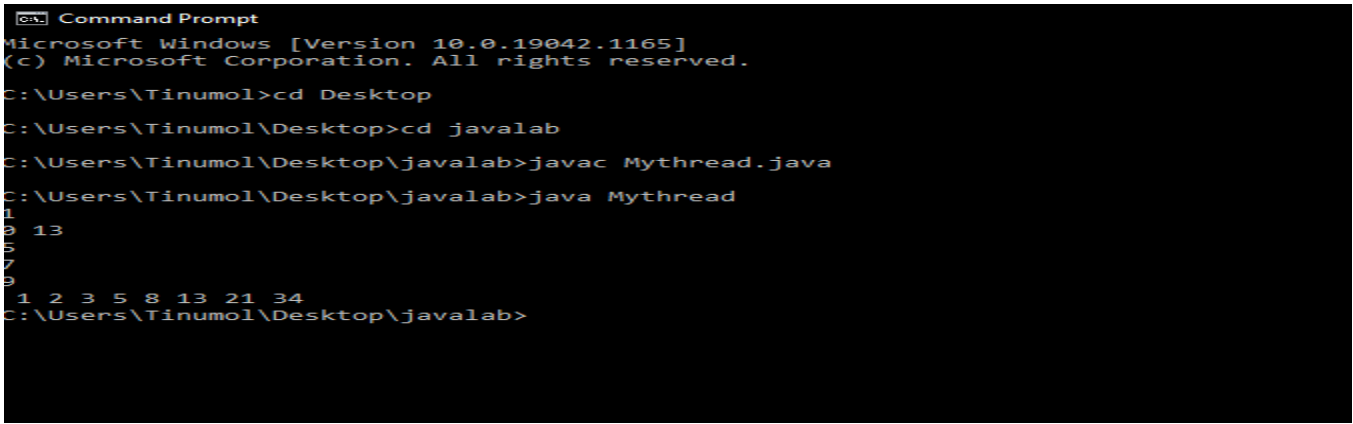

```
Command Prompt  
Microsoft Windows [Version 10.0.19042.1165]  
(c) Microsoft Corporation. All rights reserved.  
C:\Users\Tinamol>cd Desktop  
C:\Users\Tinamol\Desktop>cd javalab  
C:\Users\Tinamol\Desktop\javalab>javac Mythread.java  
C:\Users\Tinamol\Desktop\javalab>java Mythread  
0 1  
1 2 3 5 8 13 21 34  
C:\Users\Tinamol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

## 22. Program to draw Circle, Rectangle, Line in Applet.


```
import java.awt.*;

import java.applet.*;

public class circle extends Applet
{
    public void paint(Graphics g)
    {
        g.setColor(Color.red);
        g.fillOval(80,70,150,150);
        g.drawOval(80,70,150,150);
        g.setColor(Color.BLACK);
    }
}

<html>
<head>
</head>
<body>
<div align="center">
<applet code="circle.class"width="800"height="500">
</applet>
</div>
</body>
</html>
```






```
import java.awt.*;
import java.applet.*;
public class rectapplet extends Applet
{
public void paint(Graphics g)
{
    g.setColor(Color.YELLOW);
    g.fillRect(50,100,180,80);
    g.setColor(Color.BLACK);
    g.drawRect(50,100,180,80);
}
}
```

<html>

<head>

</head>

```
<body>  
<div align="center">  
<applet code="rectapplet.class"width="800"height="500">  
</applet>  
</div>  
</body>  
</html>
```



**RESULT :** The program has been executed and the output was verified.

### 23. Program to find maximum of three numbers using AWT.

```
import java.awt.*;

import java.applet.*;

import java.awt.event.*;

public class findlarge extends Applet implements ActionListener

{

    TextField t1,t2,t3,t4;

    Button b1;

    public void init()

    {

        t1=new TextField(15);

        t1.setBounds(100,25,50,20);

        t2=new TextField(15);

        t2.setBounds(100,25,50,20);

        t3=new TextField(15);

        t3.setBounds(100,25,50,20);

        t4=new TextField("Ans");

        t4.setBounds(175,50,50,20);

        b1= new Button("Find");

        b1.setBounds(175,65,50,40);

        add(t1);

        add(t2);
```

```
add(t3);

add(t4);

add(b1);

b1.addActionListener(this);

}

public void actionPerformed(ActionEvent e)
{
    int i,j,k;

    i=Integer.parseInt(t1.getText());

    j=Integer.parseInt(t2.getText());

    k=Integer.parseInt(t3.getText());

    if(i<j)
    {
        if(j<k)

            t4.setText(""+k);

        else

            t4.setText(""+j);

    }

    else

        t4.setText(""+i);

}

}
```

<html>

```
<head>

</head>

<body>

<div align="center">

<applet code="findlarge.class" width="800" height="500">

</applet>

</div>

</body>

</html>
```

## OUTPUT



134 121 123 134 Find

**RESULT :** The program has been executed and the output was verified.

**24. Find the percentage of marks obtained by a student in 5 subjects. Display a happy face if he secures above 50% or a sad face if otherwise.**

```
import java.awt.*;

import java.awt.event.*;

import java.applet.*;

public class marks extends Applet implements ActionListener {

    public int per =0;

    Label l1 = new Label("enter Marks of Subject 1: ");

    Label l2 = new Label("enter Marks of Subject 2: ");

    Label l3 = new Label("enter Marks of Subject 3: ");

    Label l4 = new Label("enter Marks of Subject 4: ");

    Label l5 = new Label("enter Marks of Subject 5: ");

    Label l6 = new Label("Total Percentage: ");


    TextField t1 = new TextField(10);

    TextField t2 = new TextField(10);

    TextField t3 = new TextField(10);

    TextField t4 = new TextField(10);

    TextField t5 = new TextField(10);

    TextField t6 = new TextField(10);


    Button b1 = new Button("CALCULATE PERCENTAGE");
```

```
public marks()
{
11.setBounds(50, 100, 280, 20);
12.setBounds(50, 150, 280, 20);
13.setBounds(50, 200, 280, 20);
14.setBounds(50, 250, 280, 20);
15.setBounds(50, 300, 280, 20);
16.setBounds(50, 350, 280, 20);

t1.setBounds(200, 100, 300, 20);
t2.setBounds(200, 150, 300, 20);
t3.setBounds(200, 200, 300, 20);
t4.setBounds(200, 250, 300, 20);
t5.setBounds(200, 300, 300, 20);
t6.setBounds(200, 350, 300, 20);

b1.setBounds(200,400, 200, 20);

GridLayout g1 = new GridLayout(20, 2, 5, 5);
setLayout(g1);

add(l1);

add(t1);

add(l2);

add(t2);

add(l3);
```

```
add(t3);

add(l4);

add(t4);

add(l5);

add(t5);

add(l6);

add(t6);

add(b1);

b1.addActionListener(this);

}

@Override

public void actionPerformed(ActionEvent e) {

// TODO Auto-generated method stub

int m1 = Integer.parseInt(t1.getText());

int m2= Integer.parseInt(t2.getText());

int m3= Integer.parseInt(t3.getText());

int m4= Integer.parseInt(t4.getText());

int m5= Integer.parseInt(t5.getText());


if(e.getSource()==b1)

{

int add=m1+m2+m3+m4+m5;

per=add/5;

t6.setText(String.valueOf(per)+" %");
```



```
repaint();  
}  
  
}  
  
public void paint(Graphics g)  
{  
    if(per>=50)  
    {  
        g.setColor(Color.yellow);  
        g.drawOval(100, 700, 150, 150);  
        g.fillOval(100, 700, 150, 150);  
        g.setColor(Color.BLACK);  
        g.fillOval(120, 740, 15, 15);  
        g.fillOval(170, 740, 15, 15);  
        g.drawArc(130, 800, 50, 20, 180, 180);  
    }  
    else if(per>0 && per<50)  
    {  
        g.setColor(Color.yellow);  
        g.drawOval(100, 700, 150, 150);  
        g.fillOval(100, 700, 150, 150);  
        g.setColor(Color.BLACK);  
        g.fillOval(120, 740, 15, 15);  
    }  
}
```

```

g.fillOval(170, 740, 15, 15);

g.drawArc(130,820,50,20,0,180);

}

}

public static void main(String args[]) {

    new marks();

} }

<html><head>

</head>

<body><div align="center">

<applet code="marks.class"width="1000"height="1000">

</applet></div>

</body></html>

```

## OUTPUT

Applet Viewer: marks.class

Applet

enter Marks of Subject 1:

44

enter Marks of Subject 2:

45

enter Marks of Subject 3:

46

enter Marks of Subject 4:

47

enter Marks of Subject 5:

49

Total Percentage:

46 %

CALCULATE PERCENTAGE



Applet Viewer: marks.class

Applet

enter Marks of Subject 1:

55

enter Marks of Subject 2:

95

enter Marks of Subject 3:

75

enter Marks of Subject 4:

95

enter Marks of Subject 5:

95

Total Percentage:

75 %

CALCULATE PERCENTAGE



**RESULT :** The program has been executed and the output was verified.

**25. Using 2D graphics commands in an Applet, construct a house. On mouse click event, change the color of the door from blue to red.**

```
import java.applet.*;
import java.awt.*;
import java.util.*;
import java.awt.event.*;

public class house extends Applet implements MouseListener,Runnable
{
    private Color textColor = Color.BLUE;

    public void paint(Graphics g)
    { int [] x = {150, 300, 225};
      int [] y = {150, 150, 25};

      g.drawRect(150, 150, 150, 200); //House
      g.drawRect(200, 200, 50, 150);
      g.setColor(Color.blue);
      g.setColor(textColor);
      g.fillRect(200, 200, 50, 150); // Door
      g.setColor(Color.black);
      g.fillPolygon(x, y, 3); // Roof
    }

    public void init()
    {
```

```
this.setSize(200,200);

addMouseListener(this);

}

public void run()
{
    while(true)
    {
        repaint();

        try
        {
            Thread.sleep(17);
        }

        catch (InterruptedException e)
        {
            e.printStackTrace();
        }

    }
}

public void mouseClicked(MouseEvent e)
{
    int x=e.getX(),y=e.getY();

    if(x>=60 && x<=120 && y>=80 && y<=95)

        textColor=Color.BLUE;
```

```
else
```

```
    textColor=Color.RED;
```

```
    repaint();
```

```
    System.out.println("Mouse Position: X= "+x+"Y"+y);
```

```
}
```

```
public void mousePressed(MouseEvent e){ }
```

```
public void mouseReleased(MouseEvent e){ }
```

```
public void mouseEntered(MouseEvent e){ }
```

```
public void mouseExited(MouseEvent e){ }
```

```
}
```

```
<html><head></head>
```

```
<body><div align="center">
```

```
<applet code="house.class"width="800"height="500">
```


```
</applet></div>
```

```
</body></html>
```

## OUTPUT

Applet Viewer: house.class


Applet



Applet started.

Applet Viewer: house.class

Applet



Applet started.

**RESULT :** The program has been executed and the output was verified.

**26. Implement a simple calculator using AWT components.**

```
import java.awt.*;

import java.awt.event.*;

class calc implements ActionListener

{

    Frame f=new Frame();

    Label l1=new Label("enter number ");

    Label l2=new Label("enter number ");

    Label l3=new Label("result");

    TextField t1=new TextField();

    TextField t2=new TextField();

    TextField t3=new TextField();

    Button b1=new Button("ADD");

    Button b2=new Button("SUB");

    Button b3=new Button("MUL");

    Button b4=new Button("DIV");

    calc() {

        l1.setBounds(50,100,100,20);

        l2.setBounds(50,150,100,20);

        l3.setBounds(50,200,100,20);

        t1.setBounds(200,100,100,20);

        t2.setBounds(200,150,100,20);

        t3.setBounds(200,200,100,20);
```



```
b1.setBounds(50,250,50,20);
b2.setBounds(110,250,50,20);
b3.setBounds(170,250,50,20);
b4.setBounds(230,250,50,20);

f.add(l1);
f.add(l2);
f.add(t1);
f.add(t2);
f.add(t3);
f.add(b1);
f.add(b2);
f.add(b3);
f.add(b4);

b1.addActionListener(this);
b2.addActionListener(this);
b3.addActionListener(this);
b4.addActionListener(this);

f.setLayout(null);
f.setVisible(true);
f.setSize(500,500);  }

public void actionPerformed(ActionEvent e){

int i=Integer.parseInt(t1.getText());

int j=Integer.parseInt(t2.getText());

if(e.getSource()==b1) {
```

```
t3.setText(String.valueOf(i+j));  }  
  
if(e.getSource()==b2) {  
  
t3.setText(String.valueOf(i-j));  }  
  
if(e.getSource()==b3)  
{  
  
t3.setText(String.valueOf(i*j));  
  
}  
  
if(e.getSource()==b4)  
{  
  
t3.setText(String.valueOf(i/j));  }  
  
}  
  
public static void main(String args[]) {  
  
new calc();  
  
}  
  
}
```

## OUTPUT



— □ ×

enter number

3

enter number

2

6

ADD

SUB

MUL

DIV



— □ ×

enter number

10

enter number

2

5

ADD

SUB

MUL

DIV

**RESULT :** The program has been executed and the output was verified.

**27. Develop a program that has a Choice component which contains the names of shapes such as rectangle, triangle, square and circle. Draw the corresponding shapes for given parameters as per user's choice.**

```
import java.applet.*;
import java.awt.*;
import java.awt.Graphics;
import java.awt.event.*;

public class figchoice extends Applet implements ItemListener {
    Choice ch;
    int x1[]= {50,120,220,20};
    int y1[]= {50,120,20,20};
    int n=4;
    int Selection;

    public void init()
    {
        ch = new Choice();
        ch.addItem("Select a Shape");
        ch.addItem("Rectangle");
        ch.addItem("Triangle");
        ch.addItem("Square");
        ch.addItem("Circle");
        add(ch);
        ch.addItemListener(this);
    }
}
```

```
}  
  
public void itemStateChanged (ItemEvent e)  
{  
    Selection = ch.getSelectedIndex();  
    repaint();  
}  
  
public void paint(Graphics g)  
{  
    super.paint(g);  
    if (Selection == 1)  
    {    g.drawRect(50,50,100,150);    }  
    if (Selection == 2)  
    {    g.drawPolygon(x1,y1,n);    }  
    if (Selection == 3)  
    {    g.drawRect(50,50,100,100);    }  
    if (Selection == 4)  
    {  
        g.drawOval(70,30,100,100);  
    } } }  
  
<html><head>  
  
</head>  
  
<body>  
  
<div align="center">  
  
<applet code="figchoice.class"width="800"height="500">
```


```
</applet>
```

```
</div>
```


```
</body>
```

```
</html>
```

## OUTPUT


 Applet Viewer: figchoice.class

Applet



Triangle ▼


Applet



Square ▼

Applet Viewer: figchoice.class


Applet



Circle

Applet Viewer: figchoice.class

Applet



Rectangle

**RESULT :** The program has been executed and the output was verified.


## 28. Develop a program to handle all window events

```
import java.awt.*;
import java.awt.event.WindowEvent;
import java.awt.event.WindowListener;
public class winexamp extends Frame implements WindowListener
{
    winexamp()
    {
        addWindowListener(this);
        setSize(400,400);
        setLayout(null);
        setVisible(true);
    }
    public static void main(String args[])
    {
        new winexamp();
    }
    public void windowActivated(WindowEvent arg0)
    {
        System.out.println("Window Activated");
    }
    public void windowClosed(WindowEvent args0)
    {
        System.out.println("Window closed");
    }
    public void windowClosing(WindowEvent arg0)
    {
        System.out.println("Window closing");
    }
    public void windowDeactivated(WindowEvent arg0)
    {
        System.out.println("Window DEActivated");
    }
    public void windowDeiconified(WindowEvent arg0)
    {
        System.out.println("Window Deiconified");
    }
}
```



```
public void windowIconified(WindowEvent arg0)
{
    System.out.println("Window iconified");
}
public void windowOpened(WindowEvent arg0)
{
    System.out.println("Window opened");
}
}
```

## OUTPUT

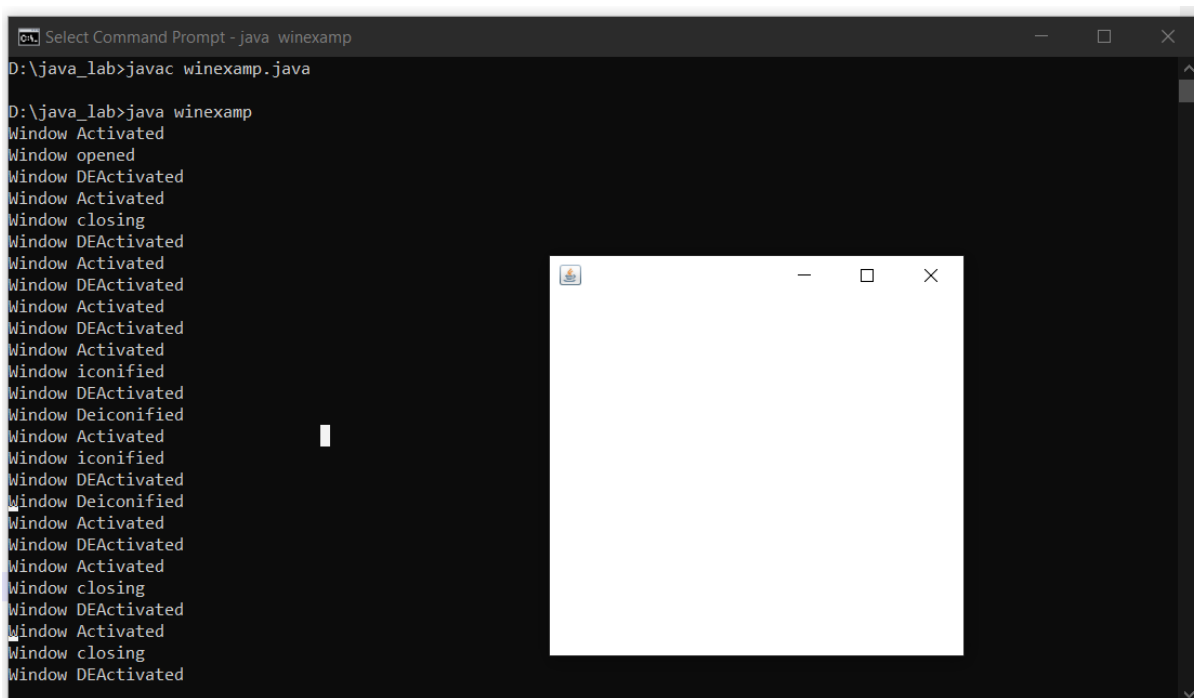

**RESULT :** The program has been executed and the output was verified.

## 29. Develop a program to handle all mouse events

```
import java.awt.*;

import java.awt.event.*;

public class mousexamp12 extends Frame implements MouseListener

{

    mousexamp12()

    {

        addMouseListener(this);

        setSize(400,400);

        setLayout(null);

        setVisible(true);

    }

    public void mouseClicked(MouseEvent e)

    {

        Graphics g=getGraphics();

        g.setColor(Color.blue);

        g.fillOval(e.getX(),e.getY(),30,30);

    }

    public void mouseEntered(MouseEvent e)

    {

    }

    public void mouseExited(MouseEvent e)

    {

    }


    public void mousePressed(MouseEvent e)

    {

    }
```

```
}  
  
public void mouseReleased(MouseEvent e){  
}  
  
public static void main(String args[])  
{  
    new mousexamp12();  
}  
}
```

## OUTPUT

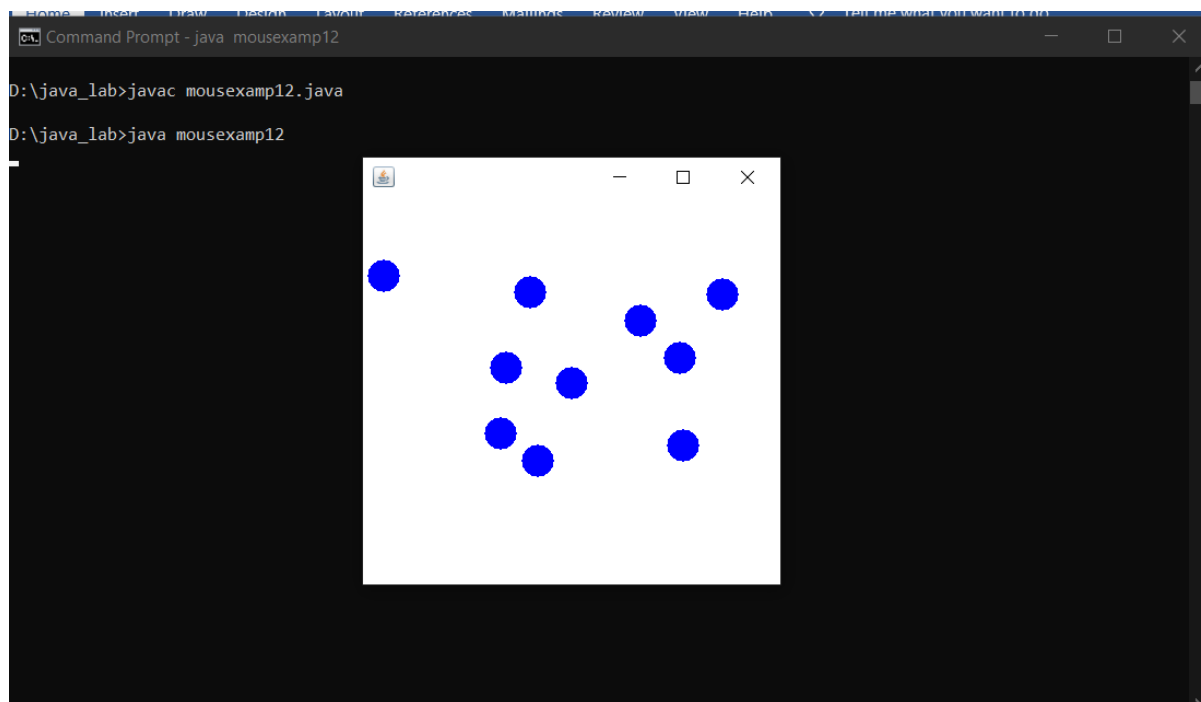

**RESULT :** The program has been executed and the output was verified.

### 30. Develop a program to handle Key events.

```
import java.awt.*;
import java.awt.event.*;

public class keyexamp extends Frame implements KeyListener
{
    Label l;
    TextArea a;

    keyexamp()
    {
        l=new Label();
        l.setBounds(20,50,200,20);
        a=new TextArea();
        a.setBounds(20,80,300,300);
        a.addKeyListener(this);
        add(l);
        add(a);
        setSize(400,400);
        setLayout(null);
        setVisible(true);
    }


    public void keyPressed(KeyEvent e)
    {
    }

    public void keyReleased(KeyEvent e)
    {
    }

    String t=a.getText();
```

```
String w[]=t.split("\\s");  
l.setText("Words="+w.length+" Characters="+t.length());  
}  
public void keyTyped(KeyEvent e)  
{  
public static void main(String args[])  
{  
new keyexamp();  
}  
}
```

## OUTPUT

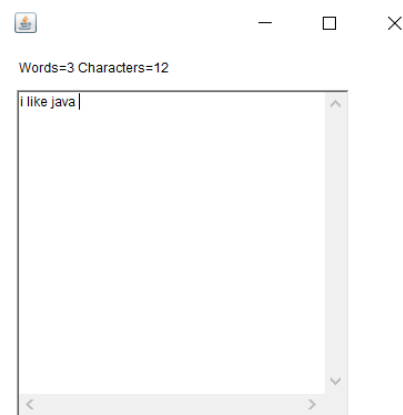

**RESULT :** The program has been executed and the output was verified.

### 31.Producer/Consumer using ITC

```
import java.util.*;

class Q
{
    int n;

    boolean statusFlag=false;

    synchronized void put(int n)
    {
        try
        {
            while(statusFlag)
            {
                wait();
            }
        }

        catch(InterruptedException e){ }

        this.n=n;

        System.out.println("Put :"+n);

        statusFlag=true;

        notify();

    }

    synchronized int get()
    {
        try{
```

```
while(!statusFlag)
{
    wait();
}

}

catch(InterruptedException e){}

statusFlag=false;

System.out.println("Got :"+n);

notify();

return n;

}

}

class Producer implements Runnable
{
    Q q;

    Producer(Q q)
    {
        this.q=q;

        new Thread(this, "Producer").start();
    }

    public void run()
    {
        int i=0;

        while(true)
```

```
{  
q.put(i++);  
}  
}  
}  
  
class Consumer implements Runnable  
{  
Q q;  
Consumer(Q q)  
{  
this.q=q;  
new Thread(this,"Consumer").start();  
}  
public void run()  
{  
while(true)  
{  
q.get();  
}  
}  
}  
  
public class D  
{  
public static void main(String[] args)
```



```
{  
Q q=new Q();  
Producer p=new Producer(q);  
Consumer c=new Consumer(q);  
}  
}
```

## OUTPUT

```
Got: 699  
Put: 700  
Got: 700  
Put: 701  
Got: 701  
Put: 702  
Got: 702  
Put: 703  
Got: 703  
Put: 704  
Got: 704  
Put: 705  
Got: 705  
Put: 706  
Got: 706  
Put: 707  
Got: 707  
Put: 708  
Got: 708  
Put: 709  
Got: 709  
Put: 710  
Got: 710  
Put: 711  
Got: 711  
Put: 712  
Got: 712  
Put: 713  
Got: 713  
Put: 714  
Got: 714  
Put: 715  
Got: 715  
Put: 716  
Got: 716  
Put: 717  
Got: 717  
Put: 718  
Got: 718  
Put: 719
```

**RESULT :** The program has been executed and the output was verified.

**32. Program to create a generic stack and do the Push and Pop operations.**

```
public class StackAsLinkedList {

    StackNode root;

    static class StackNode {

        int data;

        StackNode next;

        StackNode(int data) { this.data = data; }

    }

    public boolean isEmpty()

    {

        if (root == null) {

            return true;

        }

        else

            return false;

    }

    public void push(int data)

    {

        StackNode newNode = new StackNode(data);
```

```
        if (root == null) {  
            root = newNode;  
        }  
        else {  
            StackNode temp = root;  
            root = newNode;  
            newNode.next = temp;  
        }  
        System.out.println(data + " pushed to stack");  
    }  
  
    public int pop()  
    {  
        int popped = Integer.MIN_VALUE;  
        if (root == null) {  
            System.out.println("Stack is Empty");  
        }  
        else {  
            popped = root.data;  
            root = root.next;  
        }  
        return popped;  
    }  
}
```

```
public int peek()
{
    if (root == null) {
        System.out.println("Stack is empty");
        return Integer.MIN_VALUE;
    }
    else {
        return root.data;
    }
}

// Driver code

public static void main(String[] args)
{

    StackAsLinkedList sll = new StackAsLinkedList();

    sll.push(10);
    sll.push(20);
    sll.push(30);

    System.out.println(sll.pop()
        + " popped from stack");
```

```
        System.out.println("Top element is " + sll.peek());  
    }  
}
```

## OUTPUT

```
C:\Users\Tinumol\Desktop\javalab>java GFG  
s1 after pushing 10, 20 and 30 :  
10->20->30  
s1 after pop :  
10->20  
  
s2 after pushing 3 elements :  
hello->world->java  
s2 after pushing 4th element :  
Stack Overflow  
  
s3 after pushing 2 elements :  
100.0->200.0  
top element of s3:  
200.0  
  
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

### 33. Using generic method perform Bubble sort.

```
public class BubbleSort {  
    static void bubbleSort(int[] arr) {  
        int n = arr.length;  
        int temp = 0;  
  
        for(int i = 0; i < n; i++) {  
            for(int j=1; j < (n-i); j++) {  
                if(arr[j-1] > arr[j]) {  
                    temp = arr[j-1];  
                    arr[j-1] = arr[j];  
                    arr[j] = temp;  
                }  
            }  
        }  
    }  
  
    public static void main(String[] args) {  
        int arr[] = { 1, 6, -2, 6, -4, 8, 5, -7, -9, 4 };  
        System.out.println("Array Before Bubble Sort");  
  
        for(int i = 0; i < arr.length; i++) {  
            System.out.print(arr[i] + " ");  
        }  
    }  
}
```

```
System.out.println();

bubbleSort(arr);

System.out.println("Array After Bubble Sort");


for(int i = 0; i < arr.length; i++) {

    System.out.print(arr[i] + " ");

}

}

}
```

## OUTPUT

```
C:\Users\Tinumol\Desktop\javab>javac BubbleSort.java
C:\Users\Tinumol\Desktop\javab>java BubbleSort
Array Before Bubble Sort
2 5 -2 6 -3 8 0 -7 -9 4
Array After Bubble Sort
-9 -7 -3 -2 0 2 4 5 6 8
C:\Users\Tinumol\Desktop\javab>
```

**RESULT :** The program has been executed and the output was verified.

### 34. Program to demonstrate the creation of queue object using the PriorityQueue class

```
import java.util.*;

class PriorityQueue1 {

public static void main(String args[]){

PriorityQueue<String> queue=new PriorityQueue<String>();

queue.add("Amit");

queue.add("Vijay");

queue.add("Karan");

queue.add("Jai");

queue.add("Rahul");

System.out.println("head:"+queue.element());

System.out.println("head:"+queue.peek());

System.out.println("iterating the queue elements:");

Iterator itr=queue.iterator();

while(itr.hasNext()){

System.out.println(itr.next());

}

queue.remove();

queue.poll();

System.out.println("after removing two elements:");

Iterator<String> itr2=queue.iterator();

while(itr2.hasNext()){

System.out.println(itr2.next());
```



```
}  
  
}  
  
}
```

## OUTPUT

```
C:\Users\Tinumol>cd Desktop  
C:\Users\Tinumol\Desktop>cd javalab  
C:\Users\Tinumol\Desktop\javalab>javac PriorityQueue1.java  
C:\Users\Tinumol\Desktop\javalab>java PriorityQueue1  
head:Amit  
head:Amit  
iterating the queue elements:  
Amit  
Jai  
Karan  
Vijay  
Rahul  
after removing two elements:  
Karan  
Rahul  
Vijay  
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

### 35. Program to remove all the elements from a linked list

```
import java.util.*;

public class removelink
{
    public static void main(String[] args)
    {
        // create an empty linked list
        LinkedList<String> l_list = new LinkedList<String>();

        // use add() method to add values in the linked list

        l_list.add("violet");
        l_list.add("Green");
        l_list.add("Black");
        l_list.add("Pink");
        l_list.add("blue");

        // print the list
        System.out.println("The Original linked list: " + l_list);

        // Removing all the elements from the linked list
        l_list.clear();

        System.out.println("The New linked list: " + l_list);
    }
}
```

### OUTPUT

```
D:\MCA NOTES\Sem 2\Object Oriented Programming Lab\20-09-2021(Sr. Elsin)>javac removelink.java
D:\MCA NOTES\Sem 2\Object Oriented Programming Lab\20-09-2021(Sr. Elsin)>java removelink
The Original linked list: [violet, Green, Black, Pink, blue]
The New linked list: []
```

**RESULT :** The program has been executed and the output was verified.

### 36. program to demonstrate the addition and deletion of elements in deque

```
import java.util.*;

public class deque
{
    public static void main(String[] args)
    {
        Deque<String> deque = new LinkedList<String>();

        // We can add elements to the queue

        // in various ways

        // Add at the last

        deque.add("Element 1 (Tail)");

        // Add at the first

        deque.addFirst("Element 2 (Head)");

        // Add at the last

        deque.addLast("Element 3 (Tail)");

        // Add at the first

        deque.push("Element 4 (Head)");

        // Add at the last

        deque.offer("Element 5 (Tail)");

        // Add at the first

        deque.offerFirst("Element 6 (Head)");

        System.out.println(deque + "\n");

        // We can remove the first element

        // or the lastelement.
```

```
deque.removeFirst();  
deque.removeLast();  
  
System.out.println("Deque after removing " + "first and last: " + deque);  
}  
}
```

## OUTPUT

```
D:\java_lab>javac deque.java  
  
D:\java_lab>java deque  
[Element 6 (Head), Element 4 (Head), Element 2 (Head), Element 1 (Tail), Element 3 (Tail), Element 5 (Tail)]
```

**RESULT :** The program has been executed and the output was verified.

### 37. Maintain a list of Strings using ArrayList from collection framework, perform built-in operations.

```
import java.util.*;

class arrayjava{

public static void main(String args[]){

    ArrayList<String> alist=new ArrayList<String>();

    alist.add("appu");

    alist.add("ammu");

    alist.add("minnu");    alist.add("thomu");

    alist.add("pinky");    alist.add("Tom");

    //displaying elements

    System.out.println(alist);


    //Adding "appu" at the fourth position alist.add(3, "appu");

    //displaying elements

    System.out.println(alist);

} }
```

### OUTPUT

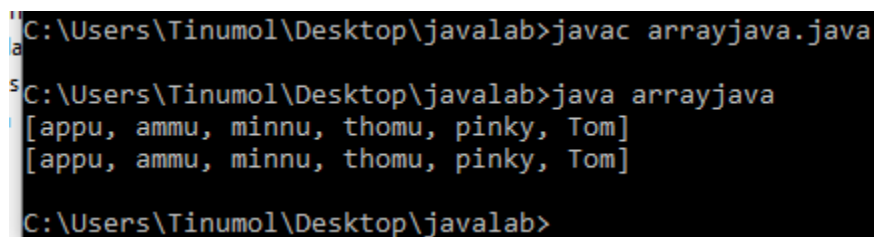

```
C:\Users\Tinumol\Desktop\javalab>javac arrayjava.java
C:\Users\Tinumol\Desktop\javalab>java arrayjava
[appu, ammu, minnu, thomu, pinky, Tom]
[appu, ammu, minnu, thomu, pinky, Tom]
C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.

### 38. Program to demonstrate the working of map interface by adding ,removing,changing.

```
import java.util.*;

class HashMapDemo {

    public static void main(String args[])    {

        Map<String, Integer> hm = new HashMap<String, Integer>();

        hm.put("Anu", new Integer(1));

        hm.put("sinu", new Integer(2));

        hm.put("Jinu", new Integer(3));

        // Traversing through the map

        for (Map.Entry<String, Integer> me : hm.entrySet()) {

            System.out.print(me.getKey() + ":");

            System.out.println(me.getValue());    }

    } }
```

### OUTPUT

```
D:\java_lab>javac hashmap.java

D:\java_lab>java hashmap
Jinu : 3
Anu  : 1
sinu : 2
```

**RESULT :** The program has been executed and the output was verified.

**39. program to convert hash map to tree map.**

```
import java.util.*;

import java.util.stream.*;

public class HT
{
    public static void main(String args[])
    {
        Map<String, String> map = new HashMap<>();

        map.put("1", "One");
        map.put("2", "Two");
        map.put("3", "Three");
        map.put("4", "Four");
        map.put("5", "Five");
        map.put("6", "Six");
        map.put("7", "Seven");
        map.put("8", "Eight");
        map.put("9", "Nine");

        System.out.println("HashMap = " + map);

        Map<String, String> treeMap = new TreeMap<>();

        treeMap.putAll(map);

        System.out.println("TreeMap (HashMap to TreeMap) " + treeMap);
    }
}
```

## OUTPUT

```
C:\Users\Tinumol\Desktop\javalab>javac Hashmaptree.java

C:\Users\Tinumol\Desktop\javalab>java Hashmaptree
HashMap = {1=One, 2=Two, 3=Three, 4=Four, 5=Five, 6=Six, 7=Seven, 8=Eight, 9=Nine}
TreeMap (HashMap to TreeMap) {1=One, 2=Two, 3=Three, 4=Four, 5=Five, 6=Six, 7=Seven, 8=Eight, 9=Nine}

C:\Users\Tinumol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.



#### 40. Program to list the sub directories and files in a given directory and also search for a file name.

```
import java.io.File;
import java.util.*;
import java.io.*;
public class p1 {
    public static final String RED="\033[0;31m";
    public static final String RESET="\033[0m";
    static void RecursivePrint(File[] arr, int index, int level, String search
for) {
        // exit condition
        if (index == arr.length)
            return;
        // space for internal level
        for (int i = 0; i < level; i++)
            System.out.print("\t");
        if(arr[index].getName().toLowerCase().contains(searchfor))
            System.out.print(RED);
        else
            System.out.print(RESET);
        // for files
        if (arr[index].isFile())
            System.out.println(arr[index].getName());
        else if (arr[index].isDirectory()) {
            System.out.println "[" + arr[index].getName() + "];
            RecursivePrint(arr[index].listFiles(), 0, level + 1, searchfor);
        }
        RecursivePrint(arr, ++index, level, searchfor);
    }
    public static void main(String[] args) {
        Scanner scan = new Scanner(System.in);
        System.out.println("Enter the directory path");
        String maindirpath = scan.nextLine();
        System.out.println("Enter the file/directory name to search");
        String searchfor = scan.nextLine();
```

```
File maindir = new File(maindirpath);
if (maindir.exists() && maindir.isDirectory()) {
File arr[] = maindir.listFiles();
System.out.println("#####
###");
System.out.println("Files from main directory" + maindir);
System.out.println("#####
###");
RecursivePrint(arr, 0, 0, searchfor.toLowerCase()); // array,index
,level,search
}
}
}
```

## OUTPUT

```
C:\Users\Tinumol\Desktop\javalab>javac p1.java

C:\Users\Tinumol\Desktop\javalab>java p1
Enter the directory path
downloads
Enter the file/directory name to search
index/downloads

C:\Users\Tinumol\Desktop\javalab>_
```

**RESULT :** The program has been executed and the output was verified.


**41. Write a program to write to a file, then read from the file and display the contents on the console.**

```
import java.io.FileReader;
import java.io.FileWriter;
import java.io.IOException;
import java.io.*;
import java.util.*;
import java.io.File;

class read {
    public static void main(String[] args) {
        String var = "";
        Scanner scan = new Scanner(System.in);
        System.out.println("Enter the text to create file : type exit to stop"
        );
        while (!var.endsWith("exit\n"))
            var = var + scan.nextLine()+"\n";
        try {
            File file = new File("output.txt");
            FileWriter fw = new FileWriter(file);
            fw.write(var);
            fw.close();
            System.out.println("Reading File content");
            FileReader fr = new FileReader("output.txt");
            String str = "";
            int i;
            while ((i = fr.read()) != -1) {
                // Storing every character in the string
                str += (char) i;
            }
            System.out.println(str);
            fr.close();
        } catch (IOException e) {
            System.out.println("There are some exception");
        }
    }
}
```

```
}  
}
```

## Output

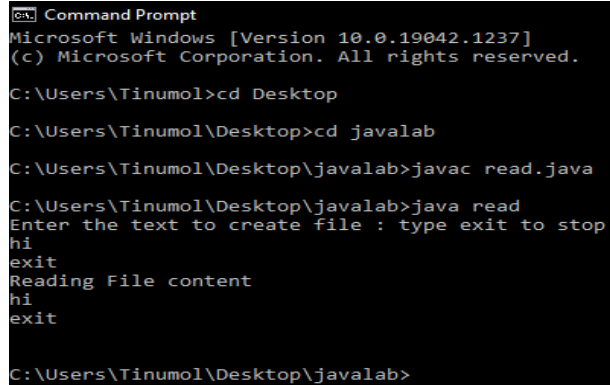

```
Command Prompt  
Microsoft Windows [Version 10.0.19042.1237]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Users\Tinamol>cd Desktop  
  
C:\Users\Tinamol\Desktop>cd javalab  
  
C:\Users\Tinamol\Desktop\javalab>javac read.java  
  
C:\Users\Tinamol\Desktop\javalab>java read  
Enter the text to create file : type exit to stop  
hi  
exit  
Reading File content  
hi  
exit  
  
C:\Users\Tinamol\Desktop\javalab>
```

**RESULT :** The program has been executed and the output was verified.