






ER SCHEMA AGGREGATION AND GENERALIZATION

Booking Superclass and its subclasses

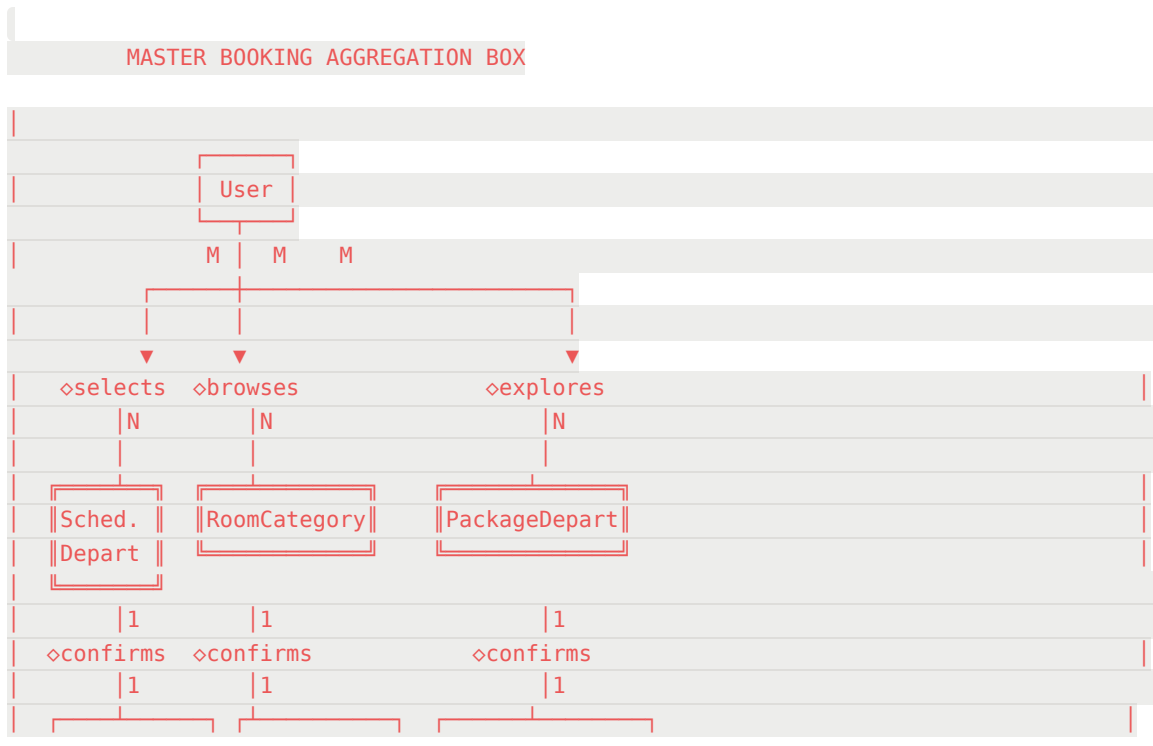

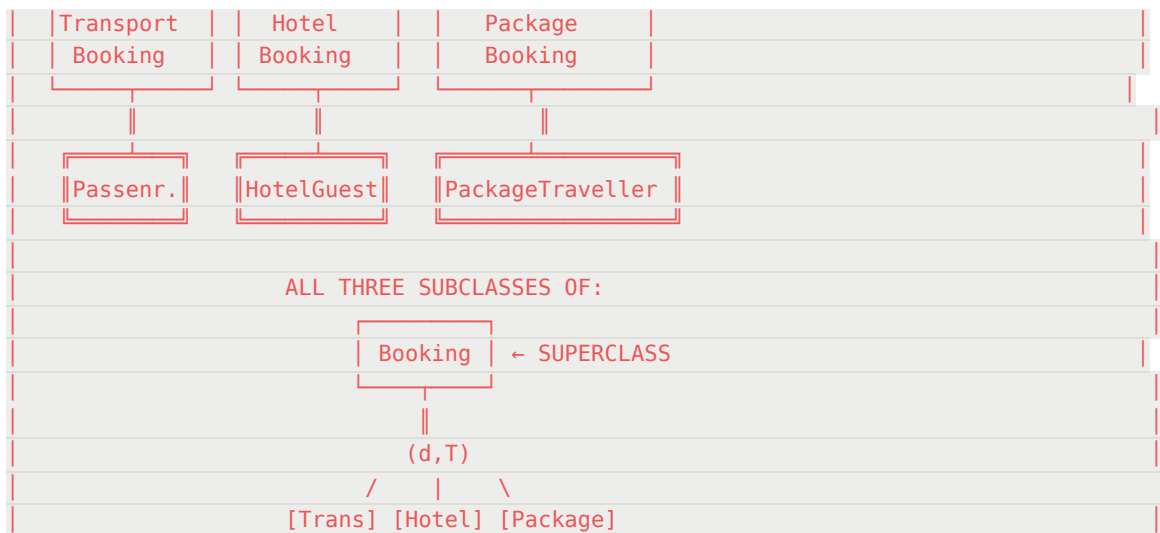

On booking superclass entity:

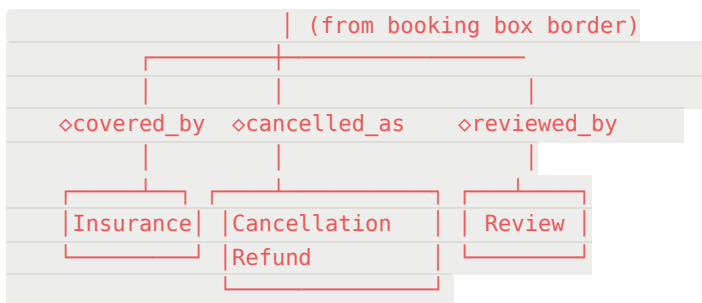

Three Aggregations :

The standard aggregation pattern taught:


A —◊ R — B
becomes one unit → then connects to C

Instead of just A and B making a relationship, we have THREE entities making relationships at two levels, and the whole thing gets boxed.

All Three Cases


Transport Aggregation

LEVEL 1 – Binary relationship first:



This captures: "User browsed and selected a specific flight slot (route + class + date combined)"

LEVEL 2 – Box that up, connect to result:

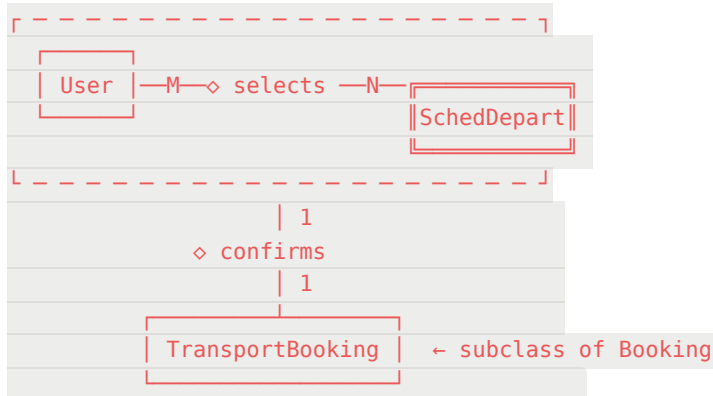

Why this makes sense in real life:

User searches Mumbai → Delhi, selects Economy on 15th March (that's **selects**). Then enters passenger details and pays (that's **confirms** → creates TransportBooking). Two distinct stages, not one atomic event.


Hotel Aggregation

LEVEL 1 – Binary relationship first:



This captures: "User searched city + dates + rooms and selected a specific room type at a specific hotel"

LEVEL 2 – Box that up, connect to result:

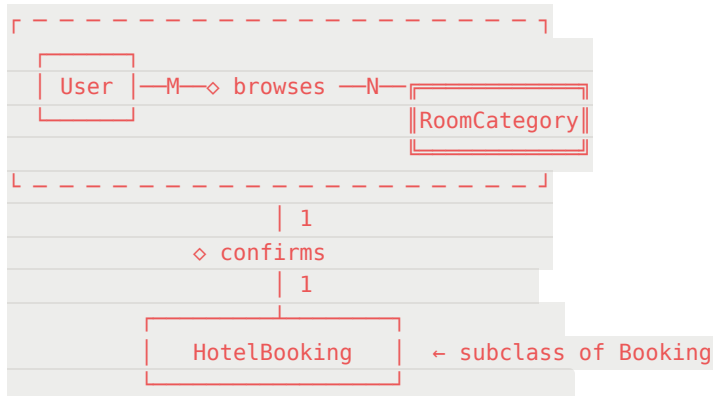


Why this makes sense in real life:

User searches Goa hotels for 20–23 March, 2 rooms, browses and picks Deluxe Sea View (that's **browses**). Then enters guest details and pays (that's **confirms** → creates HotelBooking with checkin/checkout dates, num_rooms stored here).

Package Aggregation

LEVEL 1 – Binary relationship first:



This captures: "User browsed packages and selected a specific departure slot of a specific package"

LEVEL 2 – Box that up, connect to result:

