

Matgeo 1-1.5-32

AI24BTECH11033-Tanishq Rajiv Bhujbale

November 5, 2024

1 Question

2 Solution

- Parameters
- Section formula
- Finding k
- Graph
- C Code
- Python Code
- Python Code

Question

Find the ratio in which the line segment joining the points $(1, -3)$ and $(4, 5)$ is divided by X axis.

Parameters

The parameters for the problem are given as follows:

points	values
A	$\begin{pmatrix} 1 \\ -3 \end{pmatrix}$
B	$\begin{pmatrix} 4 \\ 5 \end{pmatrix}$
C	$\begin{pmatrix} x \\ 0 \end{pmatrix}$

Section formula

If C divides AB in the ratio $k : 1$ By section formula

$$C = \frac{kB + A}{k + 1}$$


Finding k

Substituting A ,B and C in the formula

$$\begin{pmatrix} \frac{4.k+1}{k+1} \\ \frac{k.5-3}{k+1} \end{pmatrix} = \begin{pmatrix} x \\ 0 \end{pmatrix}$$
$$\frac{k.5-3}{k+1} = 0$$
$$k = \frac{3}{5} = 3 : 5$$

Graph

Line Segment AB and Intersection with X-axis

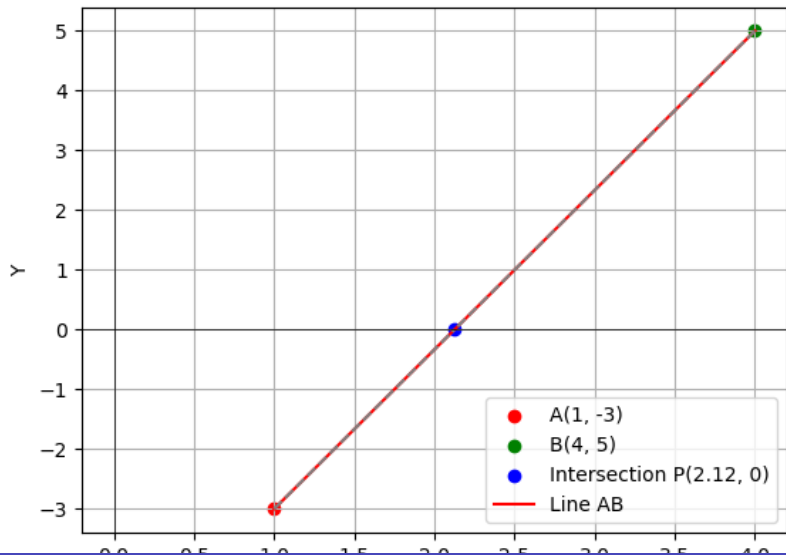

C Code

```
Terminal
#include <stdio.h>
#include <math.h>
#include "matfun.h"
#include "geofun.h"

int main() {
    // Coordinates of points A(1, -3) and B(4, 5)
    double **A = createMat(2, 1);
    double **B = createMat(2, 1);

    A[0][0] = 1; // X-coordinate of point A
    A[1][0] = -3; // Y-coordinate of point A

    B[0][0] = 4; // X-coordinate of point B
    B[1][0] = 5; // Y-coordinate of point B

    // Calculate the ratio using the section formula
    // X-axis divides the line at Y = 0, find the ratio k
    double k = -A[1][0] / (B[1][0]);

    printf("The ratio in which the X-axis divides the line segment is: %.2f\n", k);

    // Calculate the point where the line intersects the X-axis
    double **P = Matsec(A, B, 2, k);

    printf("The point of intersection with the X-axis is: (%.2f, %.2f)\n", P[0][0], P[1][0]);

    // Free memory allocated for matrices
    freeMat(A, 2);
    freeMat(B, 2);
    freeMat(P, 2);

    return 0;
}
```

EE1030/1/codes/1.c 25,0-1 All

Python Code

```
tanishq@tanishq-Victus-by-HP-Gaming-Laptop-16-s0xxx: ~/EE1030/1/codes
from ctypes import *

# Load the shared object file (make sure it's in the same directory as the script)
ratio_lib = CDLL('./1.so')

# Define the function signatures for the C functions used
ratio_lib.createMat.argtypes = [c_int, c_int]
ratio_lib.createMat.restype = POINTER(POINTER(c_double))

ratio_lib.Matsec.argtypes = [POINTER(POINTER(c_double)), POINTER(POINTER(c_double)), c_int, c_double]
ratio_lib.Matsec.restype = POINTER(POINTER(c_double))

ratio_lib.freeMat.argtypes = [POINTER(POINTER(c_double)), c_int]

# Prepare the arguments for points A and B
# Create matrices for A and B
A = ratio_lib.createMat(2, 1)
B = ratio_lib.createMat(2, 1)

# Set coordinates for points A(1, -3) and B(4, 5)
A[0][0] = c_double(1)
A[1][0] = c_double(-3)

B[0][0] = c_double(4)
B[1][0] = c_double(5)

# Calculate the ratio k
k = -A[1][0] / (B[1][0])
print("The ratio in which the X-axis divides the line segment is: k = {:.2f}".format(k))

# Calculate the intersection point using Matsec
P = ratio_lib.Matsec(A, B, 2, k)

# Print the point of intersection
print("The point of intersection with the X-axis is: (%.2f, %.2f)" % (P[0][0], P[1][0]))

# Free allocated memory
ratio_lib.freeMat(A, 2)
ratio_lib.freeMat(B, 2)
ratio_lib.freeMat(P, 2)

# Now visualize the result with Matplotlib
import numpy as np

1.py
```

43,1

Top

Python Code

```
tanishq@tanishq-Victus-by-HP-Gaming-Laptop-16-s0xxx: ~/EE1030/1/codes
import numpy as np
import matplotlib.pyplot as plt

# Coordinates of points A and B
A_coors = np.array([A[0][0], A[1][0]])
B_coors = np.array([B[0][0], B[1][0]])

# Intersection point
P_coors = np.array([P[0][0], P[1][0]])

# Plot the line segment and its division point on the X-axis
plt.figure()

# Plot points A, B, and the intersection point P
plt.scatter(*A_coors, color='r', label='A(1, -3)')
plt.scatter(*B_coors, color='g', label='B(4, 5)')
plt.scatter(*P_coors, color='b', label=f'Intersection P({P_coors[0]:.2f}, 0)')

# Plot the line segment AB
plt.plot([A_coors[0], B_coors[0]], [A_coors[1], B_coors[1]], color='r', label='Line AB')

# Plot the dashed lines from A and B to the intersection point
plt.plot([A_coors[0], P_coors[0]], [A_coors[1], P_coors[1]], color='gray', linestyle='dashed')
plt.plot([B_coors[0], P_coors[0]], [B_coors[1], P_coors[1]], color='gray', linestyle='dashed')

# Labeling the plot
plt.axhline(0, color='black', linewidth=0.5)
plt.axvline(0, color='black', linewidth=0.5)
plt.title('Line Segment AB and Intersection with X-axis')
plt.xlabel('X')
plt.ylabel('Y')
plt.legend()
plt.grid(True)

plt.show()
```

1.py 58,1 Bot