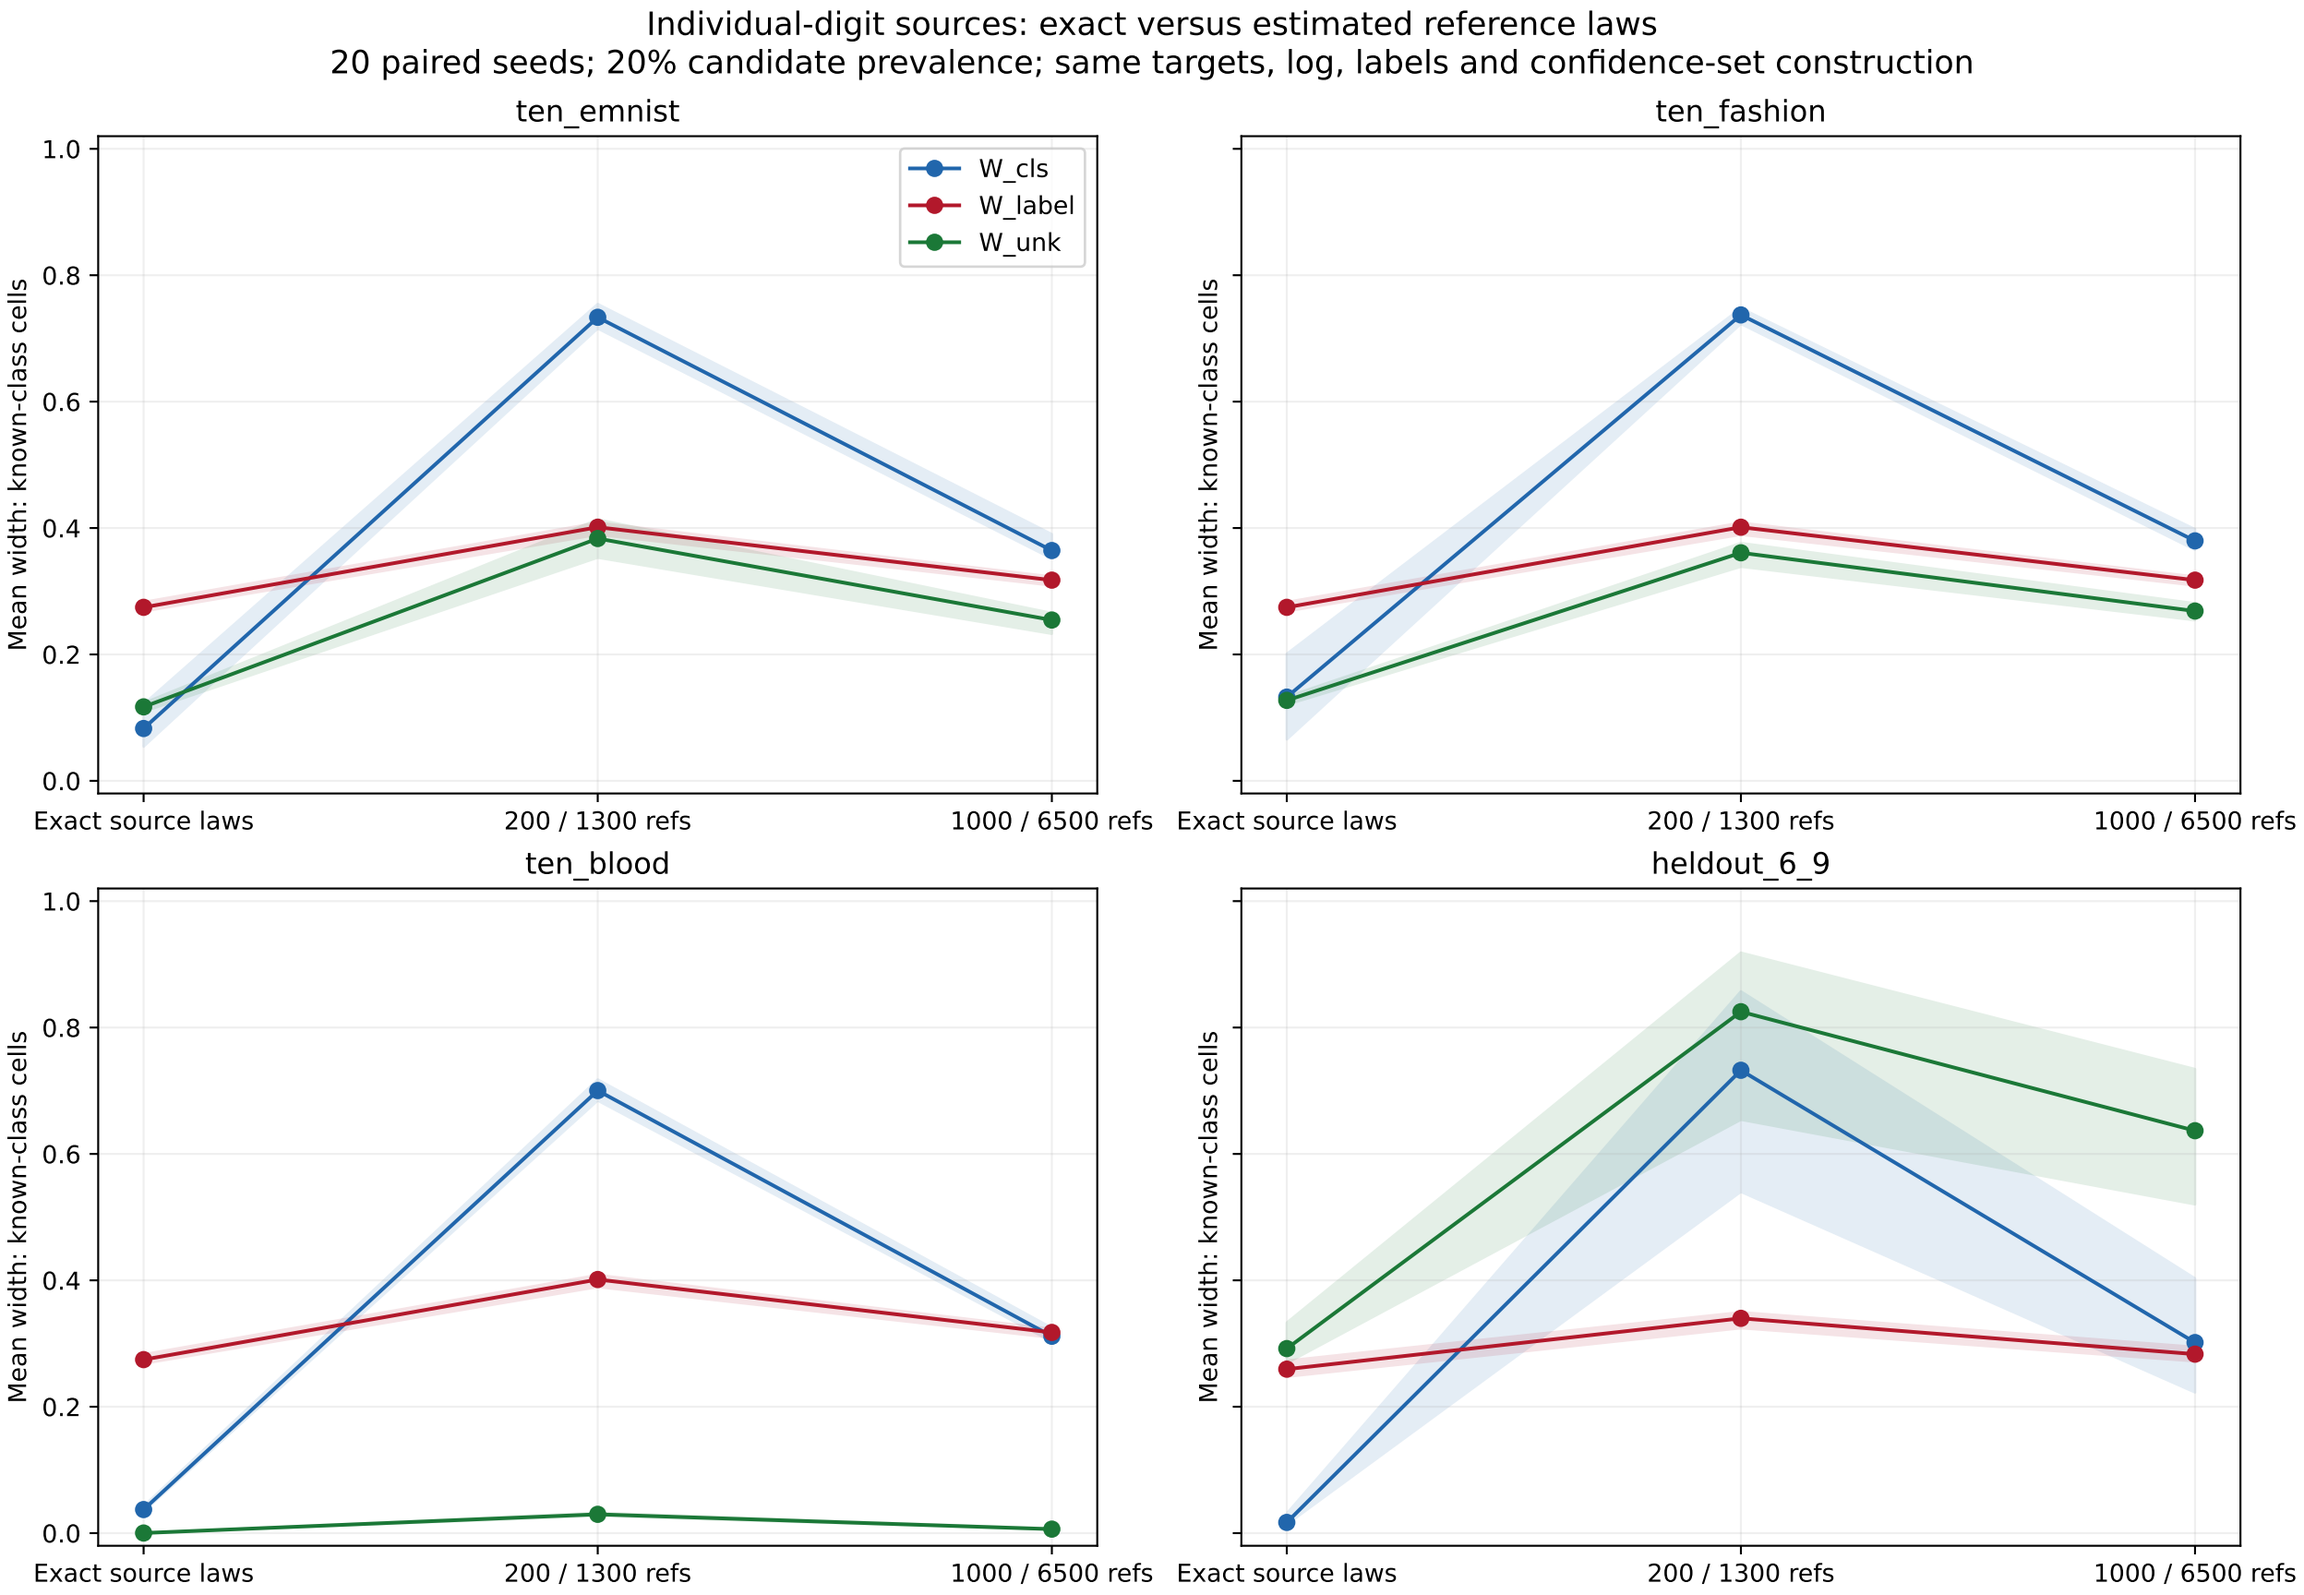
Individual-digit sources: exact versus estimated reference laws
20 paired seeds; 20% candidate prevalence; same targets, log, labels and confidence-set construction
ten_emnist
ten_fashion
ten_blood
heldout_6_9
W_cls
W_label
W_unk
Mean width: known-class cells
0.0
0.2
0.4
0.6
0.8
1.0
Exact source laws
200 / 1300 refs
1000 / 6500 refs