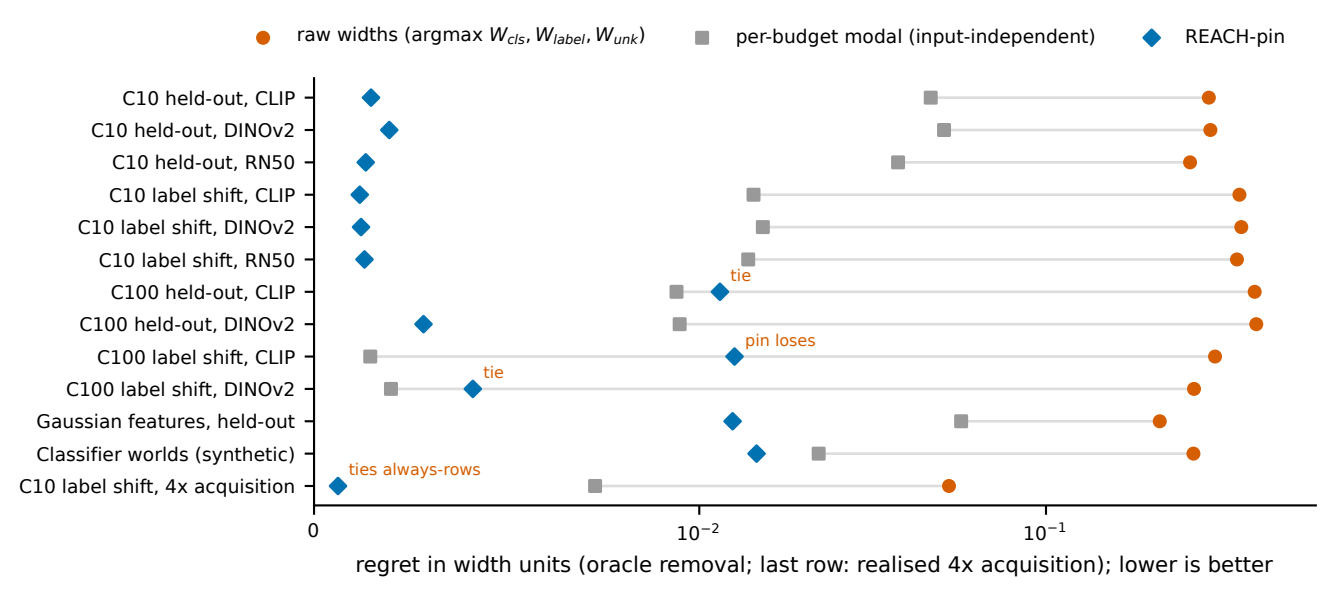
raw widths (argmax $W_{cls}, W_{label}, W_{unk}$)
per-budget modal (input-independent)
REACH-pin
C10 held-out, CLIP
C10 held-out, DINOv2
C10 held-out, RN50
C10 label shift, CLIP
C10 label shift, DINOv2
C10 label shift, RN50
C100 held-out, CLIP
C100 held-out, DINOv2
C100 label shift, CLIP
C100 label shift, DINOv2
Gaussian features, held-out
Classifier worlds (synthetic)
C10 label shift, 4x acquisition
tie
pin loses
tie
ties always-rows
0
10^{-2}
10^{-1}
regret in width units (oracle removal; last row: realised 4x acquisition); lower is better