Unit 5 e-Portfolio Activity: Jaccard Distance/Dissimilarity Calculations

Introduction

The brief asks for three Jaccard distances from a table of pathological test results. The harder question is what a zero means, because Jaccard ignores features on which both people score zero.

Data preparation

Following the brief, Y and P became 1, N and A became 0, and Name and Gender were left out. For each pair, f11 counts features positive for both people, f10 and f01 those positive for one only, and f00 those negative for both (University of Essex Online, 2026). Jaccard distance, one minus Jaccard's (1912) coefficient, is (f10 + f01) / (f11 + f10 + f01), so f00 plays no part (Han, Kamber and Pei, 2012).

Results

The distances are 1/3 ≈ 0.33 for (Jack, Mary), 2/3 ≈ 0.67 for (Jack, Jim) and 3/4 = 0.75 for (Jim, Mary), as in the brief (Table 2).

What the answer depends on

The brief does not define A; it may mean 'not tested'. Excluding, for each pair, any feature where either person has A leaves all three Jaccard distances unchanged, but only because every A in this table meets a 0. An A opposite a P would count as a mismatch under the brief's zero coding but would drop out under this exclusion, so the two policies could then disagree. Simple-matching distance, which counts shared zeros (University of Essex Online, 2026), changes for every pair (Table 3). Kim, Shin and Jeong (2022) chose Jaccard for Korean insurance claims for a related reason: not being treated is not the same as not having a disease. Where zeros are real negatives, counting them may help: measures that do so performed better on Indonesian and Japanese herbal medicine data (Wijaya et al., 2016).

As a sensitivity assumption, not a clinical choice, adding Gender as one equally weighted symmetric feature, in the mixed form of Gower (1971) and Han, Kamber and Pei (2012), gives (f10 + f01 + g) / (f11 + f10 + f01 + 1), where g is 1 if the genders differ. (Jack, Mary) and (Jack, Jim) then tie at 0.50, so Jack's nearest match depends on whether Gender counts.

Implications

If these profiles represented identifiable real individuals, they would contain health data, which EU and Chinese law protect as a special or sensitive category (*Regulation (EU) 2016/679*, 2016, art. 9; *Personal Information Protection Law of the People's Republic of China 2021*, art. 28). Removing the names would not by itself make the table anonymous: Mary is the only F, so she could be singled out or linked if other identifying information were available (*Regulation (EU) 2016/679*, 2016, recital 26). Leaving Gender out does not guarantee fairness either (Dwork et al., 2012).

Conclusion

These are worked sensitivity checks on three people, not clinical validation. Before using such distances for clustering, I would confirm what A means and record which attributes and which measure the intended use justifies.

Evidence

Table 1: The brief's table and its coding (1 = Y or P; 0 = N or A). Name and Gender are not used in the Jaccard distance.

Name	Gender	Fever	Cough	Test-1	Test-2	Test-3	Test-4
Jack	M	Y (1)	N (0)	P (1)	N (0)	N (0)	A (0)
Mary	F	Y (1)	N (0)	P (1)	A (0)	P (1)	N (0)
Jim	M	Y (1)	P (1)	N (0)	N (0)	N (0)	A (0)


Table 2: Counts and Jaccard distance for each pair. In my notebook run, the count formula, Python sets and SciPy gave the same values.

Pair	Shared positives	f11	f10	f01	f00	Distance
(Jack, Mary)	Fever, Test-1	2	0	1	3	1/3 ≈ 0.33
(Jack, Jim)	Fever	1	1	1	3	2/3 ≈ 0.67
(Jim, Mary)	Fever	1	1	2	2	3/4 = 0.75

Table 3: Sensitivity checks. ‘A missing’ excludes, for each pair, any feature where either person has A. Simple-matching distance divides mismatches by all features compared. With Gender uses (f10 + f01 + g) / (f11 + f10 + f01 + 1), with equal weights as a sensitivity assumption.

Pair	Jaccard	Jaccard, A missing	Simple-matching distance	Simple-matching distance, A missing	With Gender
(Jack, Mary)	0.33	0.33	0.17	0.25	0.50
(Jack, Jim)	0.67	0.67	0.33	0.40	0.50
(Jim, Mary)	0.75	0.75	0.50	0.75	0.80

Figure 1: The six features coded 1 or 0 (left) and the Jaccard distance matrix (right), from my notebook run in Google Colab on 30 October 2026 at 18:44 UTC. Notebook: https://github.com/Tanky0/Tanky0.github.io/blob/main/assets/documents/ML_Unit05_Jaccard_Notebook.ipynb

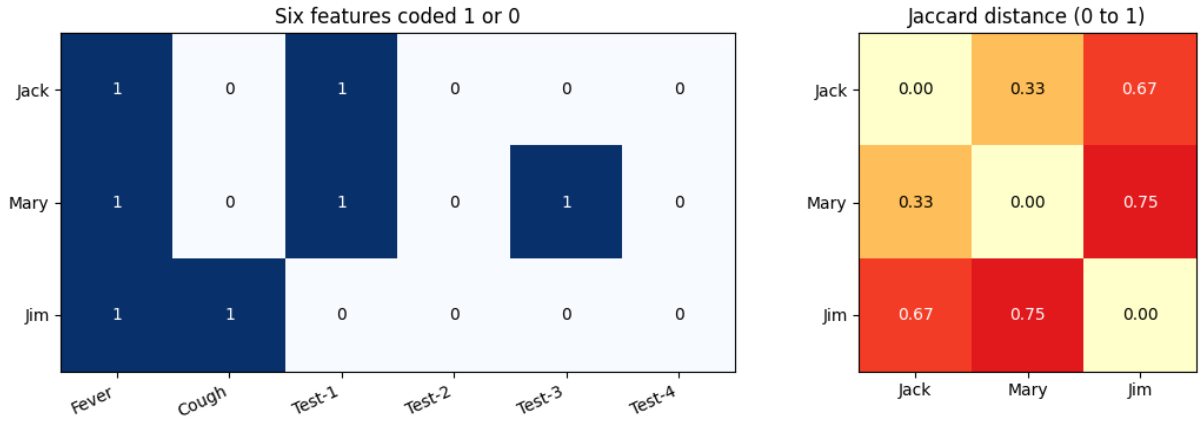

References

Dwork, C. et al. (2012) ‘Fairness through awareness’, in *Proceedings of the 3rd Innovations in Theoretical Computer Science Conference*. New York: ACM, pp. 214–226. Available at: https://doi.org/10.1145/2090236.2090255

Gower, J.C. (1971) ‘A general coefficient of similarity and some of its properties’, *Biometrics*, 27(4), pp. 857–871. Available at: https://doi.org/10.2307/2528823

Han, J., Kamber, M. and Pei, J. (2012) *Data Mining: Concepts and Techniques*. 3rd edn. Waltham: Morgan Kaufmann.

Jaccard, P. (1912) ‘The distribution of the flora in the alpine zone’, *New Phytologist*, 11(2), pp. 37–50. Available at: https://doi.org/10.1111/j.1469-8137.1912.tb05611.x

Kim, H.J., Shin, S.Y. and Jeong, S.H. (2022) ‘Nature and extent of physical comorbidities among Korean patients with mental illnesses: pairwise and network analysis based on health insurance claims data’, *Psychiatry Investigation*, 19(6), pp. 488–499. Available at: https://doi.org/10.30773/pi.2022.0068

Personal Information Protection Law of the People’s Republic of China 2021. China. Available at: http://en.npc.gov.cn.cdurl.cn/2021-12/29/c_694559.htm (Accessed: 30 October 2026).

Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 on the protection of natural persons with regard to the processing of personal data and on the free movement of such data, and repealing Directive 95/46/EC (General Data Protection Regulation) (2016) *Official Journal* L 119, 4 May, pp. 1–88. Available at: https://eur-lex.europa.eu/eli/reg/2016/679/oj/eng (Accessed: 30 October 2026).

University of Essex Online (2026) ‘Unit 5 Lecturecast: Clustering’ [Lecturecast]. ML_PCOM7E: Machine Learning October 2026. University of Essex Online. Available at: https://www.my-course.co.uk/mod/scorm/view.php?id=1434575 (Accessed: 25 October 2026).

Wijaya, S.H. et al. (2016) ‘Finding an appropriate equation to measure similarity between binary vectors: case studies on Indonesian and Japanese herbal medicines’, *BMC Bioinformatics*, 17, 520. Available at: https://doi.org/10.1186/s12859-016-1392-z

AI Acknowledgement

Codex was used to assist in identifying appropriate code solutions and to proofread and refine the code I produced. Claude and Grammarly supported proofreading, language refinement, and formatting of my written text. All final decisions, analyses, interpretations, conclusions, and recommendations are my own.