

DSA3050A – MID-SEMESTER PRACTICAL EXAMINATION

Power BI Business Intelligence Project

Student Name: Tanveer

Student ID: 752


Dataset Source: Kaggle

Dataset Used: UK Car Accidents 2005–2015

Dataset URL: <https://www.kaggle.com/datasets/silicon99/uk-car-accidents-2005-2015>

SECTION 1 :PROCESS EVIDENCE

Dataset Sourcing Evidence

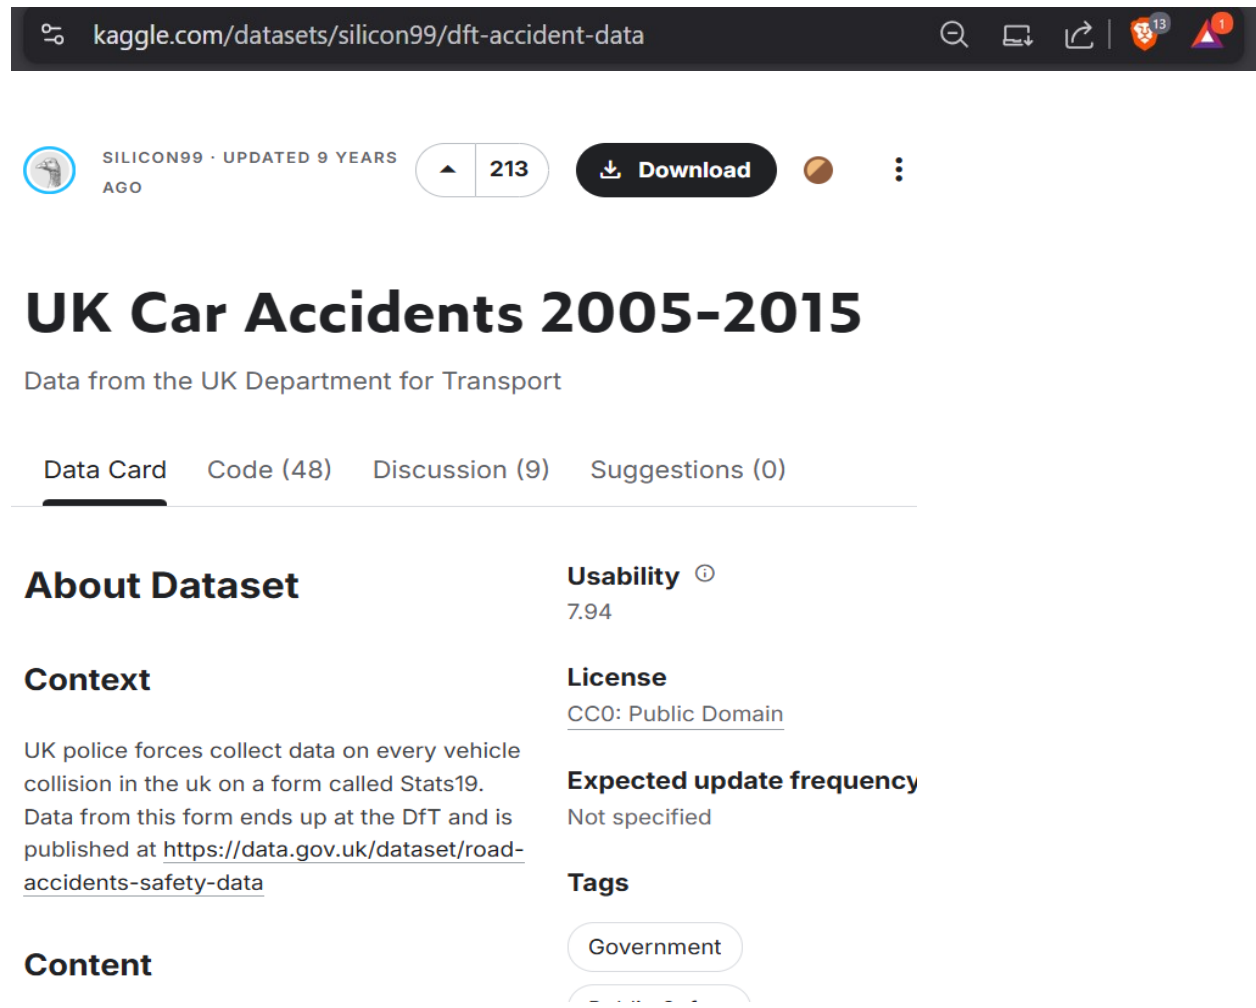

The screenshot shows the Kaggle dataset page for 'UK Car Accidents 2005-2015' by Silicon99. The page includes a browser address bar with the URL 'kaggle.com/datasets/silicon99/dft-accident-data'. Below the browser bar, the dataset title 'UK Car Accidents 2005-2015' is displayed, along with the source 'Data from the UK Department for Transport'. The page has tabs for 'Data Card', 'Code (48)', 'Discussion (9)', and 'Suggestions (0)'. The 'Data Card' tab is active. The 'About Dataset' section contains a 'Context' paragraph and a 'Content' section. The 'Usability' section shows a score of 7.94. The 'License' section shows 'CC0: Public Domain'. The 'Expected update frequency' section shows 'Not specified'. The 'Tags' section shows 'Government'.

UK Car Accidents 2005-2015
Data from the UK Department for Transport

Data Card Code (48) Discussion (9) Suggestions (0)

About Dataset

Context

UK police forces collect data on every vehicle collision in the uk on a form called Stats19. Data from this form ends up at the DfT and is published at <https://data.gov.uk/dataset/road-accidents-safety-data>

Content

Usability ⓘ
7.94

License
[CC0: Public Domain](#)

Expected update frequency
Not specified

Tags
Government

Why This Dataset Was Selected

This dataset satisfies all exam requirements:

- Real-world government data (UK Department for Transport)
 - Multiple related tables
 - Over 1.7 million accident records
 - Contains:
 - Date variables
 - Categorical variables (Severity, Police Force, Road Type)
 - Numerical variables (Vehicles, Casualties)
 - Geographic coordinates (Latitude, Longitude)
 - Supports meaningful analytical storytelling in public safety
-

Dataset Structure Overview

The dataset contains three primary tables:

1. Accidents0515.csv
 - One row per accident
 - Primary Key: Accident_Index
2. Vehicles0515.csv
 - Multiple vehicles per accident
 - Foreign Key: Accident_Index
3. Casualties0515.csv
 - Multiple casualties per accident
 - Foreign Key: Accident_Index

This structure naturally supports a star schema model.

PART A : POWER QUERY (20 Marks)

Dataset Loading Process

Before:


Accidents0515.csv

File Origin: 65001: Unicode (UTF-8) | Delimiter: Comma | Data Type Detection: Based on first 200 rows

Accident_Index	Location_Easting_OSGR	Location_Northing_OSGR	Longitude	Latitude	Police_Force	Accident_Severity	Number_of_Casualties
2005011800001	525680	178240	-0.19117	51.488098	1	1	2
2005011800002	5245170	183850	-0.211708	51.526075	1	1	3
2005011800003	524520	182240	-0.206450	51.525203	1	1	3
2005011800004	526900	177530	-0.173862	51.482442	1	1	3
2005011800005	528060	179040	-0.156618	51.495752	1	1	3
2005011800006	524770	181160	-0.201238	51.51554	1	1	3
2005011800007	524220	180830	-0.211277	51.512695	1	1	3
2005011800009	525880	179710	-0.187623	51.50229	1	1	3
2005011800010	527390	179650	-0.187942	51.48142	1	1	3
2005011800011	524550	186810	-0.206312	51.512443	1	1	3
2005011800012	526240	178900	-0.182872	51.494902	1	1	3
2005011800014	526170	177690	-0.184312	51.484044	1	1	3
2005011800015	525590	178520	-0.192366	51.493632	1	1	3
2005011800016	527990	178690	-0.157753	51.493622	1	1	3
2005011800017	526700	178970	-0.176224	51.495429	1	1	3
2005011800018	526460	177460	-0.18022	51.483912	1	1	3
2005011800019	524680	179450	-0.205139	51.500291	1	1	2
2005011800020	527000	179020	-0.171887	51.495811	1	1	3
2005011800021	527810	178010	-0.16059	51.485552	1	1	3
2005011800022	526790	178980	-0.174925	51.495498	1	1	2

Extract Table Using Examples | Load | Transform Data | Cancel

After:

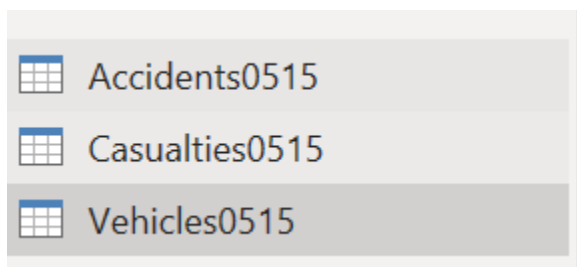


All three datasets were imported and prepared using Power Query.

ACCIDENTS TABLE TRANSFORMATIONS

Issue 1 : Date Not Proper Date Type

Column: Date

BEFORE:

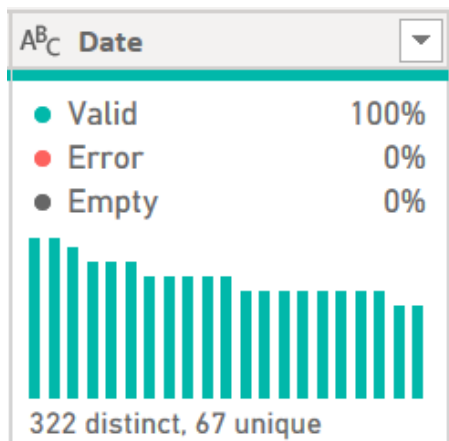


Problem:

Cannot perform time intelligence calculations if stored as text.

PROCESS:

Transform → Data Type → Date



Change Type with Locale

Change the data type and select the locale of origin.

Data Type


Date

Locale

English (United Kingdom)

AFTER:


Date column correctly formatted

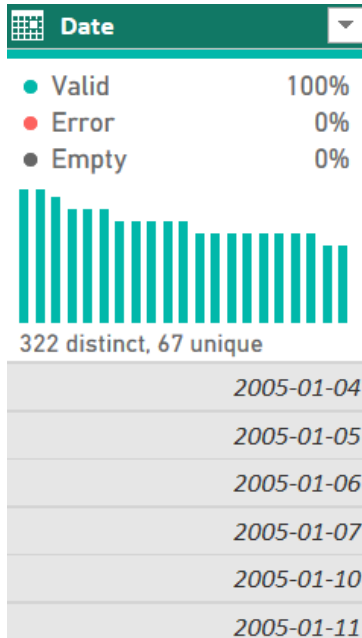


Issue 2 : Extract Year, Month, Quarter

PROCESS:

Date extraction menu:

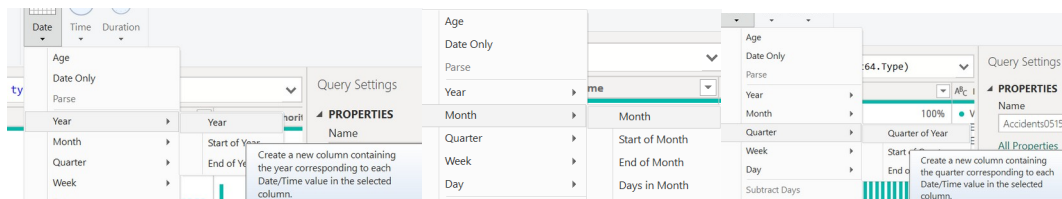

AFTER:

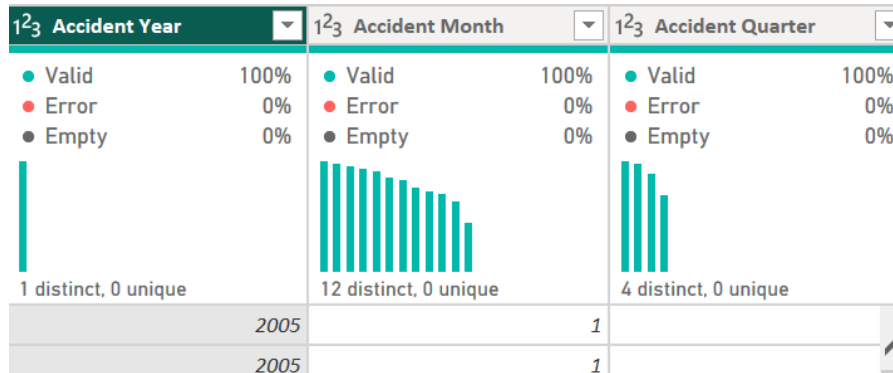

Justification:

Extracting these date components enables trend analysis by year, seasonal patterns by month, and quarterly performance reporting in the dashboard.

Issue 3 : Duplicate Validation

Primary Key: Accident_Index

PROCESS:

Group By

Specify the column to group by and the desired output.

☒ Basic ☐ Advanced

Accident_Index

New column name


counts

Operation

Count Rows

Column

Remove Duplicates on Accident_Index



We can see no duplicate values.


Confirmation that each unique identifier only appears once. Ensures data integrity.

Issue 4 : Handling Missing Values


BEFORE:

Since my data has 1.7 Million Data points and took more than 15 minutes to load on Power Bi i used Vscod to search for missing values

On power bi

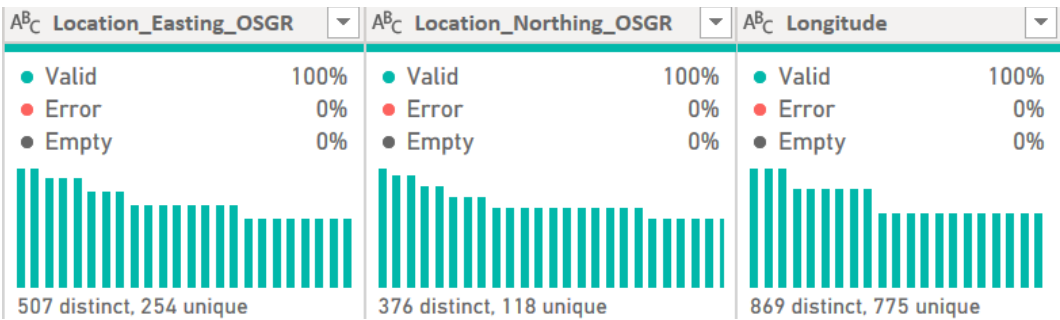


However on VS Code using Data Wrangler

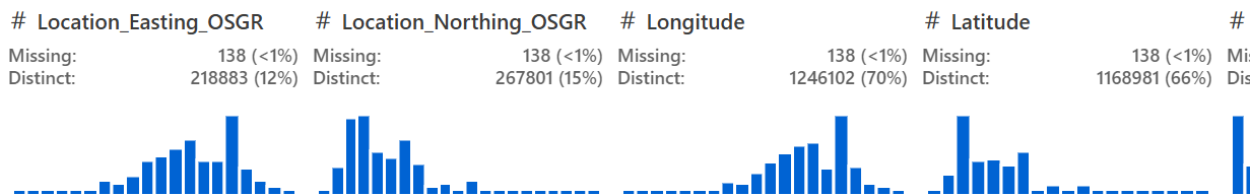


We can clearly see missing values in geographical data, and since it is important for map visuals, i will go ahead and use power Bi to clean it

PROCESS:

I chose to remove null values

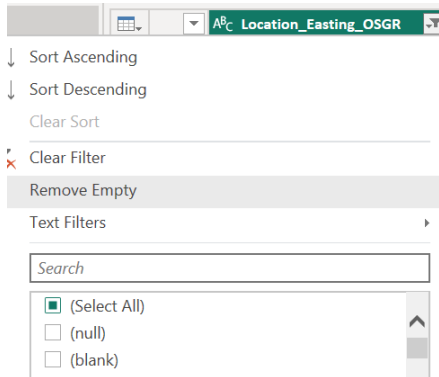

AFTER:

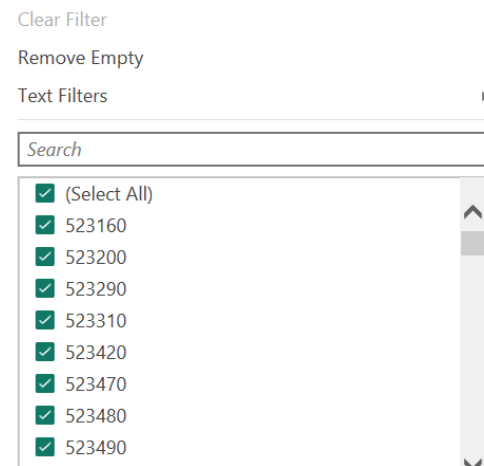

The Empty Field has disappeared now, confirming there are no more null values or blank values

Issue 5 : Standardizing Categorical Fields

Accident_severity

The numbers aren't very descriptive for visualizations, i will code them better for better visuals


Codes:

1 = Fatal

2 = Serious

3 = Slight

BEFORE:

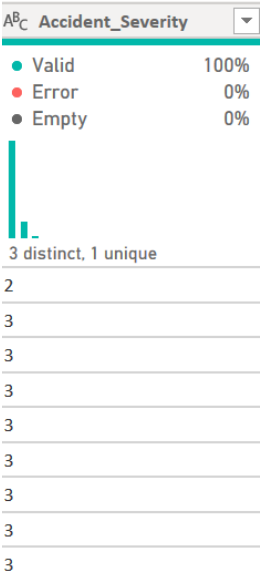

PROCESS:

Replace values:
1 = Fatal
2 = Serious
3 = Slight

Replace Values

Replace one value with another in the selected columns.

Value To Find

1

Replace With

Fatal

Advanced options

Replace Values

Replace one value with another in the selected columns.

Value To Find

2

Replace With

Serious

Advanced options

Replace Values

Replace one value with another in the selected columns.

Value To Find


3

Replace With

Slight

Advanced options

AFTER:

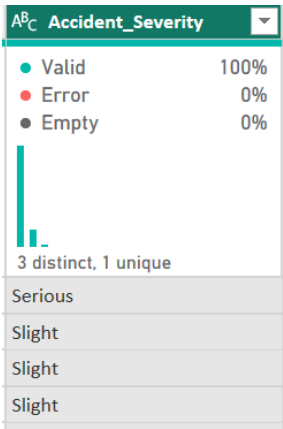

This improves dashboard readability.

Decoding severity codes improves dashboard readability and makes filters intuitive for Visualization later, as you will see in my Dashboard


Issue 6 : Removing Unnecessary Columns

Remove:

- Location_Easting_OSGR
- Location_Northing_OSGR
- Technical identifiers not needed


BEFORE:

These are not needed for my calculation or Analysis

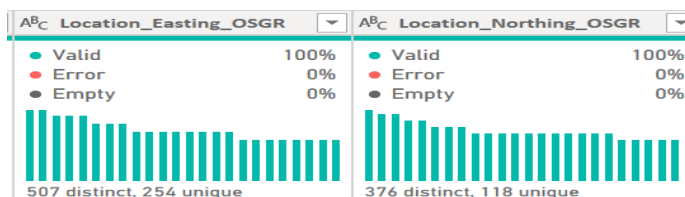


PROCESS:

Removing Columns

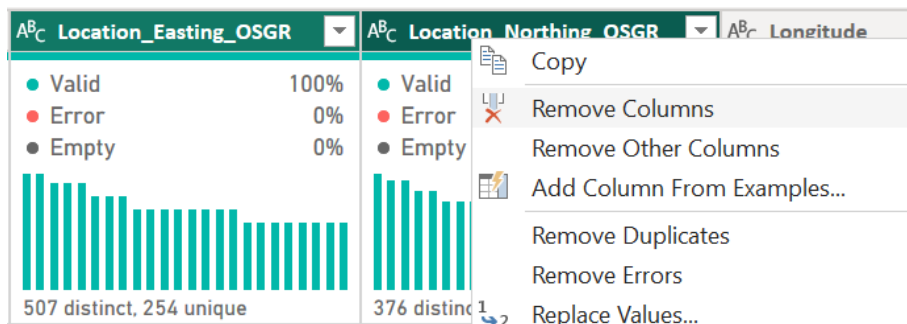

AFTER:



Improves performance as the data is already way too massive and early visualizations took too long.

Renaming Query Professionally

This process helps distinguish between dimension tables and fact tables and will be useful when modeling relationships.

Accidents0515 → DIM_Accidents

Vehicles0515 → Fact_Vehicles

Casualties0515 → Fact_Casualties

Before rename:

	Accidents0515
	Casualties0515
	Vehicles0515

After rename:

	DIM_Accidents
	Fact_Casualties
	Fact_Vehicles

Applied Steps Evidence:

This table contains 10 + applied steps, exceeding minimum requirement.


APPLIED STEPS	
Source	
Promoted Headers	
Trimmed Text	
Cleaned Text	
Changed Type with Locale	
Changed Type	
Inserted Year	
Inserted Month	
Inserted Quarter	
Renamed Columns	
Filtered Rows	
Filtered Rows1	
Filtered Rows2	
Filtered Rows3	
Replaced Value	
Replaced Value1	
Replaced Value2	
Removed Columns	

VEHICLES TABLE TRANSFORMATIONS

Issue 1 : Duplicate Validation


Primary Key: Accident_Index

BEFORE:




PROCESS:

Removing Duplicates on Accident_Index

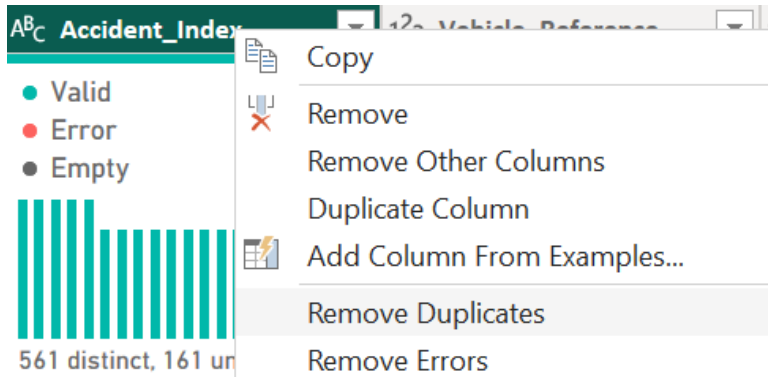

AFTER:




No duplicates Remain. This ensures data integrity.

Issue 2 : Handling Missing Values

Column: Age of Driver

Age of driver contains -1 , which are normally not realistic, will first convert -1 as null and then remove values

BEFORE:

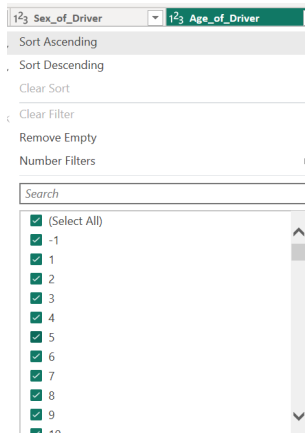

Problem: Unreasonable Data

PROCESS:

Replace Values


Replace one value with another in the selected columns.

Value To Find

-1

Replace With


null



I removed rows with missing null which were originally -1



AFTER:



Now the data does not contain values with -1


STEP 3 : Standardize Vehicle Type Codes

Vehicle_Type contains numeric codes.

Convert to readable categories:

- 1 = Pedal Cycle
- 2 = Motorcycle
- 9 = Car

BEFORE:

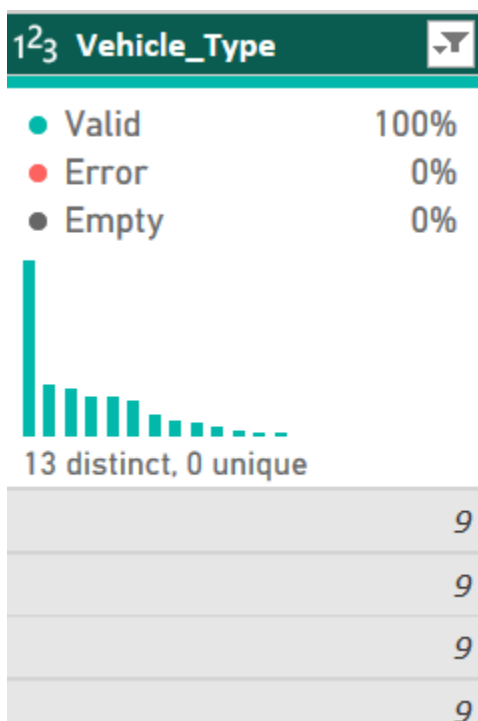

PROCESS:

I decided on replacing Values to make the data categorical for better visualization

Replace Values	Replace Values	Replace Values
Replace one value with another in the selected columns.	Replace one value with another in the selected columns.	Replace one value with another in the selected columns.
Value To Find 1	Value To Find 2	Value To Find 9
Replace With pedal cycle	Replace With motorcycle	Replace With car
Advanced options	Advanced options	Advanced options

AFTER:

☒ (Select All)

☒ car

☒ motorcycle

☒ pedal cycle

Justification:

I Believe this improves dashboard clarity.

STEP 5 : Create Derived Column: Driver Age Group

The logic I used to create the column:

Add Column → Custom Column

if [Age_of_Driver] < 25 then "Under 25"


else if [Age_of_Driver] < 45 then "25–44"

else if [Age_of_Driver] < 65 then "45–64"

else "65+"

BEFORE:

Only Numeric values

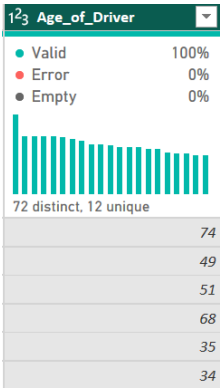

PROCESS:

Add Conditional Column

Add a conditional column that is computed from the other columns or values.

New column name

Driver Age Group

	Column Name	Operator	Value		Output
If	Age_of_Driver	is less than	25	Then	Under 25
Else If	Age_of_Driver	is less than	45	Then	25-44
Else If	Age_of_Driver	is less than	65	Then	45-64

Add Clause


Else

65+

OK

Cancel

AFTER:

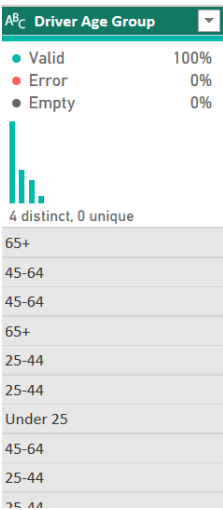


Justification:

This supports demographic analysis.

STEP 6 : Remove Unnecessary Columns


I removed the following:

- 1st_Point_of_Impact
- Driver_IMD_Decile
- Journey_Purpose_of_driver


PROCESS:**Justification:**

This reduces the data-frame and improves efficiency of the system

It also improves model efficiency.

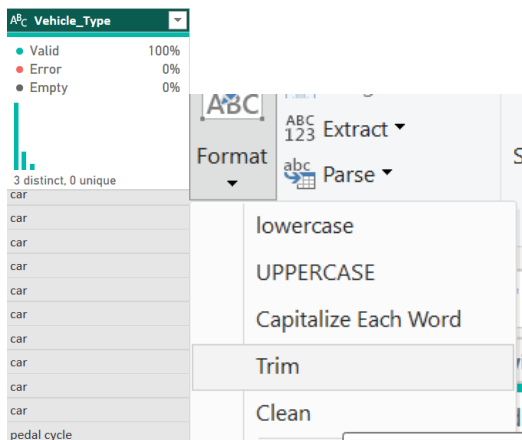STEP 7 : Trim & Clean Text Columns**BEFORE:**

AFTER:

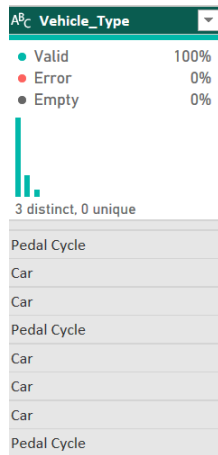

STEP 9 : Final Applied Steps Screenshot

This table contains more than 10 applied steps, exceeding minimum requirement.


APPLIED STEPS	
Source	⚙
Promoted Headers	⚙
Changed Type	
Removed Duplicates	
Replaced Value	⚙
Filtered Rows	
Changed Type1	
Replaced Value1	⚙
Replaced Value2	⚙
Replaced Value3	⚙
Added Custom	⚙
Changed Type2	
Removed Columns	
Trimmed Text	
Cleaned Text	
✕ Capitalized Each Word	

FACT_CASUALTIES TABLE TRANSFORMATIONS


STEP 1 : Remove Duplicates

Unique key: Accident_Index


BEFORE:



PROCESS:

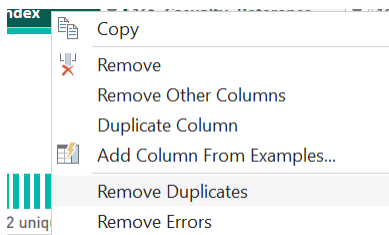

AFTER:

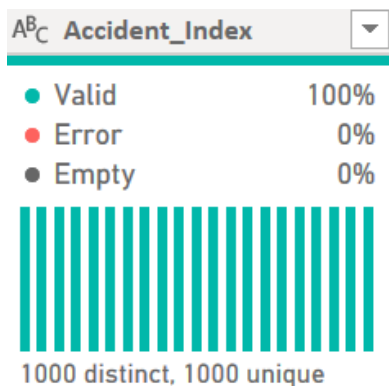


STEP 2 : Standardized Gender Codes

Columns: Sex_of_Casualty

Male = 1

Female = 2

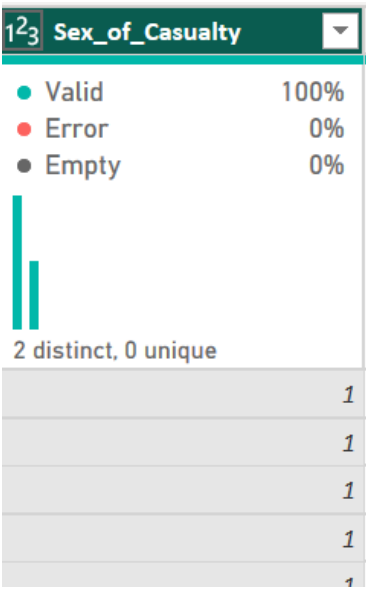

PROCESS:

Replace Values

Replace one value with another in the selected columns.

Value To Find

1

Replace With

Male

Advanced options

Replace Values

Replace one value with another in the selected columns.

Value To Find


2

Replace With

Female

Advanced options

FINAL:

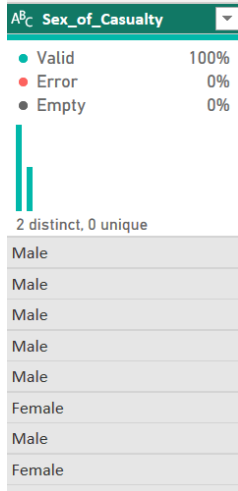


I Believe this coding is better for Dashboard visualizations

STEP 3 : Handle Missing Age Values

Age of Casualty is -1, which doesn't make sense

I replaced -1 with null

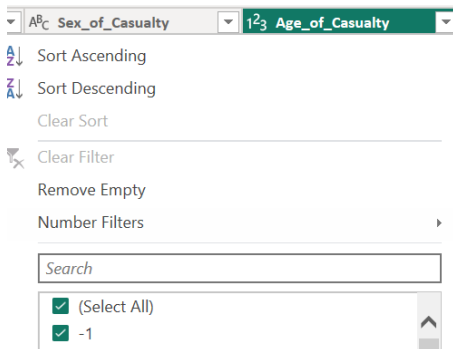

PROCESS:

Replace Values


Replace one value with another in the selected columns.

Value To Find


-1

Replace With

null

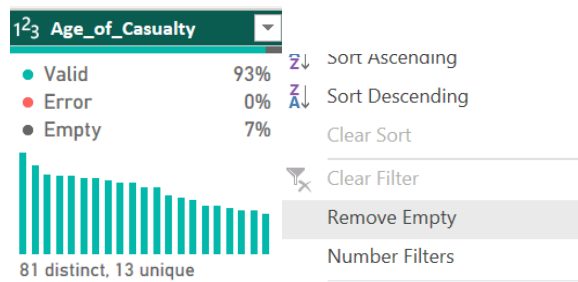

FINAL:



STEP 4 : Convert Severity Codes to Labels


I Chose to replace values

1 = Fatal

2 = Serious

3 = Slight

BEFORE: numeric codes

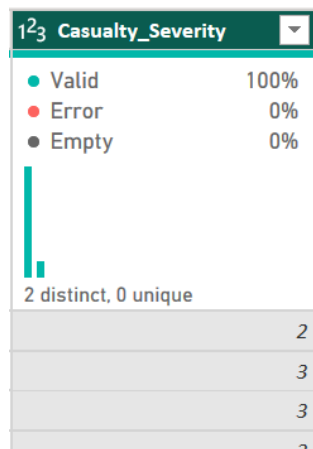

PROCESS:

Replace Values

Replace one value with another in the selected columns.

Value To Find

1

Replace With

Fatal

▸ Advanced options

Replace Values

Replace one value with another in the selected columns.

Value To Find

2

Replace With

Serious

▸ Advanced options

Replace Values

Replace one value with another in the selected columns.

Value To Find


3

Replace With

Slight

▸ Advanced options

AFTER:

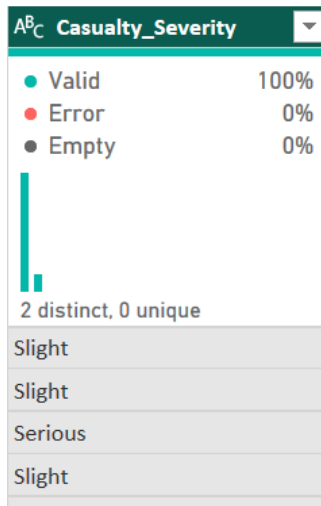

Improves dashboard readability.

Decoding severity codes improves dashboard readability and makes filters intuitive for business users.

STEP 5 : Create Casualty Age Group

I used the same logic as driver grouping.

Custom Column formula:


if [Age_of_Casualty] < 18 then "Child"

else if [Age_of_Casualty] < 30 then "Young Adult"

else if [Age_of_Casualty] < 60 then "Adult"

else "Senior"

BEFORE:

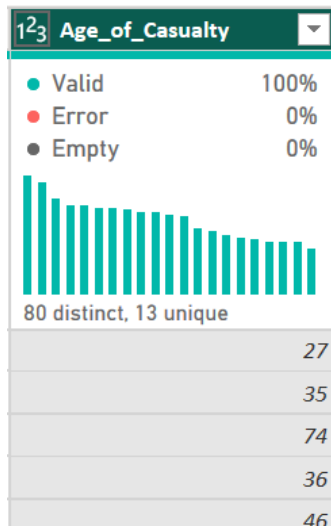

PROCESS:

Created a new column for age grouping

Custom Column

Add a column that is computed from the other columns.

New column name

Age_Group_Casualties

Custom column formula ⓘ

```
= if [Age_of_Casualty] < 18 then "Child"  
  else if [Age_of_Casualty] < 30 then "Young Adult"  
  else if [Age_of_Casualty] < 60 then "Adult"  
  else "Senior"
```

[Learn about Power Query formulas](#)

Available columns

Accident_Index
Casualty_Reference
Vehicle_Reference
Casualty_Class
Sex_of_Casualty
Age_of_Casualty
Age_Band_of_Casualty
Casualty_Severity

<< Insert

✓ No syntax errors have been detected.

OK

Cancel

AFTER:

ABC123 Age_Group_Casualties

Valid

100%

Error

0%

Empty

0%

Adult
Adult
Senior
Adult
Adult
Adult
Adult
Child

STEP 6 : Remove Unnecessary Columns

Removed Casualty Home Area Codes, as it wasn't relevant to my dashboard

123 Casualty_Home_Area_Type

Valid

100%

Error

0%

Empty

0%



4 distinct, 0 unique


STEP 11 : Applied Steps Pane Screenshot

This table contains more than 10 applied steps.

APPLIED STEPS	
Source	⚙
Promoted Headers	⚙
Changed Type	
Reordered Columns	
Removed Duplicates	
Changed Type1	
Replaced Value	⚙
Replaced Value1	⚙
Replaced Value2	⚙
✕ Filtered Rows	⚙
Changed Type2	
Replaced Value3	⚙
Replaced Value4	⚙
Replaced Value5	⚙
✕ Added Custom	⚙

Query Dependency View:

Query Dependencies

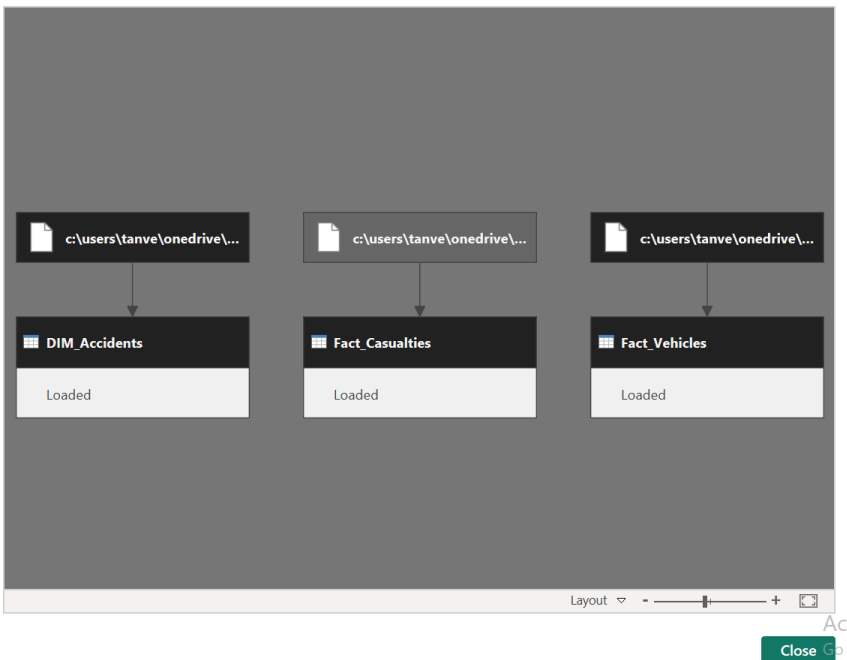

This diagram shows the logical ETL flow. The three tables are loaded independently and will be related through the Accident_Index key in the model view.

PART B : DATA MODELING (15 Marks)

Star Schema Design

FACT TABLES:

- Fact_Vehicles: Contains vehicle-level details for each accident
- Fact_Casualties: Contains casualty-level details for each accident

DIMENSION TABLE:

- Dim_Accidents: Contains core accident information

Structure explanation:

One accident can involve multiple vehicles and multiple casualties.

One accident can involve:

- Multiple vehicles
- Multiple casualties


Therefore:

Dim_Accidents (1) → Fact_Vehicles (Many)

Dim_Accidents (1) → Fact_Casualties (Many)

Original Schema

This is the Model View with minimal Relationships

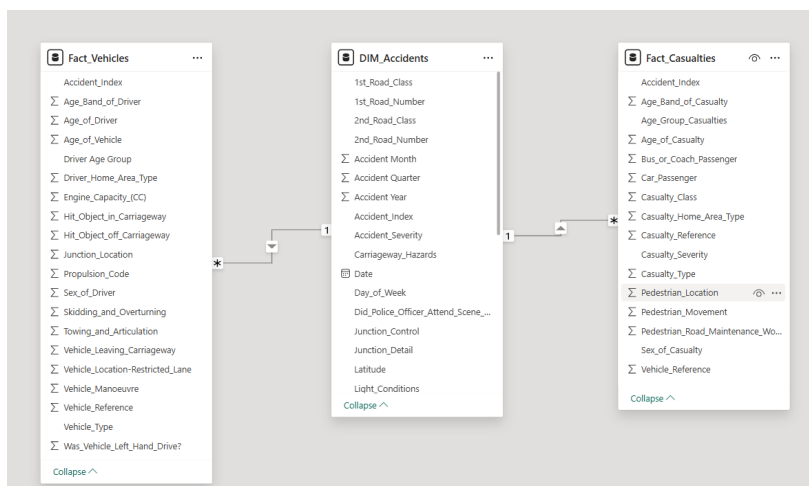

DIMENSION CREATION

Creating Dim Date:

Time intelligence is cleaner with proper date dimensionality


Duplicated Dim_accidents and created a new dim table with only date

The screenshot shows the Power BI Desktop interface. On the left, the 'Queries' pane lists 'DIM_Accidents', 'Fact_Casualties', 'Fact_Vehicles', and 'DIM_Date'. The 'Fact_Vehicles' table is selected, and a context menu is open with options like 'Copy', 'Paste', 'Delete', 'Rename', 'Enable load', 'Include in report refresh', 'Duplicate', and 'Reference'. The 'Duplicate' option is highlighted. In the center, a preview of the 'DIM_Accidents' table is shown. On the right, a 'Remove Columns' dialog box is open, showing options to 'Remove Columns', 'Keep Rows', 'Remove Rows', 'Remove Columns', and 'Remove Other Columns'. Below the dialog, a formula bar shows the DAX formula: `= Table.SelectColumns("#Removed Column", {"Date"})`. The 'Date' column is highlighted in the formula bar. Below the formula bar, a data preview for the 'Date' column is shown, indicating 322 distinct values and 67 unique values. The preview shows two rows: '2005-01-04' and '2005-01-05'.


Then i removed duplicates in date to have only unique dates

The screenshot shows the Power BI Desktop interface. On the left, a 'Remove Rows' dialog box is open, showing options like 'Remove Top Rows', 'Remove Bottom Rows', 'Remove Alternate Rows', 'Remove Duplicates', 'Remove Blank Rows', and 'Remove Rows with values in the current column'. The 'Remove Duplicates' option is highlighted. In the center, an 'APPLIED STEPS' pane is open, showing a list of steps: 'Changed Type', 'Inserted Year', 'Inserted Month', 'Inserted Quarter', 'Renamed Columns', 'Filtered Rows', 'Filtered Rows1', 'Filtered Rows2', 'Filtered Rows3', 'Replaced Value', 'Replaced Value1', 'Replaced Value2', 'Removed Columns', 'Removed Other Columns', and 'Removed Duplicates'. The 'Removed Duplicates' step is highlighted. On the right, a data preview for the 'Date' column is shown, indicating 1000 distinct values and 1000 unique values. The preview shows a bar chart with 1000 bars, all of which are green, indicating that all values are valid.


I then added a Year Column

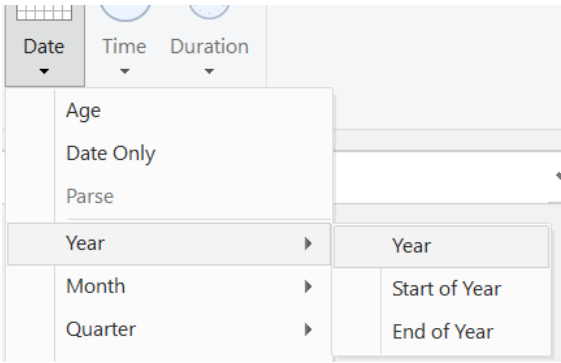

I added Month Number and Name as well

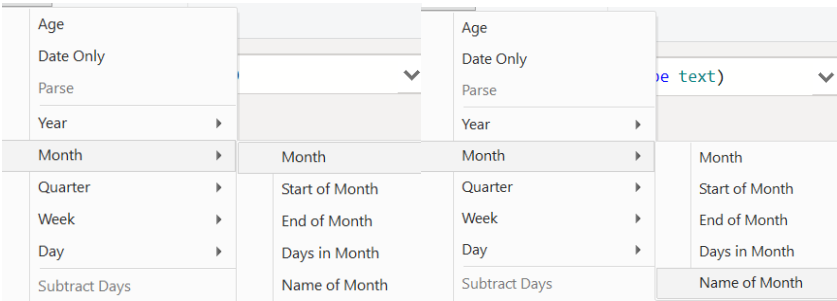

Next step I added Quarter

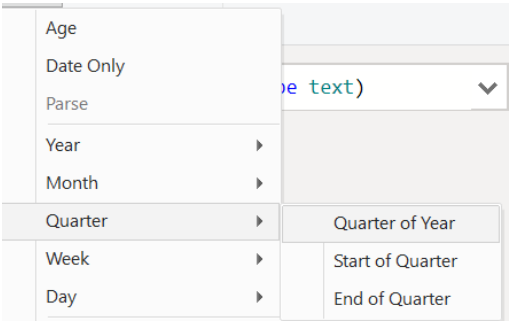


I then renamed all Columns

	123 Year	123 Month	ABC Month_Name	123 Quarter
Valid 100%	Valid 100%	Valid 100%	Valid 100%	Valid 100%
Error 0%	Error 0%	Error 0%	Error 0%	Error 0%
Empty 0%	Empty 0%	Empty 0%	Empty 0%	Empty 0%
distinct, 1000 unique	3 distinct, 0 unique	12 distinct, 0 unique	12 distinct, 0 unique	4 distinct, 0 unique
2005-01-04	2005	1	January	1
2005-01-05	2005	1	January	1


Creating DIM_Location:

Location Dimensionality is very necessary to my visualization


Started by duplicating Dim_Accidents and renaming it to Dim_Location

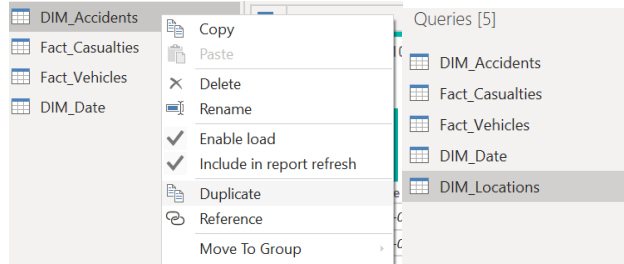


Next i filtered for only the location Fields

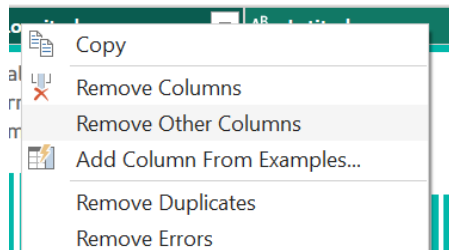

I selected latitude and longitude and removed duplicates

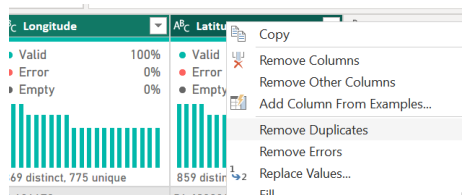

Created a Location_Id index Column, to have a clean primary Key

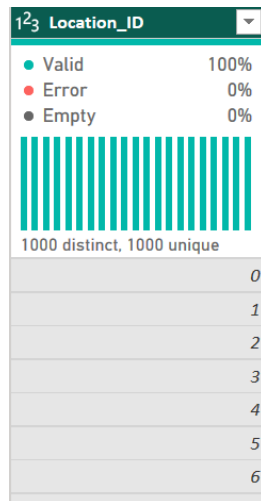

CREATING RELATIONSHIPS:

1) Connecting Dim_Date to Dim_Accidents over Date

New relationship

Select tables and columns that are related.

From table

DIM_Accidents

Date	Day_of_Week	Did_Police_Of...	Junction_Con...	Junction_Detail	Latitude	Light_Con
August-06-05	7	1	4	3	55.866410	1
July-09-05	7	1	4	3	55.855995	1
August-13-05	7	1	4	3	55.858616	1

To table

DIM_Date

Date	Month	Month_Name	Quarter	Year
July-01-05	7	July	3	2005
July-04-05	7	July	3	2005
July-03-05	7	July	3	2005

Cardinality

Many to one (*:1)

Cross-filter direction

Single

☒ Make this relationship active

☐ Apply security filter in both directions

☐ Assume referential integrity

Save

Cancel

2) Connecting Dim_location to Dim_Accidents over Location_ID

Edit relationship

Select tables and columns that are related.

From table

DIM_Accidents

ss	1st_Road_Nu...	2nd_Road_Cla...	2nd_Road_Nu...	Accident Mon...	Accident Qua...	Accident Year	Accide
0	6	0	8	3	2005	2005	
0	6	0	7	3	2005	2005	
0	6	0	8	3	2005	2005	

To table

DIM_Locations

Latitude	Location_ID	Longitude	LSOA_of_Acci...	Police_Force	Urban_or_Rur...
55.855471	180350	-4.250145		97	1
55.860273	180351	-4.243071		97	1
55.864688	180352	-4.257231		97	1

Cardinality

Many to one (*:1)

Cross-filter direction

Single

☒ Make this relationship active


☐ Apply security filter in both directions

☐ Assume referential integrity

Save

Cancel

MODEL VIEW WITH STAR SCHEMA

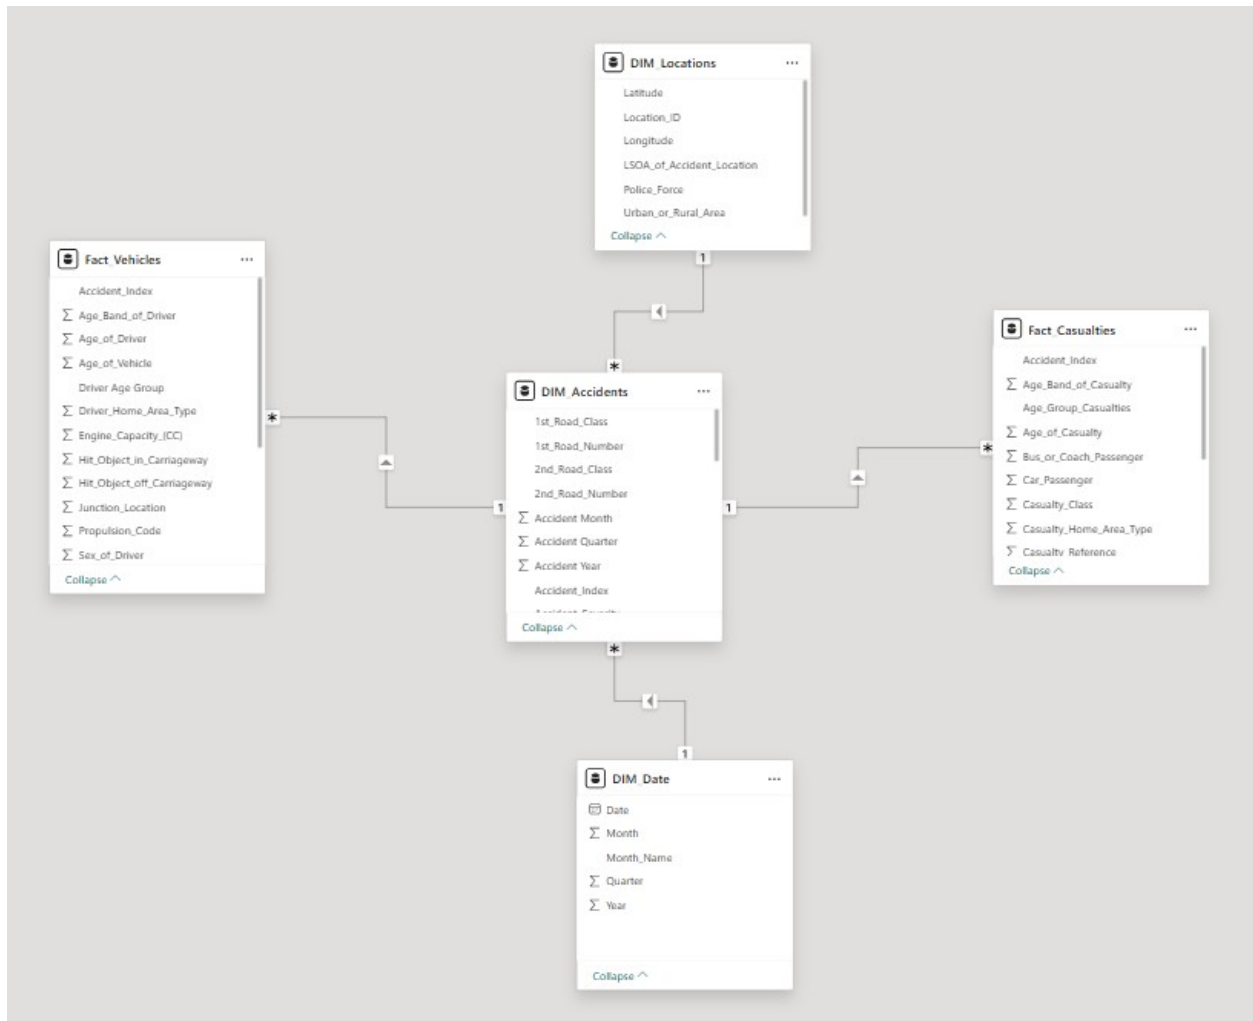

Avoiding Many-to-Many

No direct relationship between FACT_Vehicles and FACT_Casualties.
Both connect through Dim_Accidents.

This prevents ambiguous filtering.

PART C : DASHBOARD DEVELOPMENT (10 Marks)


KPI Section

KPI's are real time aggregating tools, that track and display most critical data metrics. For this section i will Use DAX mostly as i am more comfortable with coding.

KPI's:


Total Accidents:

New measure : Total Accidents

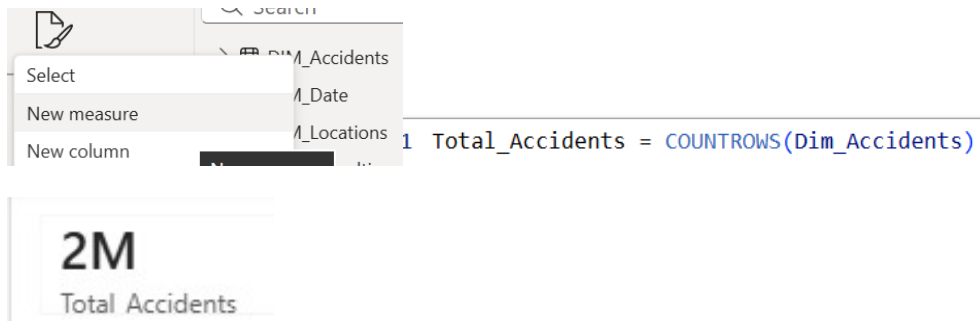

This card shows the total accidents from the dataset

Total Vehicles Involved:

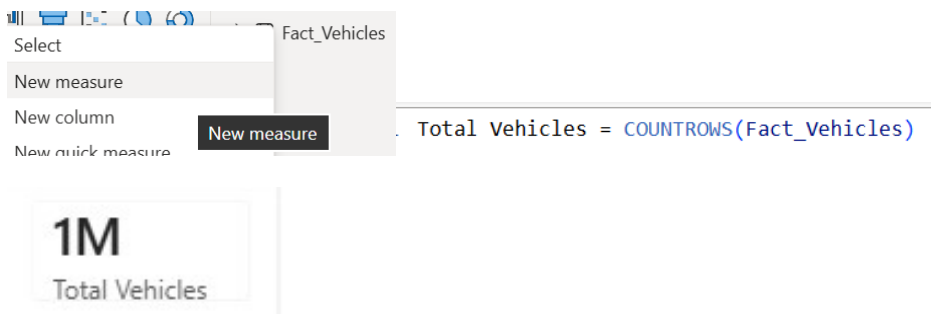

This card shows the total number of vehicles involved

Total Casualties:




This card shows the total number of casualties

Fatality Rate:

I first needed to create fatal incidents, fatality rate and then set it to percentages.


Fatal accidents:

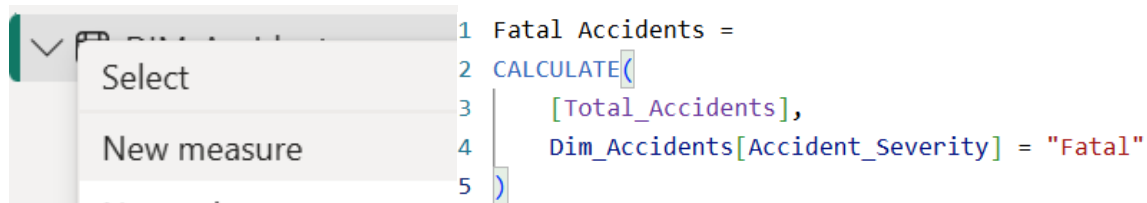

Fatality Rate:



I then set it to percentages



/ the values in this column in percentages.

Fatality Rate Card:



This card shows the total Fatality rate



KPI's created:

- Total Accidents: Overall accident volume
- Total Vehicles: Vehicle involvement metric
- Total Casualties: Human impact measure
- Fatality Rate: Severity indicator (formatted as %)

TREND ANALYSIS:

Line chart:

Accidents by Year

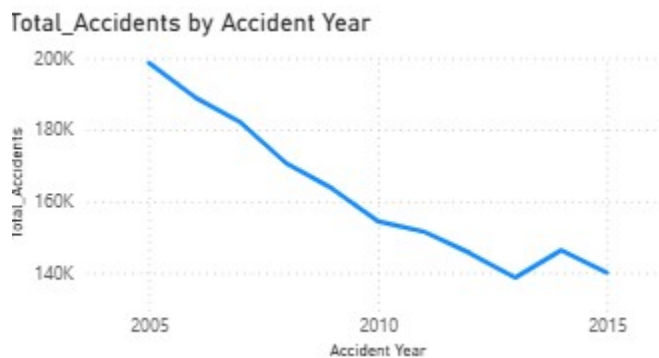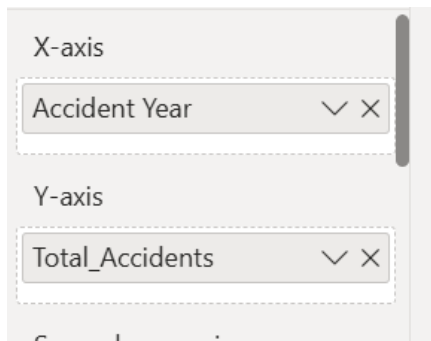


Insight:

The trend shows accident numbers decreasing over the decade, suggesting improved road safety measures.

Comparative Analysis


Bar chart: Accidents by Severity

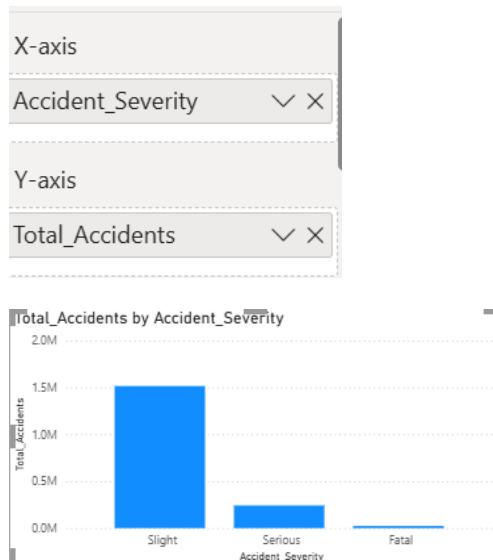

Slight accidents dominate, with serious and fatal at dropping off majorly.

Distribution Visualization

Donut Chart: Severity Distribution

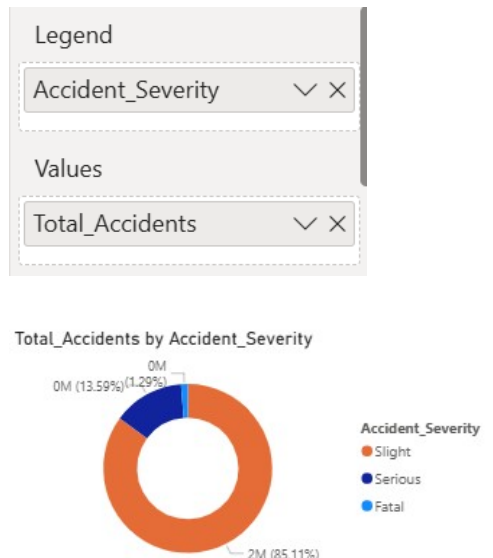

Geographic Visualization

Map: Accidents by Latitude/Longitude

Latitude

▼

×

Longitude

Longitude

▼

×

Legend

Add data fields here


Size

Total Accidents


▼

▼

Accidents By Coordinates

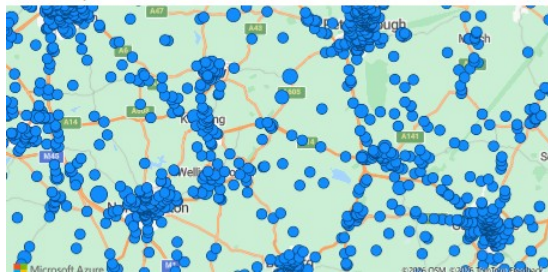


Accidents By Coordinates

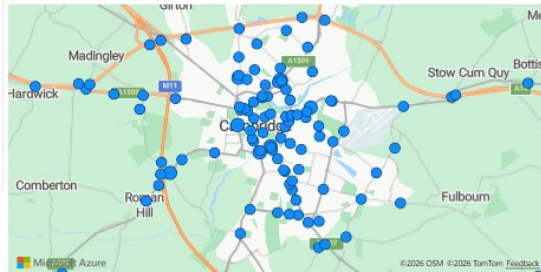

Adding severity

Accidents By Coordinates

Accident_Severity ● Slight ● Serious ● Fatal

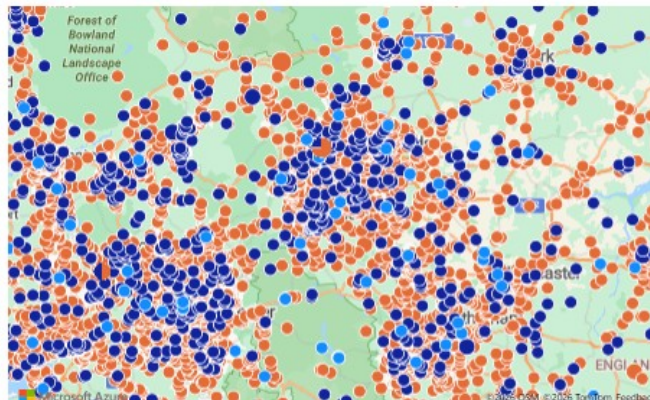


The map reveals accident clustering in urban areas and along major motorways

Interactive Slicers

Slicers enable dynamic filtering by year, severity, or month, supporting executive exploration of specific time periods or accident types.

SLICER: Year

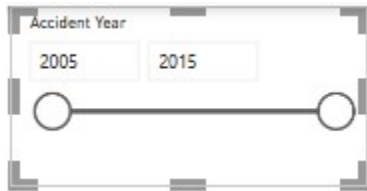

SLICER: Severity

Accident_Sev...  


☐ (Blank)

☐ Fatal

☐ Serious

☐ Slight


Vehicles Per Accident Histogram

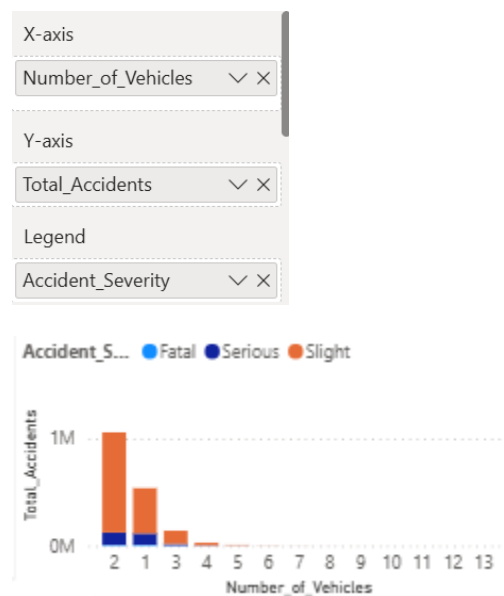


Most accidents involve 2 vehicles (rear-end collisions at junctions). Single-vehicle accidents are next highest (often hitting stationary objects). Accidents with 3+ vehicles are rare but more severe.

Cross Filter Interaction:

No Filters applied:

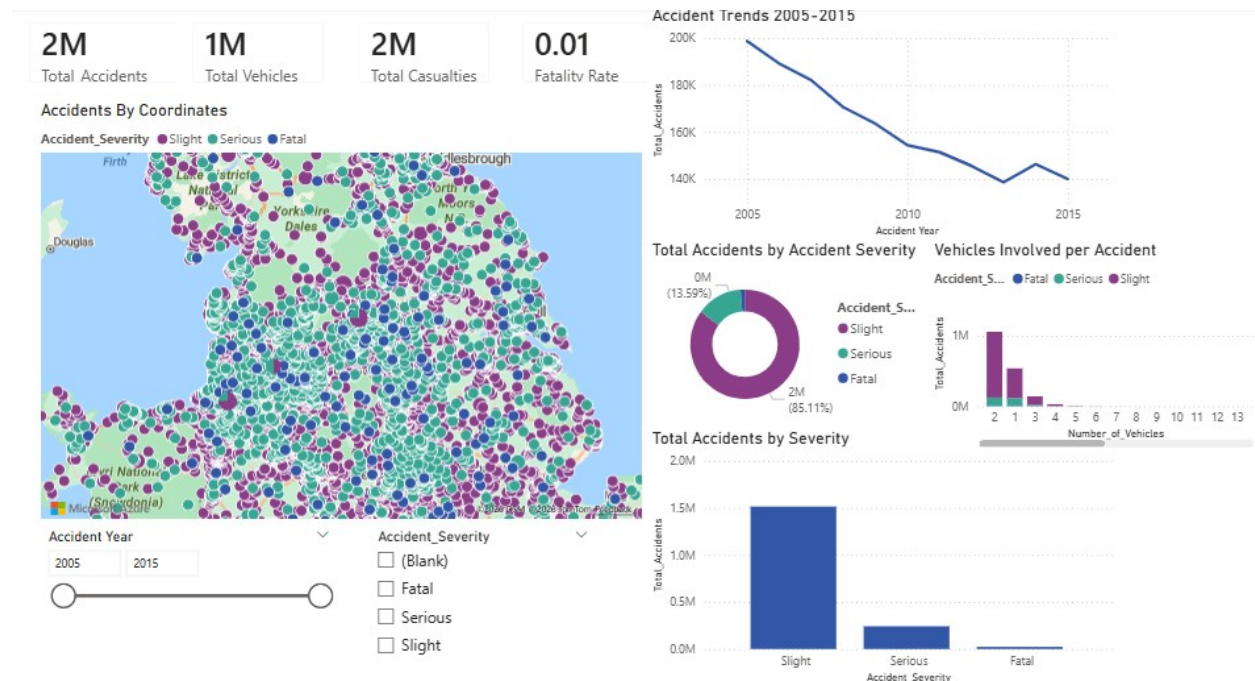


Filter for slight injury in 2009:

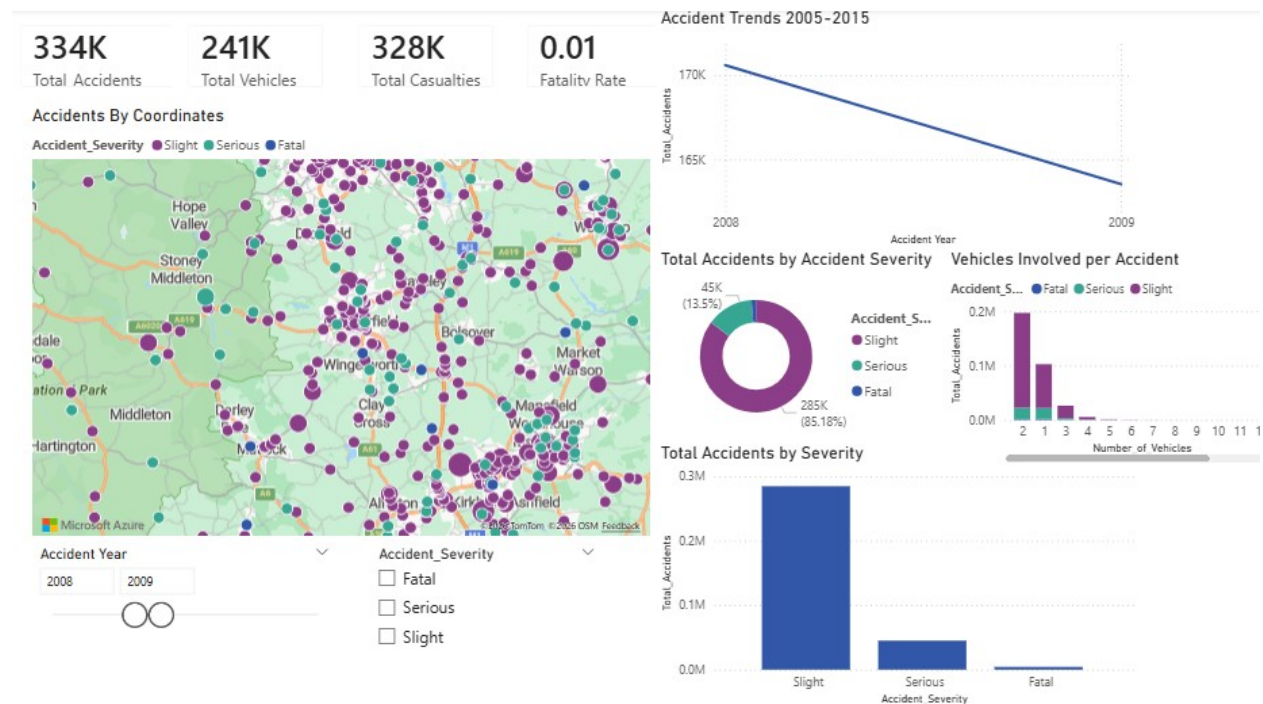


PART D : PUBLISHING & DEPLOYMENT (5 Marks)

Publishing Process


Clicked on Publish:

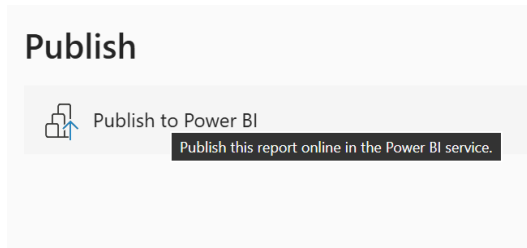

Workplace Selected:

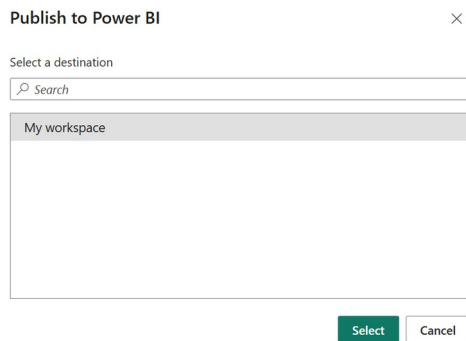

Publishing window:

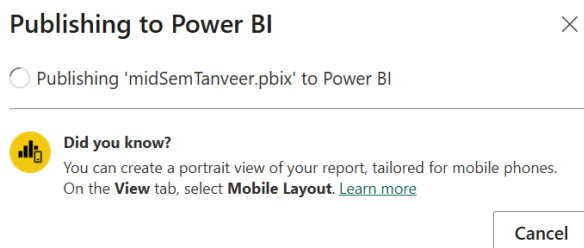

Successful Publishing Message:

Publishing to Power BI



✓ Success!

[Open 'midSemTanveer.pbix' in Power BI](#)

[Get Quick Insights](#)




Did you know?

You can create a portrait view of your report, tailored for mobile phones. On the **View** tab, select **Mobile Layout**. [Learn more](#)

Got it

Generating Link:

On the PowerBI Website, in my Dashboard:

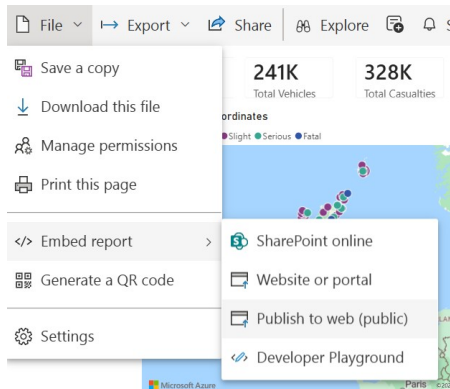

Error Due To Admin Permissions:


Contact your admin to enable embed code creation



To publish this report on the web, ask your Power BI admin if they will allow you to create new publish to web embed codes. Once they turn that on, you will be able to publish this report to the web. [Learn more](#)

OK

Manually Sending Link to Professor Odera:

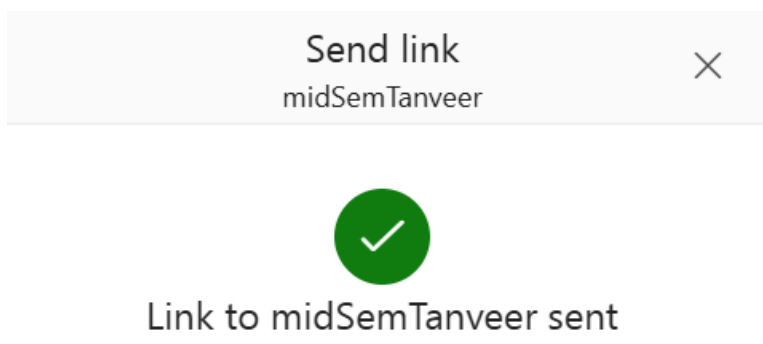

Public Dashboard Link:

Power BI Public Dashboard Link:

[Tanveer PowerBI Link](#)

or:

https://app.powerbi.com/links/VygqYQWzGS?ctid=16d83ee6-254a-469d-a6cc-54e2ca2313e7&pbi_source=linkShare

FINAL DASHBOARD ON WEBSITE:

