
Innhold

Checkout web form 2
Setup 2
Connection to Checkout keyword 3
Example form with custom parameters 4
Example form with ServiceId 5
Example form with lookup button 5
Checkout REST API 6
Submit 6
Get order 8
Get agreement 8
Get agreement orders 9
Pause agreement 10
Stop agreement 10
Delete agreement 10
Change agreement user data 10
Change agreement price 10
User change agreement payment method 10
Order status codes 11
Agreement status codes 11
Webhooks 11
Order 11
Agreement 11
Agreement webhook types 11

Checkout web form

This is a web payment solution for your product page. It looks like this:

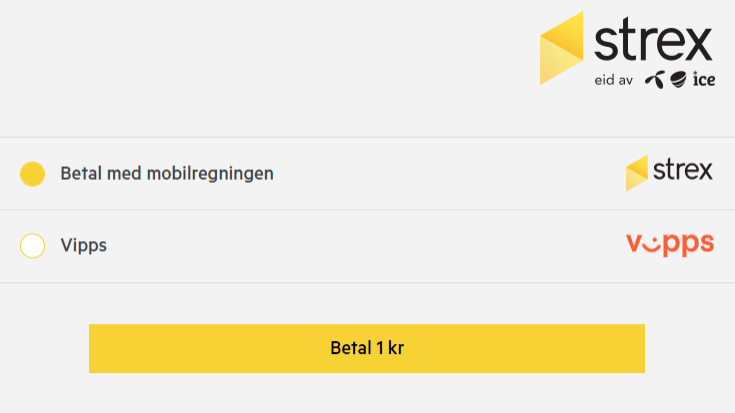

Setup

To send your users to this payment page, set up a web page with a form posting to this URL:

- https://betaling.strex.no/checkout/#AccountId/submit

#AccountId must be replaced by your AccountId provided by Strex (a number).

The form can post these parameters:

Parameter	Description	Optional
correlationId*	Unique identifier for your checkout page, connecting the orders created together. Typically, a GUID.	No
product*	The name of the product to put on the order. Max 100 characters.	No
description*	Text description of the product. Max 500 characters.	Yes
recurring*	Set to an interval value if this is a recurring payment. The user will then be charged by Strex each interval. Possible intervals: • DAY • WEEK • MONTH • YEAR	Yes
recurringFirst*	Same as above, but only used for the first interval.	Yes
recurringInterval*	How long the interval is. 1 = each month, 2 = every other month and so on.	Yes
recurringIntervalFirst*	Same as above, but only for the first interval.	Yes
recurringText*	Optional text that will be sent to the end user as a SMS message each time recurring billing is performed. You can	Yes


	include a stop URL by adding #STREX_UNSUBSCRIBE_URL to the text.	
amount	Amount in Norwegian kroner to charge the end user.	No
initialAmount	Amount charged the first time instead of the above.	Yes
phone	Phone number of the end user. Can be with or without country code (+47).	No
paymentMethods	Defaults to “Strex,Vipps”. Can be set to just one of them if you only want to present one of the payment methods.	Yes
shortNumberId*	ShortNumberId to do Strex payment on (for example NO-2001).	No
strexMerchantId*	MerchantId for Strex payment. If not provided MerchantId connected to ShortNumberId will be used.	Yes
strexBusinessModel*	Business model for Strex payment. If not provided, default value on account will be used.	Yes
strexServiceCode*	ServiceCode for Strex payment. If not provided, default value on account will be used.	Yes
strexInvoiceText	Text that will be shown on Strex Min Side	Yes
returnUrl*	URL the user will be redirected to after payment.	Yes

*=should be hidden fields in the form, not to be entered by the user. All fields can be hidden if prefilled with a value.

Additional parameters added to the form will be stored on the order and become visible in Strex Connect.

Connection to Checkout keyword

If you have an existing Checkout keyword in Strex Connect you can provide the ServiceId for this keyword instead of providing all the setup parameters in the form. It can be found in Strex Connect when you edit the keyword.

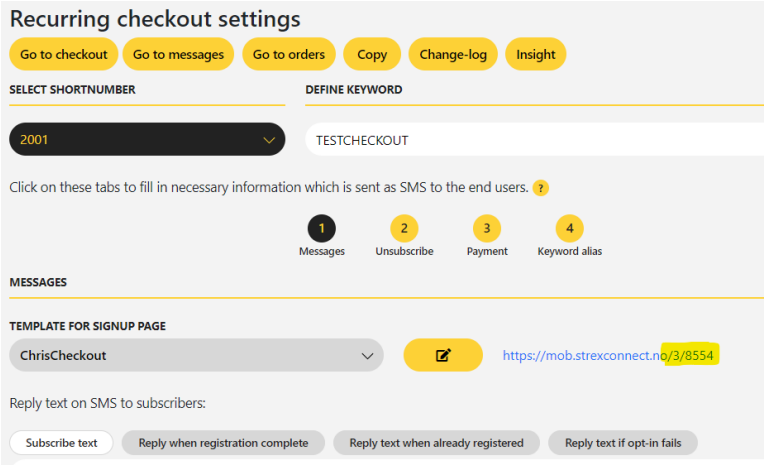


In the template URL the first number is your AccountId and the last number is the ServiceId.

The relevant parameters in this case are:

Parameter	Description	Optional
serviceId*	From the template URL in Strex Connect as described above.	No
Phone	Phone number of the end user. Can be with or without country code (+47).	No
returnUrl*	URL the user will be redirected to after payment.	Yes
Email	Parameter mapped to corresponding field in Strex Connect.	Yes
FirstName	Parameter mapped to corresponding field in Strex Connect.	Yes
LastName	Parameter mapped to corresponding field in Strex Connect.	Yes
Address	Parameter mapped to corresponding field in Strex Connect.	Yes
ZipCode	Parameter mapped to corresponding field in Strex Connect.	Yes
City	Parameter mapped to corresponding field in Strex Connect.	Yes

Example form with custom parameters

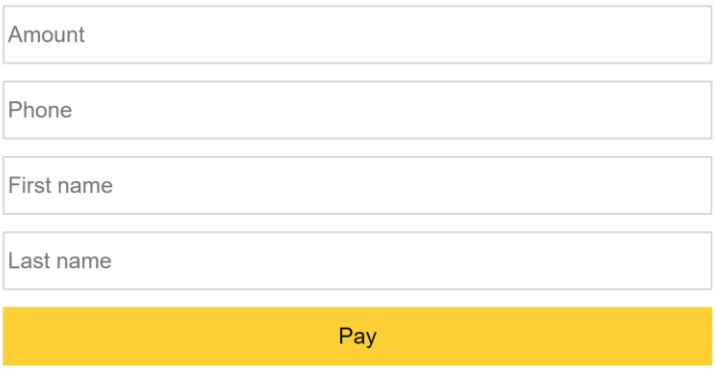

Please note that values in brackets {} must be replaced with values as described above. Replace values in “placeholder” attributes with your own texts for the input fields.

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<style>
  input, button {width: 100%; margin-bottom: 10px; height: 35px; border: 1px solid lightgray; }
  button { background: #ffd100; border-width: 0; }
</style>
<form action="https://betaling.strex.no/checkout/{Your AccountId}/submit" method="POST">
  <input name="correlationId" value="{Your CorrelationId}" type="hidden" />
  <input name="shortNumberId" value="{ShortNumberId}" type="hidden" />
  <input name="strexMerchantId" value="{MerchantId}" type="hidden" />
  <input name="strexBusinessModel" value="{BusinessModel}" type="hidden" />
  <input name="strexServiceCode" value="{ServiceCode}" type="hidden" />
  <input name="strexInvoiceText" value="{InvoiceText}" type="hidden" />
  <input name="returnUrl" value="{Your return url}" type="hidden" />
  <input name="product" value="{Your product name}" type="hidden" />
```


```
  <input name="description" value="{Your product description}" type="hidden" />
  <input name="recurring" value="{Recurring interval}" type="hidden" />
  <input name="recurringText" value="{Your recurring text}" type="hidden" />
  <div><input name="amount" type="number" placeholder="Amount" required /></div>
  <div><input name="phone" type="tel" placeholder="Phone" required /></div>
  <div><input name="FirstName" placeholder="First name" type="text" /></div>
  <div><input name="LastName" placeholder="Last name" type="text" /></div>
  <div><button type="submit">Pay</button></div>
</form>
```

Example form with ServiceId

Please note that values in brackets {} must be replaced with values as described above. Replace values in “placeholder” attributes with your values.

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<style>
  input, button {width: 100%; margin-bottom: 10px; height: 35px; border: 1px solid lightgray; }
  button { background: #ffd100; border-width: 0; }
</style>
<form action="https://betaling.strex.no/checkout/{Your AccountId}/submit" method="POST">
  <input name="serviceId" value="{Your ServiceId}" type="hidden" />
  <input name="returnUrl" value="{Your return url}" type="hidden" />
  <div><input name="phone" type="tel" placeholder="Phone" required /></div>
  <div><input name="FirstName" placeholder="First name" type="text" /></div>
  <div><input name="LastName" placeholder="Last name" type="text" /></div>
  <div><button type="submit">Pay</button></div>
</form>
```

Example form with lookup button

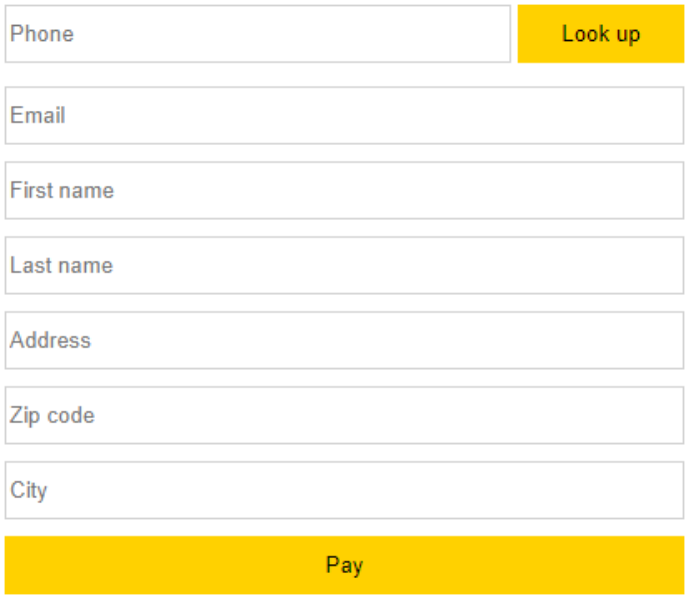

To be able to use this, you need to ask us for a LookupId and replace it in the lookup URL in the lookup function below. In this example the amount is not set by the user but is hidden. It will be shown to the user in the next step.

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<style>
input, button { width: 100%; margin-bottom: 10px; height: 35px; border: 1px solid lightgray; }
button { background: #ffd100; border-width: 0; }
table { width: 100%; }
```

```
.phoneinput { width: 100%; }
.phonebutton { width: 100px; }
</style>
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.7.1/jquery.min.js"></script>
<script>
function lookup() {
  let msisdn = $("#phone").val();
  $.get("https://betaling.strex.no/lookup/{Your LookupId}/" + msisdn).done(function(data){
    if (data.lastName != null) {
      $("#firstName").val(data.firstName);
      $("#lastName").val(data.lastName);
      $("#address").val(data.streetName + " " + data.streetNumber + (data.streetLetter ? " " +
data.streetLetter : ""));
      $("#zipcode").val(data.zipCode);
      $("#city").val(data.city);
    }
  });
}
</script>
<form action="https://betaling.strex.no/checkout/{Your AccountId}/submit" method="POST">
  <input name="serviceId" value="{ServiceId}" type="hidden" />
  <input name="returnUrl" value="{Your return url}" type="hidden" />
<table>
<tr>
  <td><input name="phone" id="phone" class="phoneinput" type="tel" placeholder="Phone" required /></td>
  <td class="phonebutton"><button onclick="lookup()" type="button">Look up </button></td>
</tr>
<td colspan=2>
  <div><input name="Email" id="email" placeholder="Email" type="email" /></div>
  <div><input name="FirstName" id="firstName" placeholder="First name" type="text" /></div>
  <div><input name="LastName" id="lastName" placeholder="Last name" type="text" /></div>
  <div><input name="Address" id="address" placeholder="Address" type="text" /></div>
  <div><input name="ZipCode" id="zipcode" placeholder="Zip code" type="text" /></div>
  <div><input name="City" id="city" placeholder="City" type="text" /></div>
  <div><button type="submit">Pay</button></div>
</td>
</tr>
</table>
</form>
```

Checkout REST API

Authentication is done by including your API key (see Strex Connect) in the header X-ApiKey.

Submit


```
POST https://betaling.strex.no/api/{accountId}/submit
{
  "serviceId": "12345",
  "phone": "+47xxxxxxxx",
  "email": "xxx@somedomain.no",
  "firstName": "Ola",
  "lastName": "Nordmann",
  "address": "Testveien 1",
  "zipCode": "1234",
  "city": "Oslo",
  "returnUrl": "https://mysite.mydomain.no"
  "webhookUrl": "https://webhooks.mydomain.no"
}

Response:
{
  "transactionId": "90cd3a55-7b72-473d-af9e-1ff5b08bc893",
  "agreementId": "45000bde-367d-490a-a877-c9d1cd6b7eab",
  "strexValidity": true,
  "url": "https://betaling.strex.no/{accountId}/XxXyYyZzZ"
}
```

Request:

Parameter	Description	Optional
serviceId*	From the template URL in Strex Connect as described in “Connection to Checkout keyword” in the first chapter.	No
Phone	Phone number of the end user. Can be with or without country code (+47).	No
returnUrl	URL the user will be redirected to after payment.	Yes
webhookUrl	URL where webhooks will be forwarded.	Yes
Email	Parameter mapped to corresponding field in Strex Connect.	Yes
FirstName	Parameter mapped to corresponding field in Strex Connect.	Yes
LastName	Parameter mapped to corresponding field in Strex Connect.	Yes
Address	Parameter mapped to corresponding field in Strex Connect.	Yes
ZipCode	Parameter mapped to corresponding field in Strex Connect.	Yes
City	Parameter mapped to corresponding field in Strex Connect.	Yes

Response:

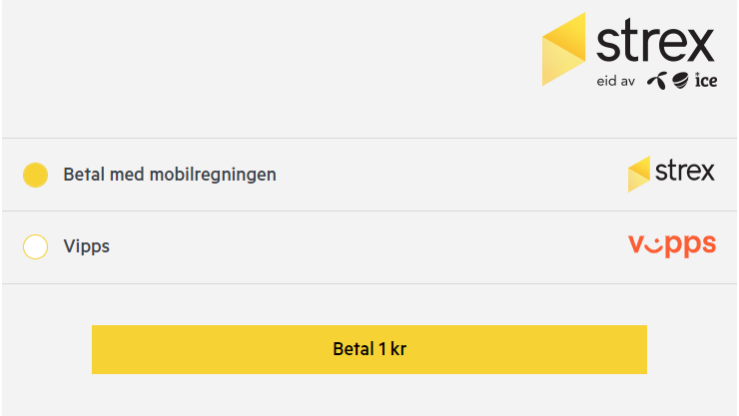Variable	Description
TransactionId	For the checkout order, can be used to check status later.
AgreementId	For the checkout agreement if this is a recurring checkout. Can be used to check status later.
Url	Forward the end user to this, or send it to him, which will lead him here: 

Get order

GET https://betaling.strex.no/api/{accountId}/order/{transactionId}

Response:


```
{
  "transactionId": "90cd3a55-7b72-473d-af9e-1ff5b08bc893",
  "agreementId": "45000bde-367d-490a-a877-c9d1cd6b7eab",
  "paymentTransactionId": "7b705176-adb2-4f57-9e67-bb6ff2cbfd9c",
  "paymentStatus": "Ok",
  "paymentDetailedStatus": "Success",
  "created": "2026-07-17T08:11:12.9737861+00:00",
  "lastModified": "2026-07-17T08:14:21.9698071+00:00",
  "title": "Newsletter",
  "description": "Monthly payment for newsletter.",
  "amount": 9900,
  "quantity": 1,
  "serviceId": "12345",
  "webhookUrl": "https://webhooks.mydomain.no",
  "smsRecipient": "+47xxxxxxxx",
  "paymentMethods": [
      "Strex",
      "Vipps",
      "Stripe"
  ],
  "paymentMethod": "Strex",
  "shortNumberId": "NO-2001",
  "keyword": "NO-2001 NEWSLETTER",
  "strexMerchantId": "mer_myaccount_as",
  "strexBusinessModel": "INFORMATIONSERVICES",
  "strexServiceCode": "02001",
  "strexInvoiceText": "Payment for newsletter.",
  "strexMaxTries": 3,
  "vippsScope": "name",
  "email": "xxx@somedomain.no",
  "firstName": "Ola",
  "lastName": "Nordmann",
  "address": "Testveien 1",
  "zipCode": "1234",
  "city": "Oslo",
  "accountId": 3,
  "properties": {
      "PriceId": "price_1TlnWpKOPv6E0CUpNWE2Ol67",
      "WebhookUrl": "https://webhooks.mydomain.no"
  }
}
```


Check "paymentStatus" to see if user has paid successfully or not and "paymentMethod" to see which payment method he used.

Get agreement

GET https://betaling.strex.no/api/{accountId}/agreement/{agreementId}

Response:


```
{
  "agreementId": "45000bde-367d-490a-a877-c9d1cd6b7eab",
  "nextRecurringTime": "2026-07-18T08:14:21.984373+00:00",
  "initialAmount": 9900,
  "recurringInterval": "MONTH",
  "recurringIntervalCount": 1,
  "recurringIntervalFirst": "MONTH",
  "recurringIntervalCountFirst": 1,
  "recurringIntervalNumbers": 0,
  "status": "Active",
  "chargeCount": 0,
  "created": "2026-07-17T08:11:12.9462578+00:00",
  "lastModified": "2026-07-17T08:14:22.0225753+00:00",
  "title": "Newsletter",
  "description": "Monthly payment for newsletter.",
```

```
  "amount": 9900,
  "quantity": 1,
  "serviceId": "12345",
  "correlationId": "12345",
  "webhookUrl": "https://webhooks.mydomain.no",
  "smsRecipient": "+47xxxxxxxx",
  "paymentMethods": [
      "Strex",
      "Vipps",
      "Stripe"
  ],
  "paymentMethod": "Strex",
  "sourceOfFunds": 1,
  "shortNumberId": "NO-2001",
  "keyword": "NO-2001 NEWSLETTER",
  "strexMerchantId": "mer_myaccount_as",
  "strexBusinessModel": "INFORMATIONSERVICES",
  "strexServiceCode": "02001",
  "strexInvoiceText": "Payment for newsletter.",
  "strexMaxTries": 3,
  "vippsScope": "name",
  "email": "xxx@somedomain.no",
  "firstName": "Ola",
  "lastName": "Nordmann",
  "address": "Testveien 1",
  "zipCode": "1234",
  "city": "Oslo",
  "accountId": 3,
  "properties": {
      "PriceId": "price_1TlnWpKOPv6E0CUpNWE2Ol67",
      "WebhookUrl": "https://webhooks.mydomain.no"
  }
}
```


Check "status" to see if the user has sucessfully completed the agreement or not.

Get agreement orders

GET https://betaling.strex.no/api/{accountId}/agreement/{agreementId}/orders

Response:


```
[
  {
    "transactionId": "90cd3a55-7b72-473d-af9e-1ff5b08bc893",
    "agreementId": "45000bde-367d-490a-a877-c9d1cd6b7eab",
    "paymentTransactionId": "7b705176-adb2-4f57-9e67-bb6ff2cbfd9c",
    "paymentStatus": "Ok",
    "paymentDetailedStatus": "Success",
    "created": "2026-07-17T08:11:12.9737861+00:00",
    "lastModified": "2026-07-17T08:14:21.9698071+00:00",
    "title": "Newsletter",
    "description": "Monthly payment for newsletter.",
    "amount": 9900,
    "quantity": 1,
    "serviceId": "12345",
    "webhookUrl": "https://webhooks.mydomain.no",
    "smsRecipient": "+47xxxxxxxx",
    "paymentMethods": [
        "Strex",
        "Vipps",
        "Stripe"
    ],
    "paymentMethod": "Strex",
    "shortNumberId": "NO-2001",
    "keyword": "NO-2001 NEWSLETTER",
    "strexMerchantId": "mer_myaccount_as",
    "strexBusinessModel": "INFORMATIONSERVICES",
    "strexServiceCode": "02001",
    "strexInvoiceText": "Payment for newsletter.",
    "strexMaxTries": 3,
    "vippsScope": "name",
    "email": "xxx@somedomain.no",
```

```
    "firstName": "Ola",
    "lastName": "Nordmann",
    "address": "Testveien 1",
    "zipCode": "1234",
    "city": "Oslo",
    "accountId": 3,
    "properties": {
        "PriceId": "price_1TlnWpKOPv6E0CUpNWE2Ol67",
        "WebhookUrl": "https://webhooks.mydomain.no"
    }
  }
]
```

Pause agreement

POST https://betaling.strex.no/api/{accountId}/{agreementId}/pause

```
{
    "paused": true / false
}
```

Response: HTTP 200 OK

Stop agreement

GET https://betaling.strex.no/api/{accountId}/{agreementId}/stop

Response: http 200 OK

Delete agreement

DELETE https://betaling.strex.no/api/{accountId}/{agreementId}

Response: HTTP 200 OK

Change agreement user data

PATCH https://betaling.strex.no/api/{accountId}/{agreementId}/userdata

```
{
  "address": "Nyveien 2",
  "zipCode": "2345",
  "city": "Nyby"
}
```

Response: http 200 OK

Change agreement price

PATCH https://betaling.strex.no/api/{accountId}/{agreementId}/price

```
{
  "price": "10900"
}
```

Response: http 200 OK

Price is in øre.

User change agreement payment method

To enable user to change payment method, forward him to, or send this url to him:

https://betaling.strex.no/recurring/{accountId}/change?agreementId={agreementId}

Order status codes

Sent	Order has been created, waiting for user to complete payment.
Ok	User has successfully completed the payment.
Failed	Payment has failed, see DetailedStatus for more details.
Reversed	Order has been reversed and funds have been returned to the user.

Agreement status codes

Pending	Agreement has been created, waiting for user to complete.
Active	Agreement has successfully been completed by the user.
Paused	Agreement has been paused, no payments will be charged.
Stopped	Agreement has been permanently stopped and is not possible to restart.
Expired	Agreement has expired, probably because the user did not finish in time.
Failed	Agreement has either failed when the user tried to complete it, or recurring charges has failed too many times.

Webhooks

Order


```
{
  "transactionId": "90cd3a55-7b72-473d-af9e-1ff5b08bc893",
  "smsStatus": "Ok",
  "paymentStatus": "Ok",
  "paymentDetailedStatus": "Success",
  "paymentTransactionId": "329872323324",
  "correlationId": "12345",
  "paymentMethod": "Strex"
}
```


Agreement


```
{
  "agreementId": "45000bde-367d-490a-a877-c9d1cd6b7eab",
  "type": "Charged",
  "Status": "Active",
  "detailedStatus": "Success",
  "correlationId": "12345",
  "paymentMethod": "Strex",
  "transactionId": "90cd3a55-7b72-473d-af9e-1ff5b08bc893",
  "price": 9900
}
```


Agreement webhook types

Created	Agreement was created, waiting for user.
Stopped	Agreement was stopped.
Paused	Agreement was paused.
Resumed	Agreement was resumed from pause.
Charged	Agreement was charged by recurring interval.

Reversed	Agreement funds was returned to user.
Deleted	Agreement was deleted.
Changed	Payment method was changed for agreement.