



IBM Developer
SKILLS NETWORK

Winning Space Race with Data Science

Arefeh Taherkhani
20230120



Outline

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

Executive Summary

Summary of methodologies

- Data Collection through API
- Data Collection with Web Scraping
- Data Wrangling
- Exploratory Data Analysis with SQL
- Exploratory Data Analysis with Data Visualization
- Interactive Visual Analytics with Folium
- Machine Learning Prediction

Summary of all results

- Exploratory Data Analysis result
- Interactive analytics in screenshots
- Predictive Analytics result

Introduction

Project background and context

Space X advertises Falcon 9 rocket launches on its website with a cost of 62 million dollars; other providers cost upward of 165 million dollars each, much of the savings is because Space X can reuse the first stage. Therefore, if we can determine if the first stage will land, we can determine the cost of a launch. This information can be used if an alternate company wants to bid against space X for a rocket launch. This goal of the project is to create a machine learning pipeline to predict if the first stage will land successfully.

Problems you want to find answers

- What factors determine if the rocket will land successfully?
- The interaction amongst various features that determine the success rate of a successful landing.
- What operating conditions needs to be in place to ensure a successful landing program.

Section 1

Methodology

Methodology

Executive Summary

- Data collection methodology:
 - Describe how data was collected
- Perform data wrangling
 - Describe how data was processed
- Perform exploratory data analysis (EDA) using visualization and SQL
- Perform interactive visual analytics using Folium and Plotly Dash
- Perform predictive analysis using classification models
 - How to build, tune, evaluate classification models

Data Collection

- The data was collected using various methods
 - Data collection was done using get request to the SpaceX API.
 - Next, we decoded the response content as a Json using `.json()` function call and turn it into a pandas dataframe using `.json_normalize()`.
 - We then cleaned the data, checked for missing values and fill in missing values where necessary.
 - In addition, we performed web scraping from Wikipedia for Falcon 9 launch records with BeautifulSoup.
 - The objective was to extract the launch records as HTML table, parse the table and convert it to a pandas dataframe for future analysis.

Data Collection – SpaceX API

- We used the get request to the SpaceX API to collect data, clean the requested data and did some basic data wrangling and formatting.
- The link to the notebook is <https://github.com/Tarkhon/IBM-Final-Project-of-Applied-Data-Science-Capstone>



```
1. Get request for rocket launch data using API

In [6]: spacex_url="https://api.spacexdata.com/v4/launches/past"

In [7]: response = requests.get(spacex_url)

2. Use json_normalize method to convert json result to dataframe

In [12]: # Use json_normalize method to convert the json result into a dataframe
         # decode response content as json
         static_json_df = res.json()

In [13]: # apply json_normalize
         data = pd.json_normalize(static_json_df)

3. We then performed data cleaning and filling in the missing values


In [30]: rows = data_falcon9['PayloadMass'].values.tolist()[0]

         df_rows = pd.DataFrame(rows)
         df_rows = df_rows.replace(np.nan, PayloadMass)

         data_falcon9['PayloadMass'][0] = df_rows.values
         data_falcon9
```


Data Collection - Scraping

- We applied web scrapping to webscrap Falcon 9 launch records with BeautifulSoup
- We parsed the table and converted it into a pandas dataframe.
- The link to the notebook is <https://github.com/Tarkhon/IBM-Final-Project-of-Applied-Data-Science-Capstone>

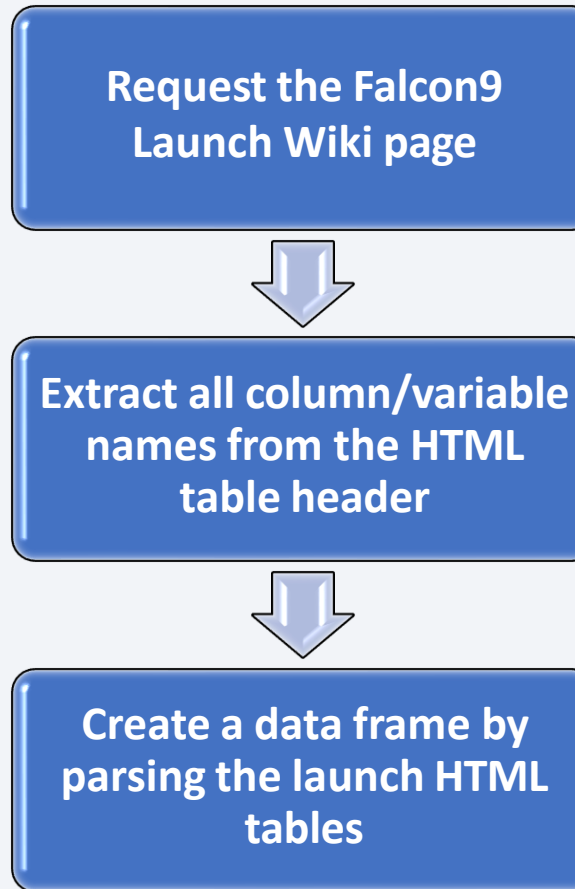

1. Apply HTTP Get method to request the Falcon 9 rocket launch page

```
In [4]: static_url = "https://en.wikipedia.org/w/index.php?title=List_of_Falcon_9_and_Falcon_Heavy_launches&oldid=1027686922"
```

```
In [5]: # use requests.get() method with the provided static_url
# assign the response to a object
html_data = requests.get(static_url)
html_data.status_code
```

```
Out[5]: 200
```

2. Create a BeautifulSoup object from the HTML response

```
In [6]: # Use BeautifulSoup() to create a BeautifulSoup object from a response text content
soup = BeautifulSoup(html_data.text, 'html.parser')
```

Print the page title to verify if the BeautifulSoup object was created properly

```
In [7]: # Use soup.title attribute
soup.title
```

```
Out[7]: <title>List of Falcon 9 and Falcon Heavy launches - Wikipedia</title>
```

3. Extract all column names from the HTML table header


```
In [10]: column_names = []

# Apply find_all() function with 'th' element on first_launch_table
# Iterate each th element and apply the provided extract_column_from_header() to get a column name
# Append the Non-empty column name ('if name is not None and len(name) > 0') into a list called column_names


element = soup.find_all('th')
for row in range(len(element)):
    try:
        name = extract_column_from_header(element[row])
        if (name is not None and len(name) > 0):
            column_names.append(name)
    except:
        pass
```

4. Create a dataframe by parsing the launch HTML tables
5. Export data to csv

Data Wrangling


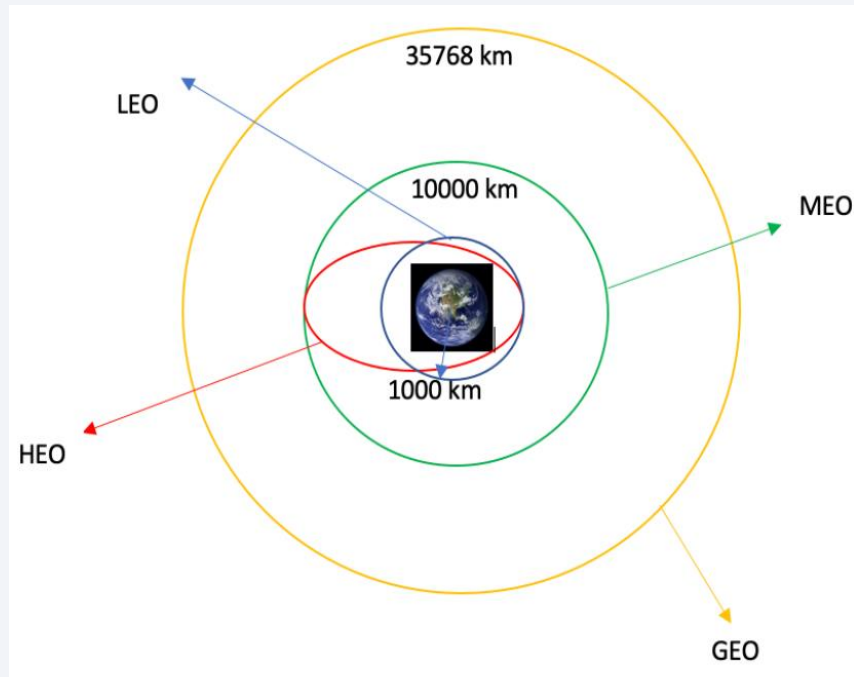


- We performed exploratory data analysis and determined the training labels.
- We calculated the number of launches at each site, and the number and occurrence of each orbits
- We created landing outcome label from outcome column and exported the results to csv.
- The link to the notebook is <https://github.com/Tarkhon/IBM-Final-Project-of-Applied-Data-Science-Capstone>

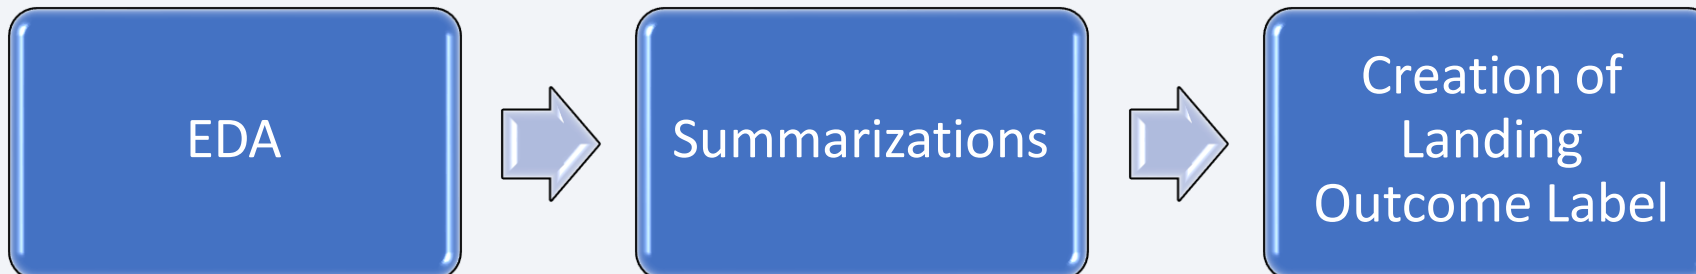

EDA with Data Visualization

- We explored the data by visualizing the relationship between flight number and launch Site, payload and launch site, success rate of each orbit type, flight number and orbit type, the launch success yearly trend.

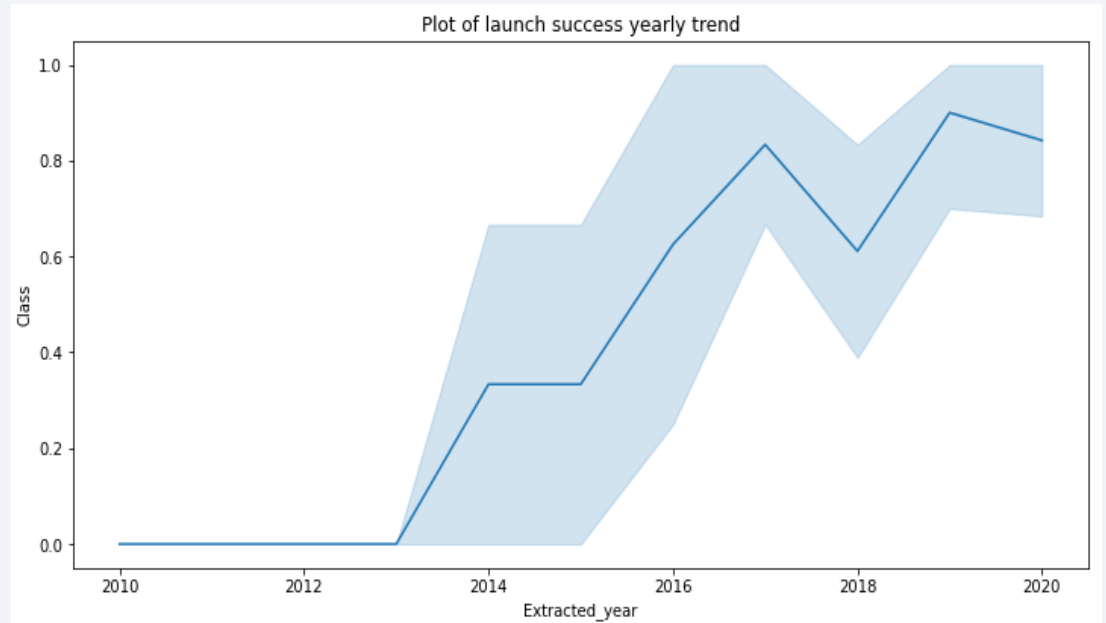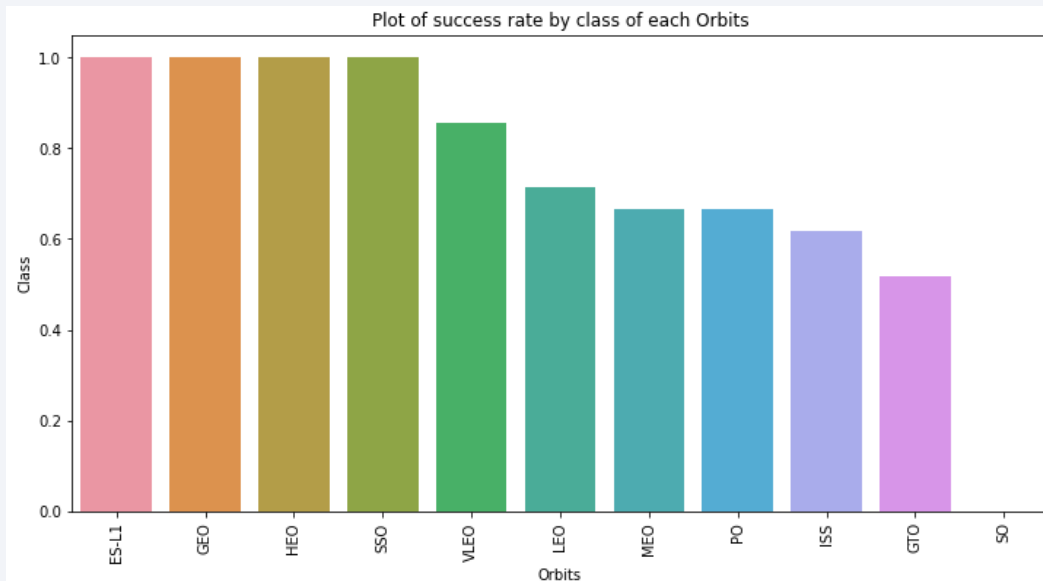

The link to the notebook is
<https://github.com/Tarkhon/IBM-Final-Project-of-Applied-Data-Science-Capstone>

EDA with SQL

- We loaded the SpaceX dataset into a PostgreSQL database without leaving the jupyter notebook.
- We applied EDA with SQL to get insight from the data. We wrote queries to find out for instance:
 - The names of unique launch sites in the space mission.
 - The total payload mass carried by boosters launched by NASA (CRS)
 - The average payload mass carried by booster version F9 v1.1
 - The total number of successful and failure mission outcomes
 - The failed landing outcomes in drone ship, their booster version and launch site names.
- The link to the notebook is <https://github.com/Tarkhon/IBM-Final-Project-of-Applied-Data-Science-Capstone>

Build an Interactive Map with Folium


- We marked all launch sites, and added map objects such as markers, circles, lines to mark the success or failure of launches for each site on the folium map.
- We assigned the feature launch outcomes (failure or success) to class 0 and 1.i.e., 0 for failure, and 1 for success.
- Using the color-labeled marker clusters, we identified which launch sites have relatively high success rate.
- We calculated the distances between a launch site to its proximities. We answered some question for instance:
 - Are launch sites near railways, highways and coastlines.
 - Do launch sites keep certain distance away from cities.

Build a Dashboard with Plotly Dash

- We built an interactive dashboard with Plotly dash
- We plotted pie charts showing the total launches by a certain sites
- We plotted scatter graph showing the relationship with Outcome and Payload Mass (Kg) for the different booster version.
- The link to the notebook is <https://github.com/Tarkhon/IBM-Final-Project-of-Applied-Data-Science-Capstone>

Predictive Analysis (Classification)

- We loaded the data using numpy and pandas, transformed the data, split our data into training and testing.
- We built different machine learning models and tune different hyperparameters using GridSearchCV.
- We used accuracy as the metric for our model, improved the model using feature engineering and algorithm tuning.
- We found the best performing classification model.
- The link to the notebook is <https://github.com/Tarkhon/IBM-Final-Project-of-Applied-Data-Science-Capstone>

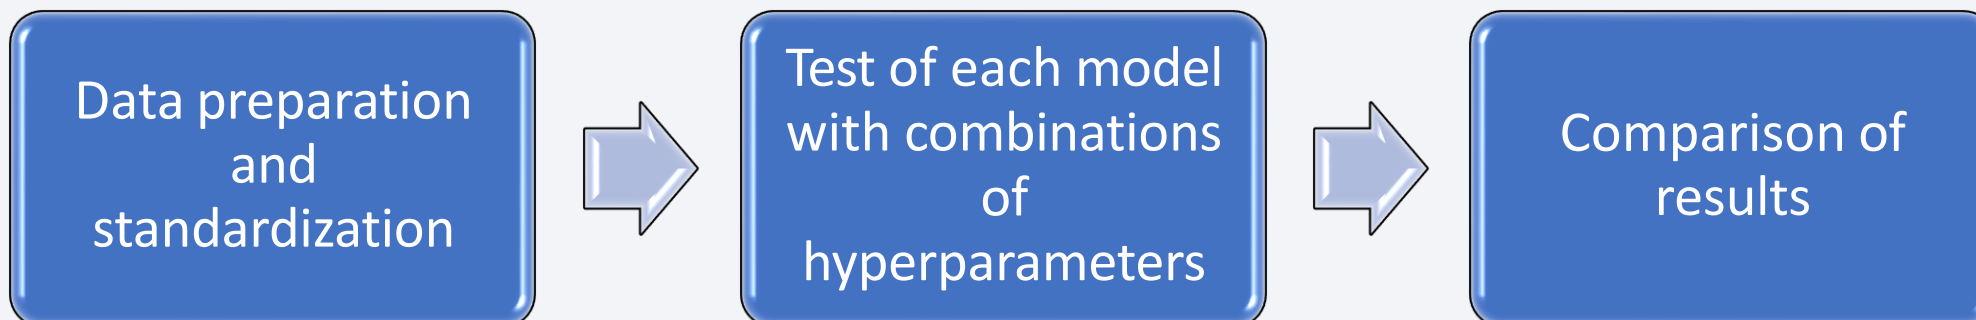


Results

- Exploratory data analysis results:
 - Space X uses 4 different launch sites;
 - The first launches were done to Space X itself and NASA;
 - The average payload of F9 v1.1 booster is 2,928 kg;
 - The first success landing outcome happened in 2015 five year after the first launch;
 - Many Falcon 9 booster versions were successful at landing in drone ships having payload above the average;
 - Almost 100% of mission outcomes were successful;
 - Two booster versions failed at landing in drone ships in 2015: F9 v1.1 B1012 and F9 v1.1 B1015;
 - The number of landing outcomes became as better as years passed.


Results

- Using interactive analytics was possible to identify that launch sites use to be in safety places, near sea, for example and have a good logistic infrastructure around.
- Most launches happens at east cost launch sites.

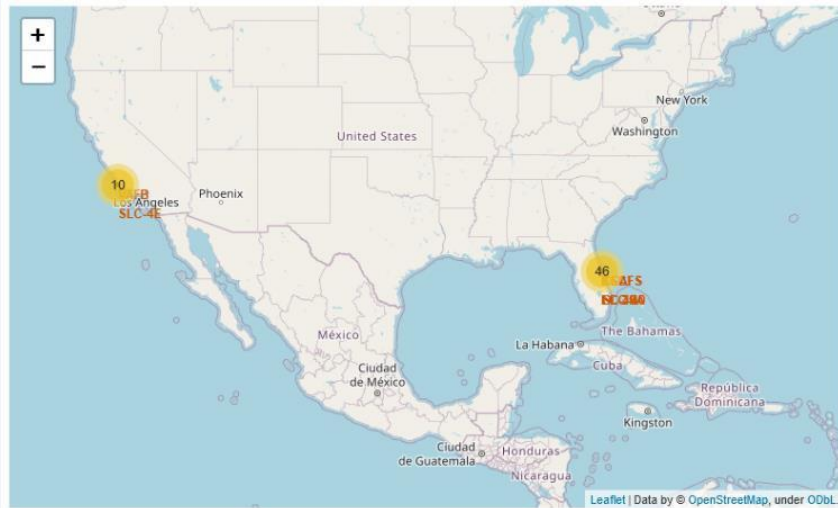

Results

- Predictive Analysis showed that Decision Tree Classifier is the best model to predict successful landings, having accuracy over 87% and accuracy for test data over 94%.

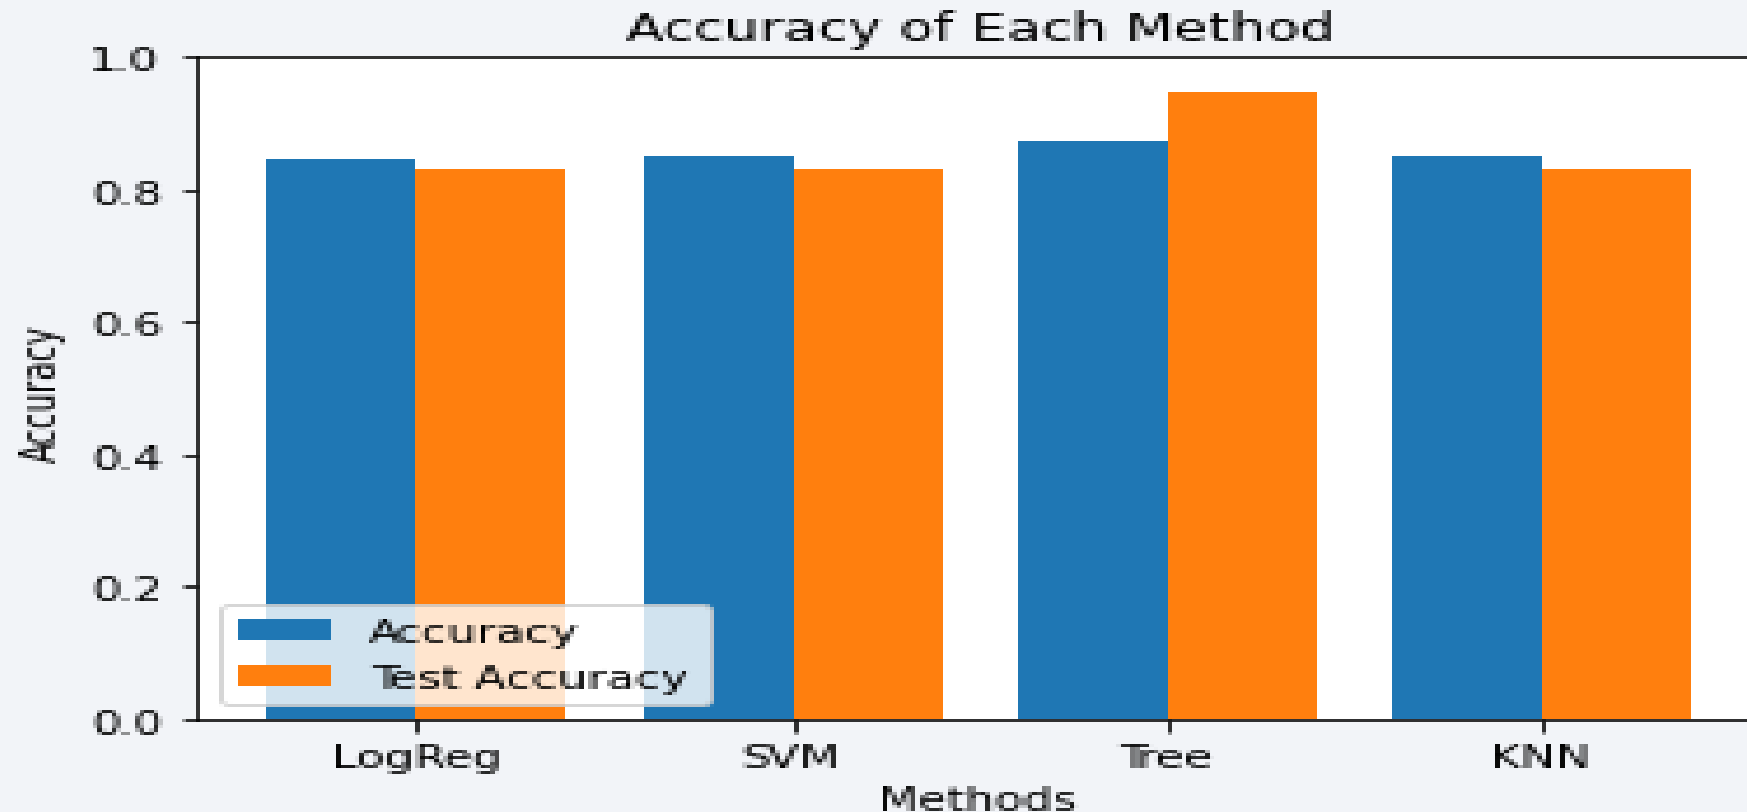


The background of the slide is an abstract composition. It features a dark blue base color. Overlaid on this are numerous diagonal streaks in shades of red and cyan. A faint, light blue grid pattern is also visible, particularly in the lower-left quadrant. The overall effect is dynamic and technological.

Section 2

Insights drawn from EDA


Flight Number vs. Launch Site

- From the plot, we found that the larger the flight amount at a launch site, the greater the success rate at a launch site.

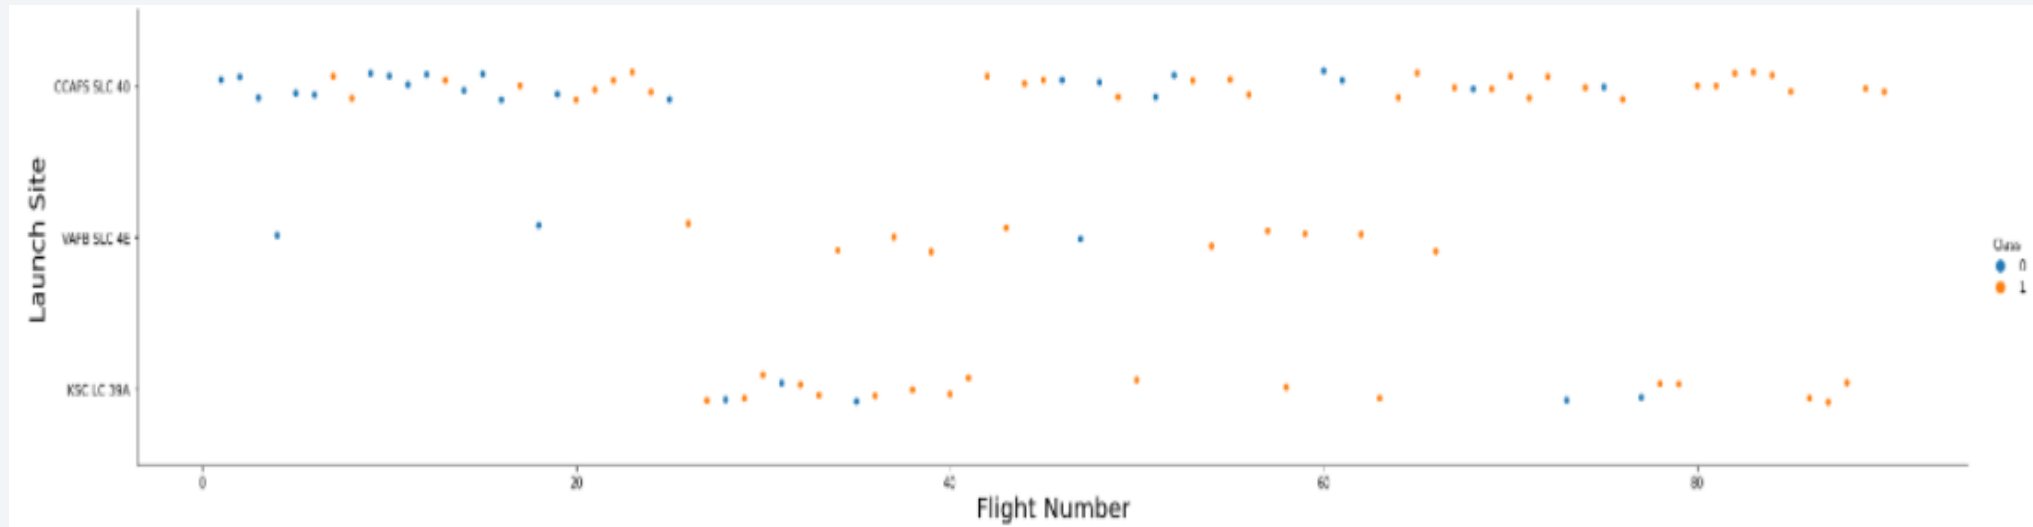

- According to the plot above, it's possible to verify that the best launch site nowadays is CCAFS SLC 40, where most of recent launches were successful;
- In second place VAFB SLC 4E and third place KSC LC 39A;
- It's also possible to see that the general success rate improved over time.


Payload vs. Launch Site

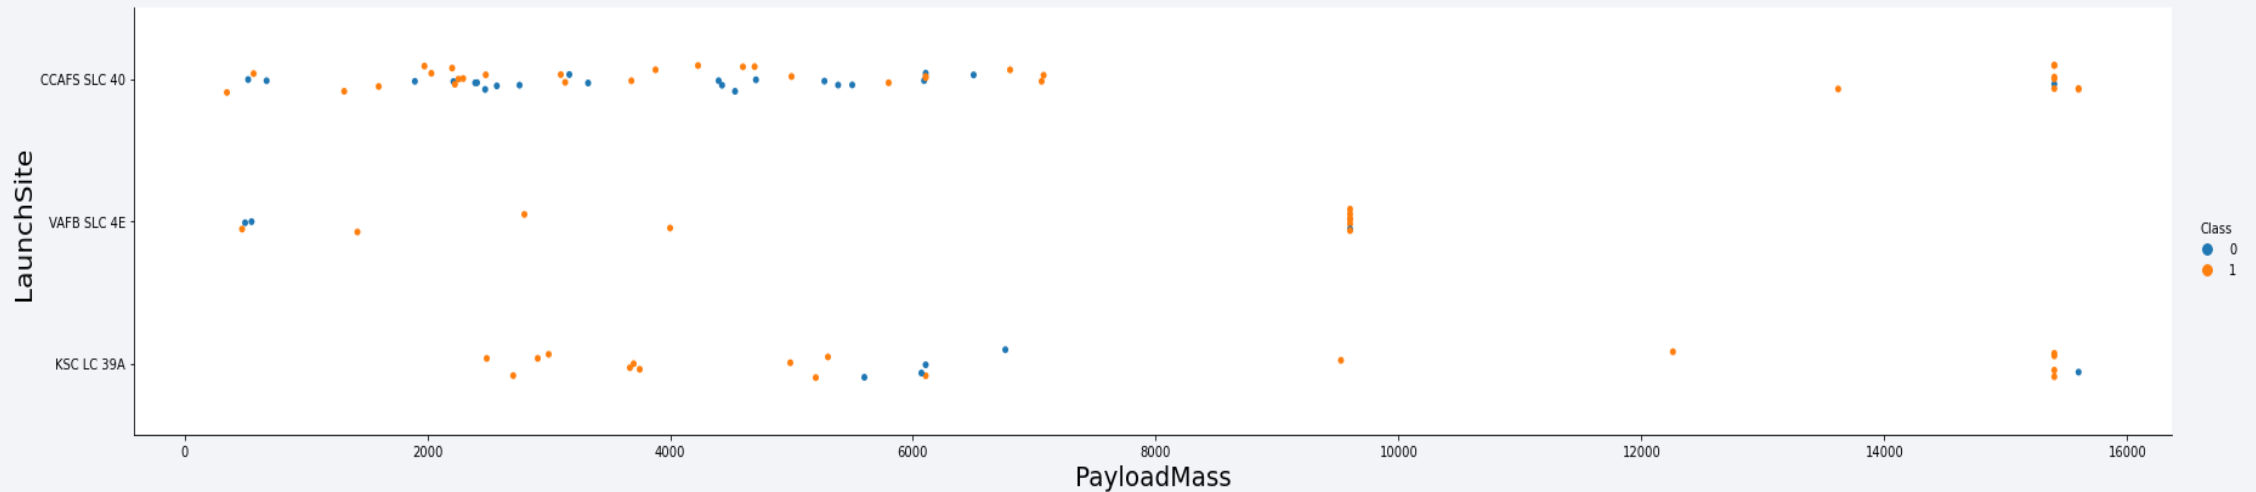


- Payloads over 9,000kg (about the weight of a school bus) have excellent success rate;
- Payloads over 12,000kg seems to be possible only on CCAFS SLC 40 and KSC LC 39A launch sites.

Success Rate vs. Orbit Type

- The biggest success rates happens to orbits:
 - ES-L1;
 - GEO;
 - HEO; and
 - SSO.
- Followed by:
 - VLEO (above 80%); and
 - LFO (above 70%).

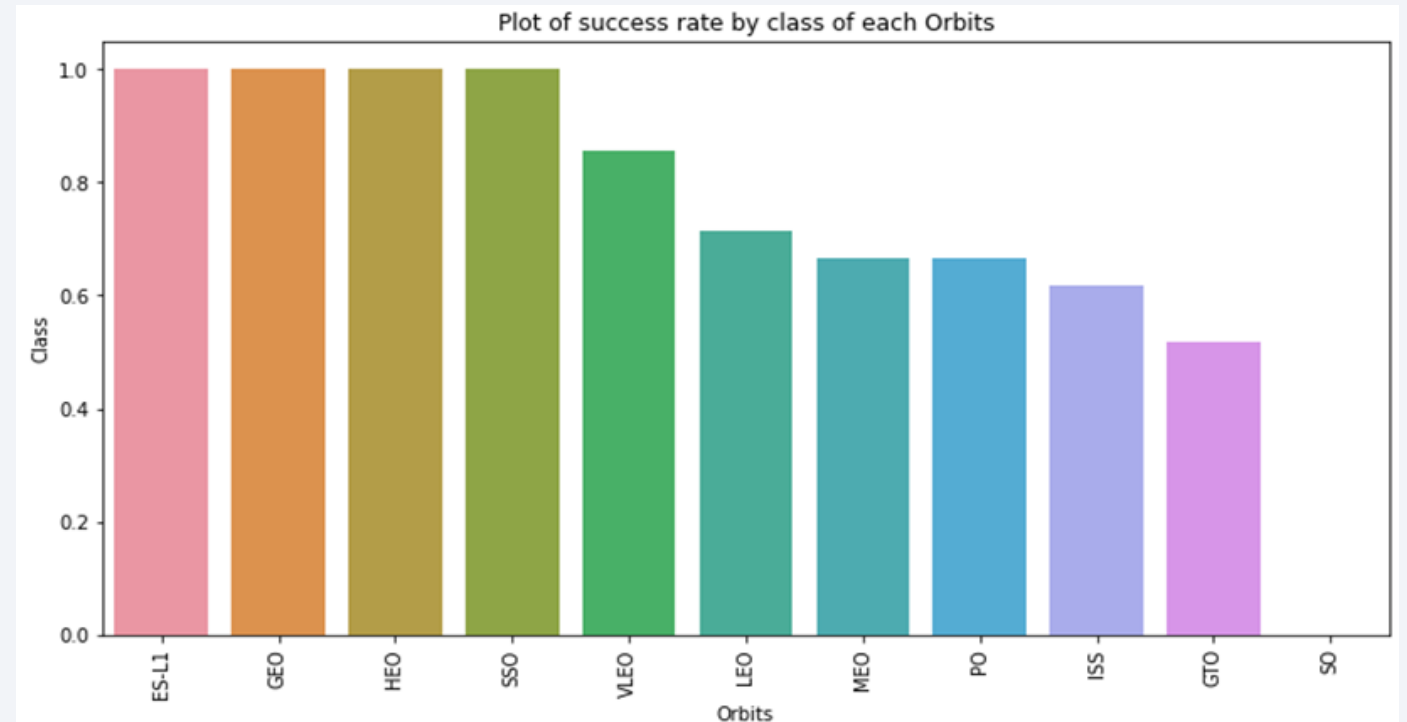


Flight Number vs. Orbit Type

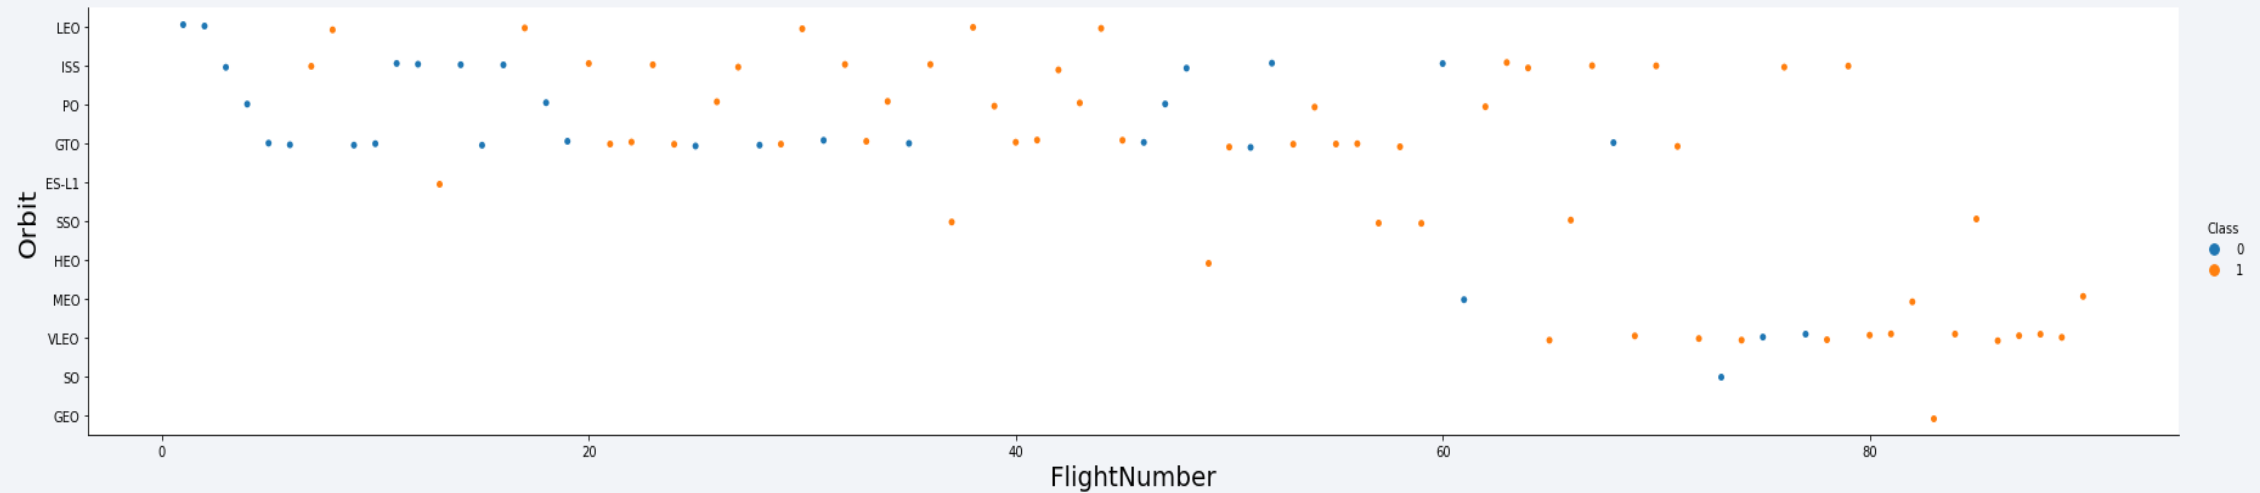

- Apparently, success rate improved over time to all orbits;
- VLEO orbit seems a new business opportunity, due to recent increase of its frequency.


Payload vs. Orbit Type

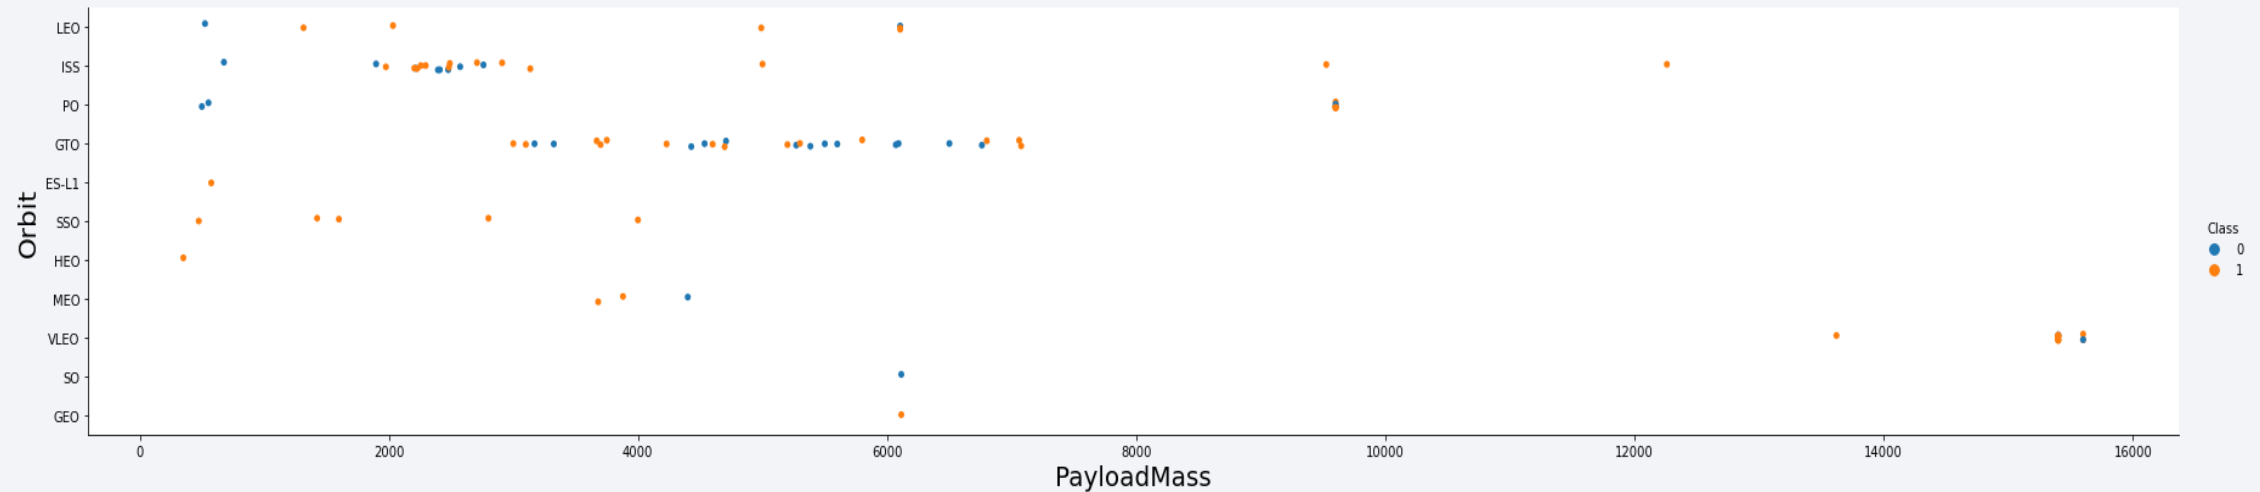

- Apparently, there is no relation between payload and success rate to orbit GTO;
- ISS orbit has the widest range of payload and a good rate of success;
- There are few launches to the orbits SO and GEO.

Launch Success Yearly Trend

- Success rate started increasing in 2013 and kept until 2020;
- It seems that the first three years were a period of adjusts and improvement of technology.

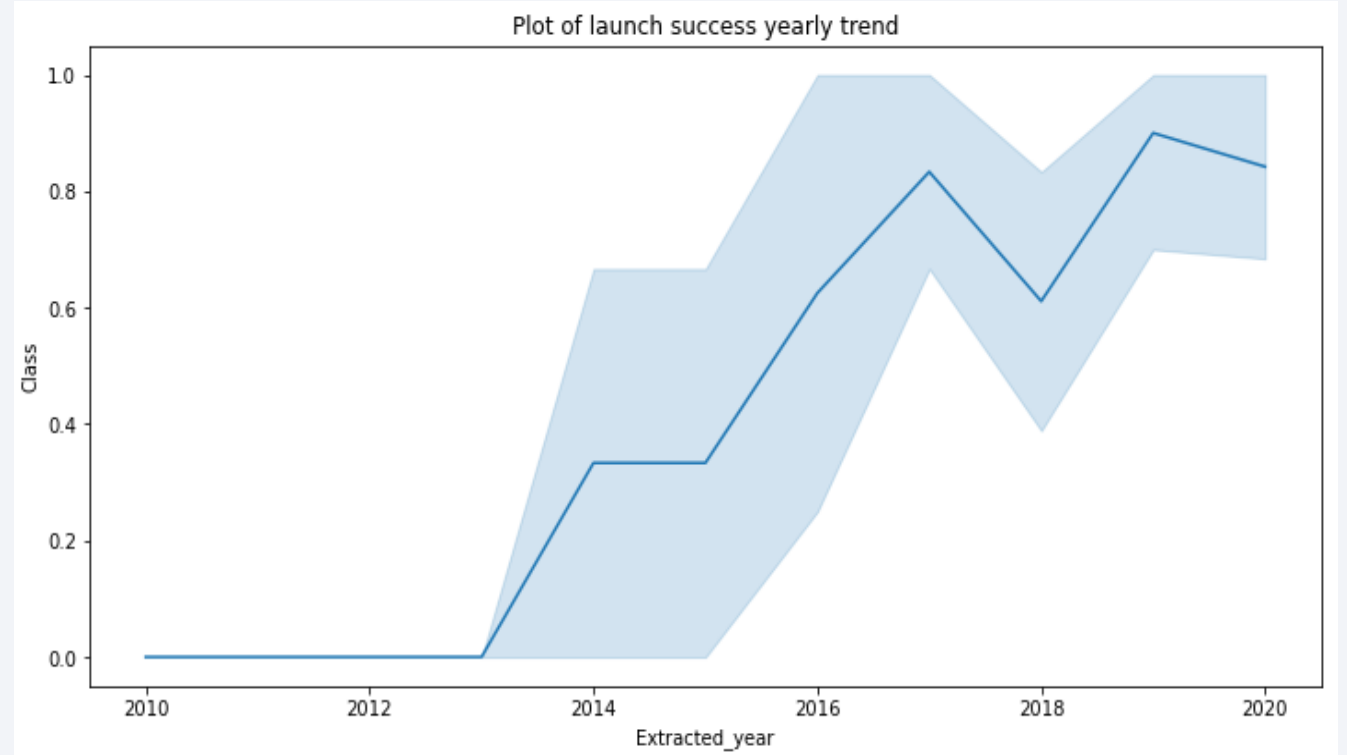

All Launch Site Names

- We used the key word **DISTINCT** to show only unique launch sites from the SpaceX data.

Display the names of the unique launch sites in the space mission

```
In [10]: task_1 = '''  
          SELECT DISTINCT LaunchSite  
          FROM SpaceX  
          ...  
          create_pandas_df(task_1, database=conn)
```

```
Out[10]:
```

	launchsite
0	KSC LC-39A
1	CCAFS LC-40
2	CCAFS SLC-40
3	VAFB SLC-4E

Launch Site Names Begin with 'CCA'

Display 5 records where launch sites begin with the string 'CCA'

In [11]:

```
task_2 = '''
    SELECT *
    FROM SpaceX
    WHERE LaunchSite LIKE 'CCA%'
    LIMIT 5
    '''
create_pandas_df(task_2, database=conn)
```

Out[11]:

	date	time	boosterversion	launchsite	payload	payloadmasskg	orbit	customer	missionoutcome	landingoutcome
0	2010-04-06	18:45:00	F9 v1.0 B0003	CCAFS LC-40	Dragon Spacecraft Qualification Unit	0	LEO	SpaceX	Success	Failure (parachute)
1	2010-08-12	15:43:00	F9 v1.0 B0004	CCAFS LC-40	Dragon demo flight C1, two CubeSats, barrel of...	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2	2012-05-22	07:44:00	F9 v1.0 B0005	CCAFS LC-40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
3	2012-08-10	00:35:00	F9 v1.0 B0006	CCAFS LC-40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
4	2013-01-03	15:10:00	F9 v1.0 B0007	CCAFS LC-40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt

- We used the query above to display 5 records where launch sites begin with 'CCA'

Total Payload Mass

- Total payload carried by boosters from NASA:

Total Payload (kg)
111.268

- Total payload calculated above, by summing all payloads whose codes contain 'CRS', which corresponds to NASA.

Average Payload Mass by F9 v1.1

- Average payload mass carried by booster version F9 v1.1:

```
Display average payload mass carried by booster version F9 v1.1

In [13]: task_4 = '''
          SELECT AVG(PayloadMassKG) AS Avg_PayloadMass
          FROM SpaceX
          WHERE BoosterVersion = 'F9 v1.1'
          '''

          create_pandas_df(task_4, database=conn)

Out[13]:
```

	avg_payloadmass
0	2928.4

- Filtering data by the booster version above and calculating the average payload mass we obtained the value of 2,928 kg.

First Successful Ground Landing Date

- First successful landing outcome on ground pad:

```
In [14]: task_5 = '''
          SELECT MIN(Date) AS FirstSuccessfull_landing_date
          FROM SpaceX
          WHERE LandingOutcome LIKE 'Success (ground pad)'
          '''

          create_pandas_df(task_5, database=conn)

Out[14]:
```

	firstsuccessfull_landing_date
0	2015-12-22

- By filtering data by successful landing outcome on ground pad and getting the minimum value for date it's possible to identify the first occurrence, that happened on 12/22/2015.

Successful Drone Ship Landing with Payload between 4000 and 6000

```
In [15]: task_6 = '''
          SELECT BoosterVersion
          FROM SpaceX
          WHERE LandingOutcome = 'Success (drone ship)'
             AND PayloadMassKG > 4000
             AND PayloadMassKG < 6000
          ...
          create_pandas_df(task_6, database=conn)
```

```
Out[15]:
```

	boosterversion
0	F9 FT B1022
1	F9 FT B1026
2	F9 FT B1021.2
3	F9 FT B1031.2

- We used the **WHERE** clause to filter for boosters which have successfully landed on drone ship and applied the **AND** condition to determine successful landing with payload mass greater than 4000 but less than 6000

Total Number of Successful and Failure Mission Outcomes

List the total number of successful and failure mission outcomes

```
In [16]: task_7a = '''
          SELECT COUNT(MissionOutcome) AS SuccessOutcome
          FROM SpaceX
          WHERE MissionOutcome LIKE 'Success%'
          '''

          task_7b = '''
          SELECT COUNT(MissionOutcome) AS FailureOutcome
          FROM SpaceX
          WHERE MissionOutcome LIKE 'Failure%'
          '''

          print('The total number of successful mission outcome is:')
          display(create_pandas_df(task_7a, database=conn))
          print()
          print('The total number of failed mission outcome is:')
          create_pandas_df(task_7b, database=conn)
```

The total number of successful mission outcome is:

	successoutcome
0	100

The total number of failed mission outcome is:

```
Out[16]: failureoutcome
0         1
```

- We used wildcard like ‘%’ to filter for **WHERE** MissionOutcome was a success or a failure.

Boosters Carried Maximum Payload

- We determined the booster that have carried the maximum payload using a subquery in the **WHERE** clause and the **MAX()** function.

List the names of the booster_versions which have carried the maximum payload mass. Use a subquery

```
In [17]: task_8 = '''
          SELECT BoosterVersion, PayloadMassKG
          FROM SpaceX
          WHERE PayloadMassKG = (
                                SELECT MAX(PayloadMassKG)
                                FROM SpaceX
                                )
          ORDER BY BoosterVersion
          '''
          create_pandas_df(task_8, database=conn)
```

```
Out[17]:
```

	boosterversion	payloadmasskg
0	F9 B5 B1048.4	15600
1	F9 B5 B1048.5	15600
2	F9 B5 B1049.4	15600
3	F9 B5 B1049.5	15600
4	F9 B5 B1049.7	15600
5	F9 B5 B1051.3	15600
6	F9 B5 B1051.4	15600
7	F9 B5 B1051.6	15600
8	F9 B5 B1056.4	15600
9	F9 B5 B1058.3	15600
10	F9 B5 B1060.2	15600
11	F9 B5 B1060.3	15600

2015 Launch Records

- We used a combinations of the **WHERE** clause, **LIKE**, **AND**, and **BETWEEN** conditions to filter for failed landing outcomes in drone ship, their booster versions, and launch site names for year 2015

List the failed landing_outcomes in drone ship, their booster versions, and launch site names for in year 2015

```
In [18]: task_9 = '''
          SELECT BoosterVersion, LaunchSite, LandingOutcome
          FROM SpaceX
          WHERE LandingOutcome LIKE 'Failure (drone ship)'
             AND Date BETWEEN '2015-01-01' AND '2015-12-31'
          ...
          create_pandas_df(task_9, database=conn)
```

Out[18]:

	boosterversion	launchsite	landingoutcome
0	F9 v1.1 B1012	CCAFS LC-40	Failure (drone ship)
1	F9 v1.1 B1015	CCAFS LC-40	Failure (drone ship)

Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

Rank the count of landing outcomes (such as Failure (drone ship) or Success (ground pad))

```
In [19]: task_10 = '''
          SELECT LandingOutcome, COUNT(LandingOutcome)
          FROM SpaceX
          WHERE DATE BETWEEN '2010-06-04' AND '2017-03-20'
          GROUP BY LandingOutcome
          ORDER BY COUNT(LandingOutcome) DESC
          '''
          create_pandas_df(task_10, database=conn)
```

```
Out[19]:
```

	landingoutcome	count
0	No attempt	10
1	Success (drone ship)	6
2	Failure (drone ship)	5
3	Success (ground pad)	5
4	Controlled (ocean)	3
5	Uncontrolled (ocean)	2
6	Precluded (drone ship)	1
7	Failure (parachute)	1

- We selected Landing outcomes and the **COUNT** of landing outcomes from the data and used the **WHERE** clause to filter for landing outcomes **BETWEEN** 2010-06-04 to 2010-03-20.
- We applied the **GROUP BY** clause to group the landing outcomes and the **ORDER BY** clause to order the grouped landing outcome in descending order.

A satellite view of Earth from space, showing the curvature of the planet and city lights at night. The background is a deep blue gradient.


Section 3

Launch Sites Proximities Analysis




All launch sites global map markers



Markers showing launch sites with color labels

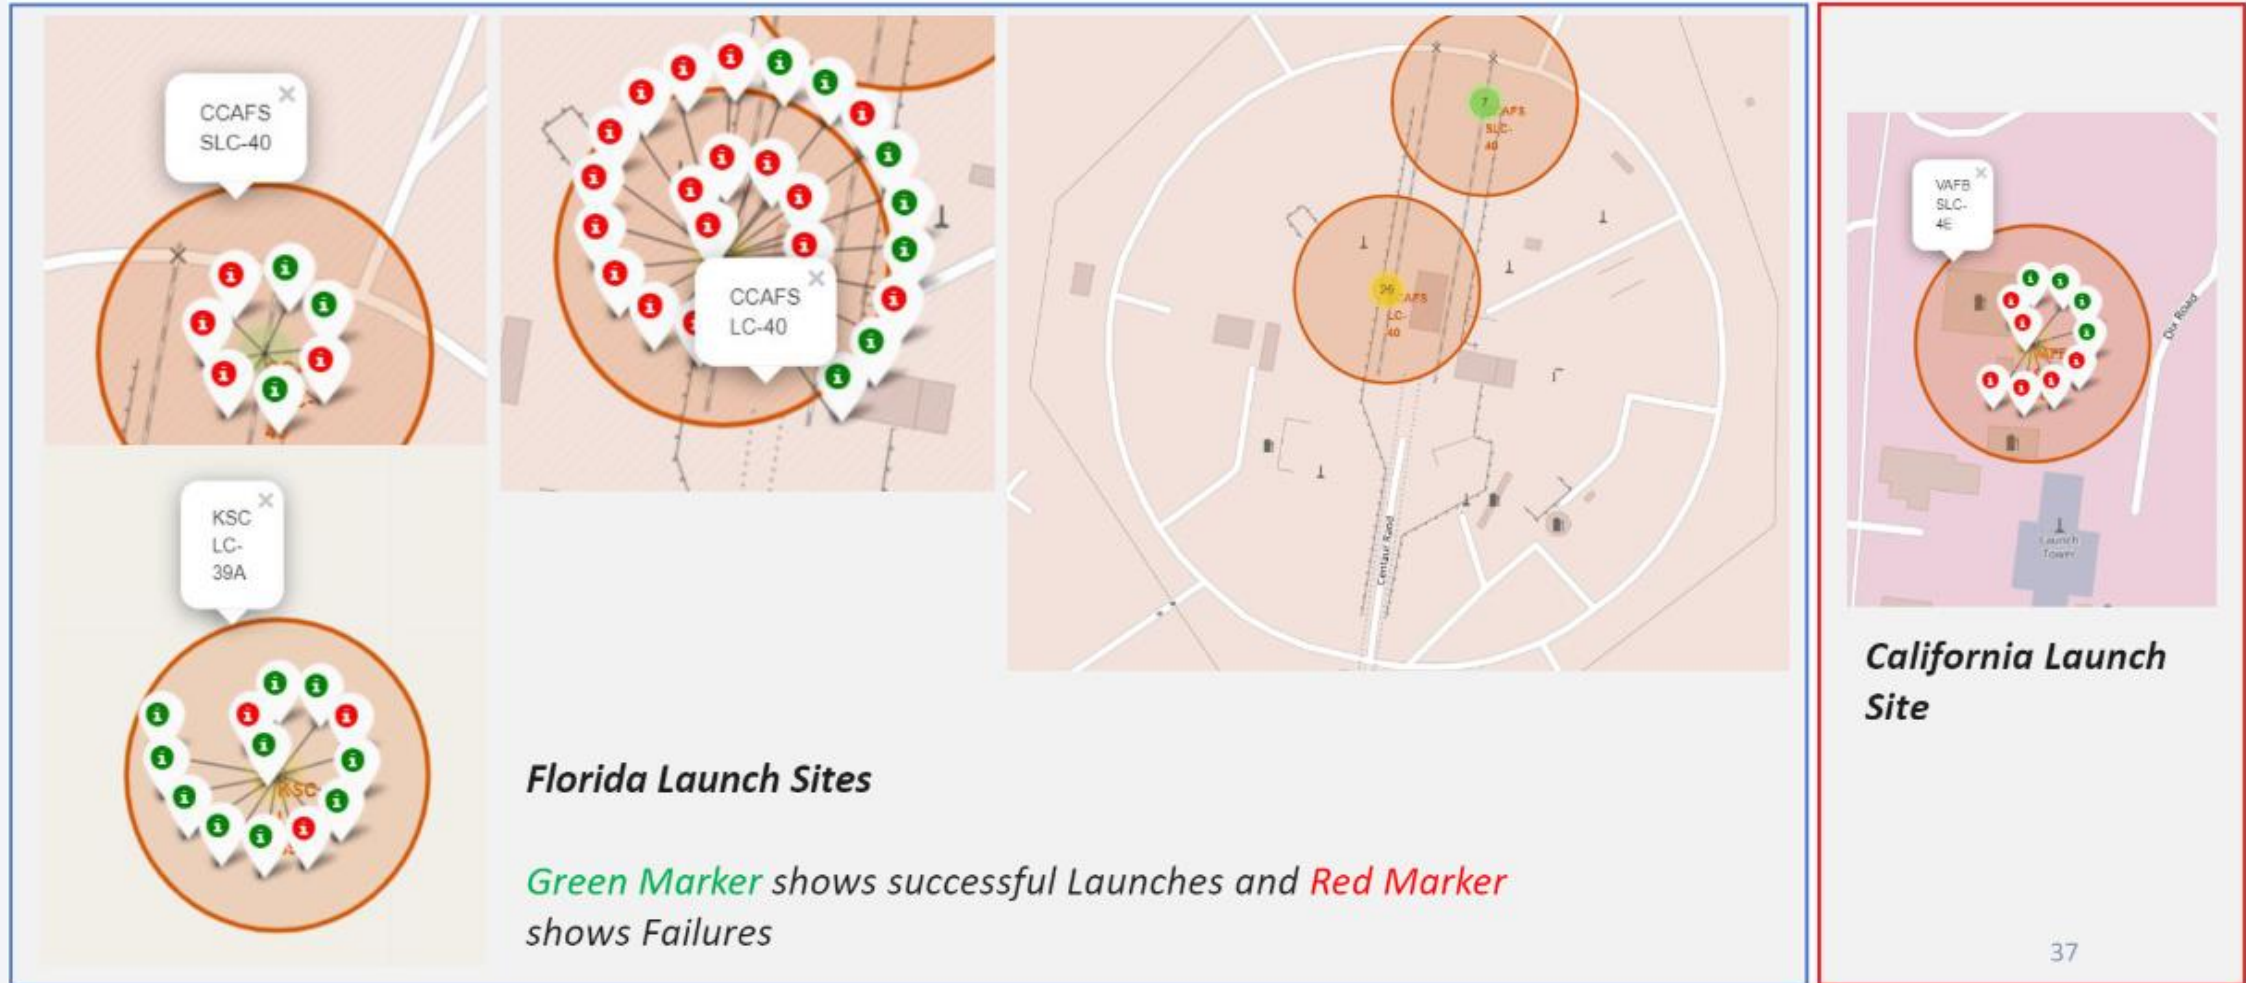

Launch Site distance to landmarks

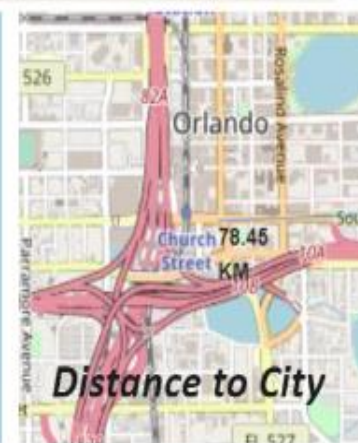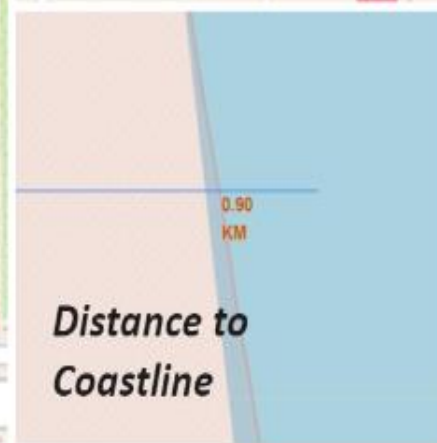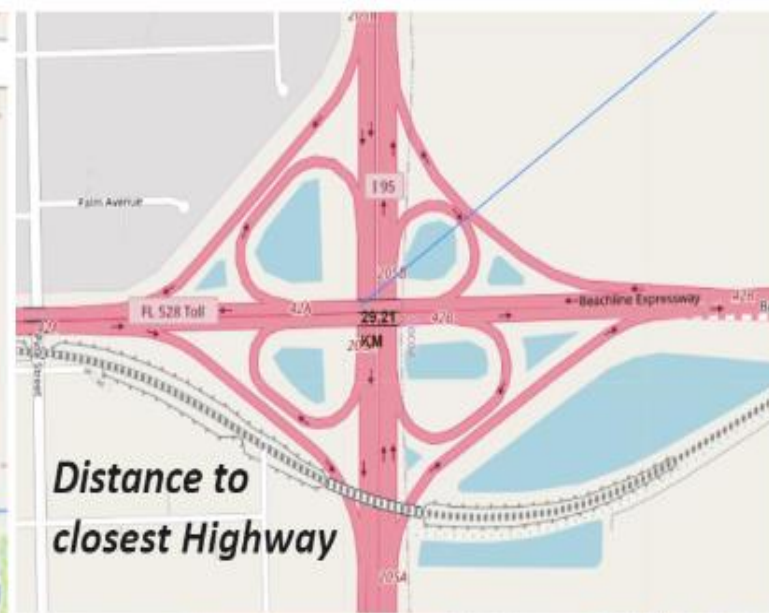

- Are launch sites in close proximity to railways? No
- Are launch sites in close proximity to highways? No
- Are launch sites in close proximity to coastline? Yes
- Do launch sites keep certain distance away from cities? Yes




Section 4

Build a Dashboard with Plotly Dash


Pie chart showing the success percentage achieved by each launch site

Total Success Launches By all sites

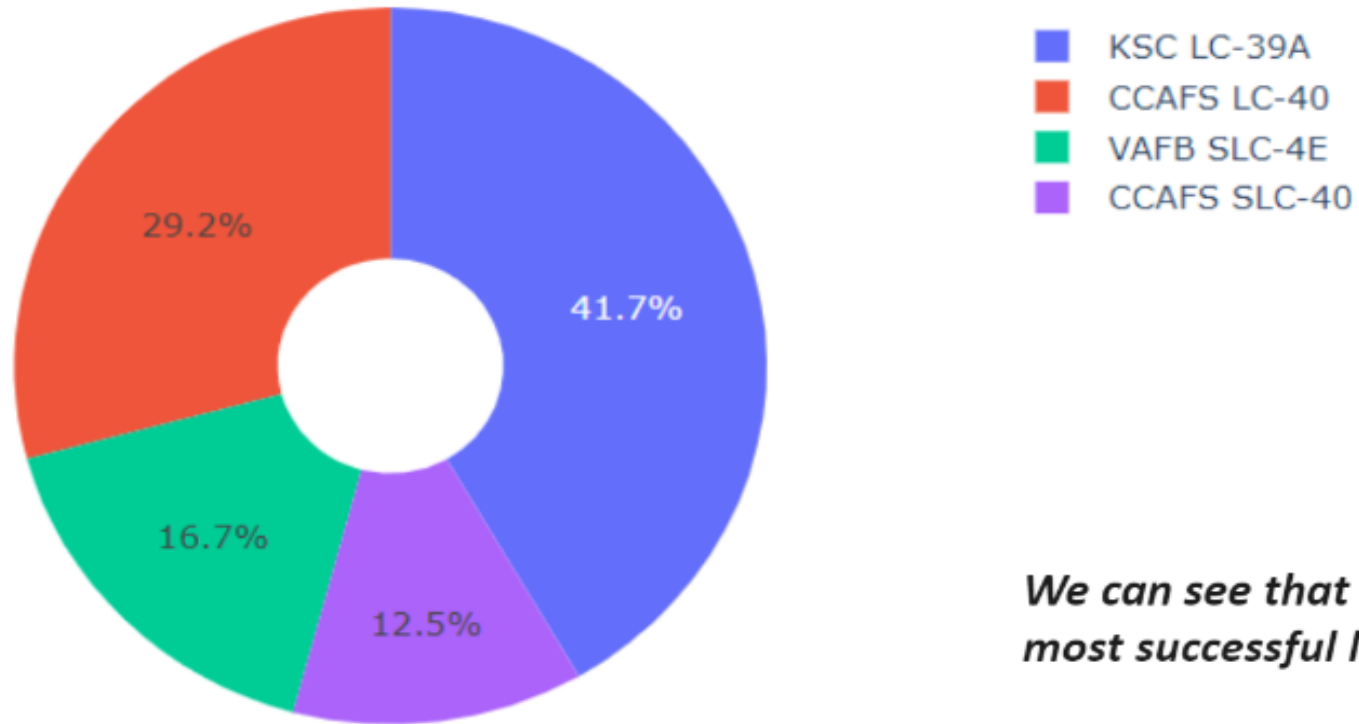


We can see that KSC LC-39A had the most successful launches from all the sites

Pie chart showing the Launch site with the highest launch success ratio

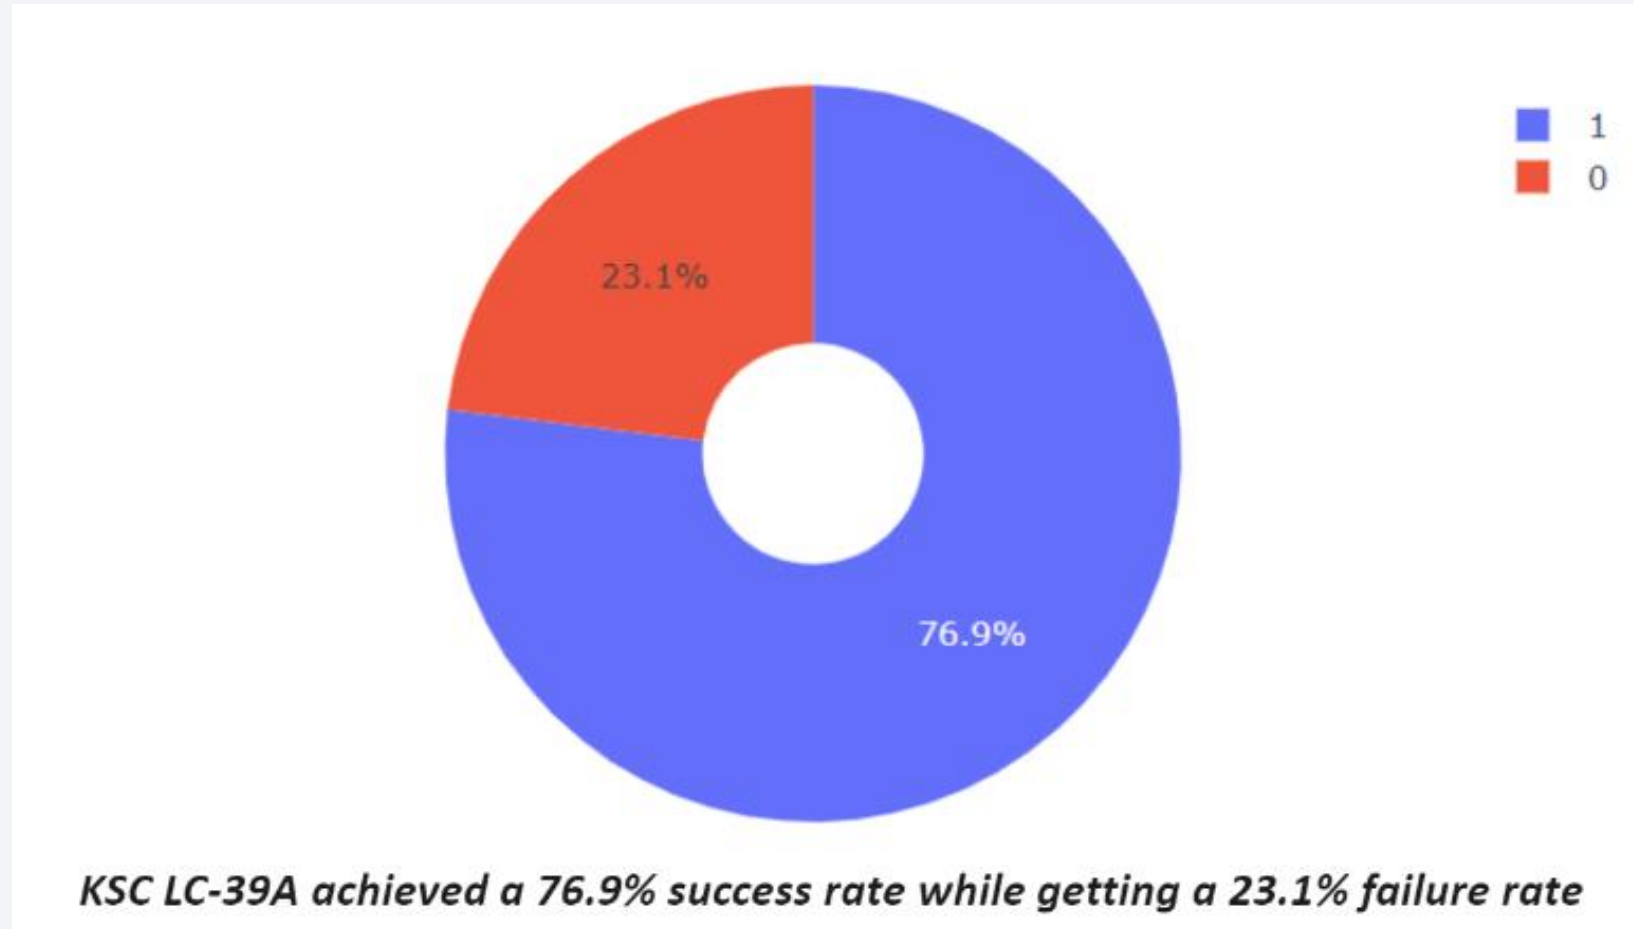

Scatter plot of Payload vs Launch Outcome for all sites, with different payload selected in the range slider

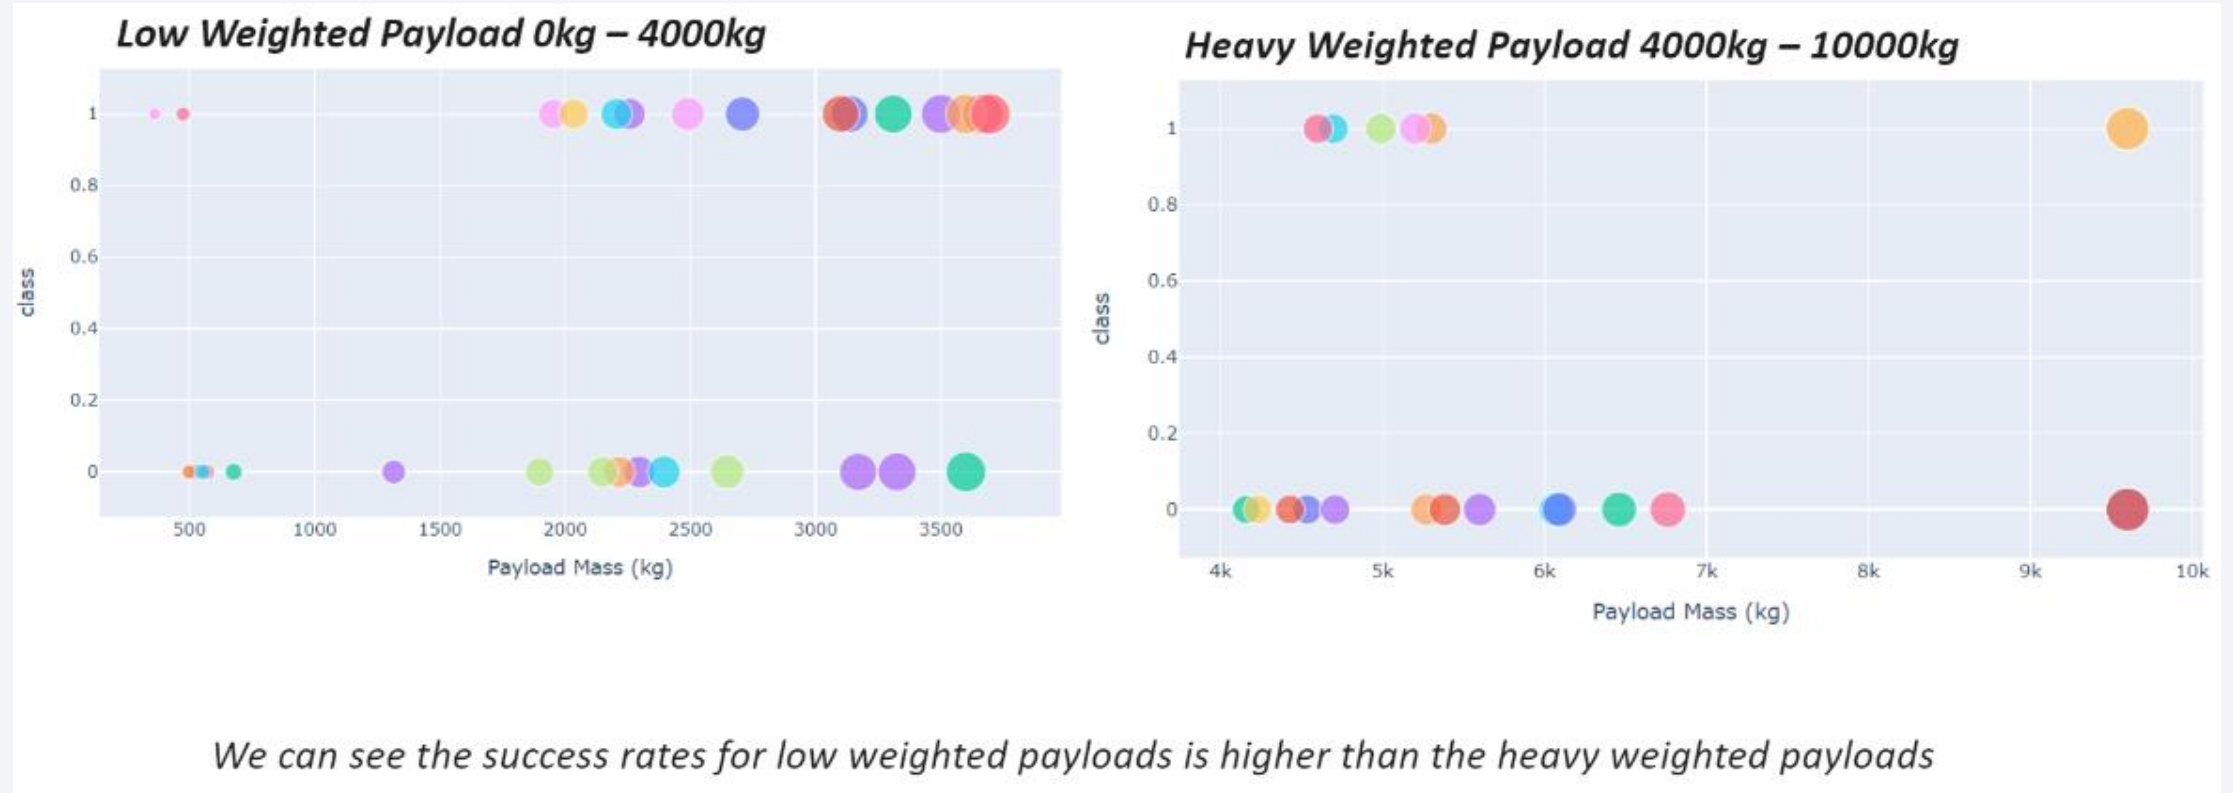

Section 5

Predictive Analysis (Classification)

Classification Accuracy

- The decision tree classifier is the model with the highest classification accuracy

```
models = {'KNeighbors':knn_cv.best_score_,
          'DecisionTree':tree_cv.best_score_,
          'LogisticRegression':logreg_cv.best_score_,
          'SupportVector': svm_cv.best_score_}


bestalgorithm = max(models, key=models.get)
print('Best model is', bestalgorithm,'with a score of', models[bestalgorithm])
if bestalgorithm == 'DecisionTree':
    print('Best params is :', tree_cv.best_params_)
if bestalgorithm == 'KNeighbors':
    print('Best params is :', knn_cv.best_params_)
if bestalgorithm == 'LogisticRegression':
    print('Best params is :', logreg_cv.best_params_)
if bestalgorithm == 'SupportVector':
    print('Best params is :', svm_cv.best_params_)
```

Best model is DecisionTree with a score of 0.8732142857142856

Best params is : {'criterion': 'gini', 'max_depth': 6, 'max_features': 'auto', 'min_samples_leaf': 2, 'min_samples_split': 5, 'splitter': 'random'}

Confusion Matrix

- The confusion matrix for the decision tree classifier shows that the classifier can distinguish between the different classes. The major problem is the false positives .i.e., unsuccessful landing marked as successful landing by the classifier.

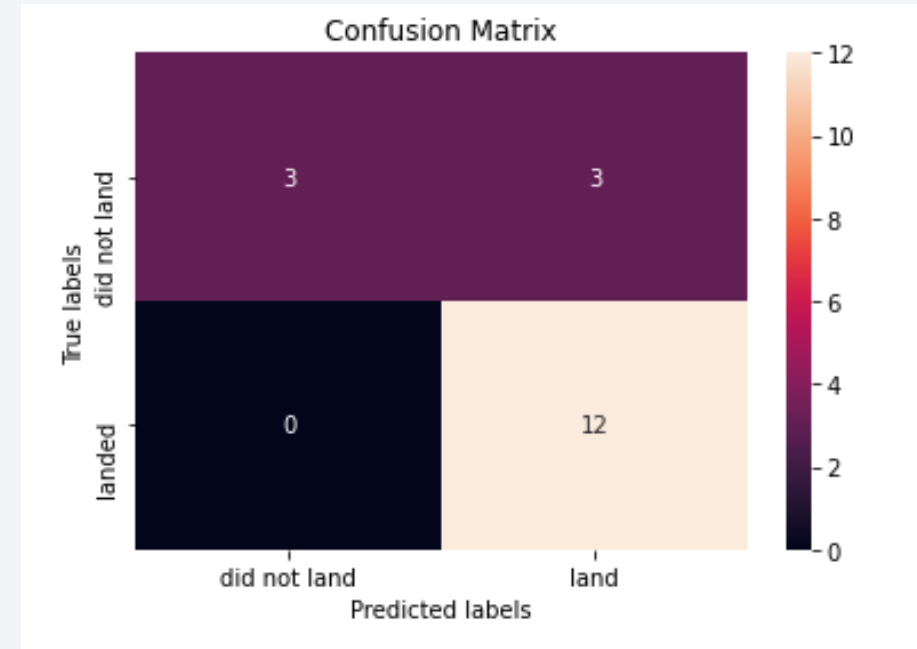

Conclusions

We can conclude that:

- The larger the flight amount at a launch site, the greater the success rate at a launch site.
- Launch success rate started to increase in 2013 till 2020.
- Orbits ES-L1, GEO, HEO, SSO, VLEO had the most success rate.
- KSC LC-39A had the most successful launches of any sites.
- The Decision tree classifier is the best machine learning algorithm for this task.

Appendix

- As an improvement for model tests, it's important to set a value to
- `np.random.seed(variable);`
- Folium didn't show maps on Github, so I took screenshots.

Thank you!

