

B. Screenshots

The screenshot shows a Google Colab notebook titled "PS-Module3_Original.ipynb". The left sidebar displays the file explorer with folders "Module 3", "drive", and "sample_data". The main code area contains the following cells:

```

[0] """!pip install --upgrade flask-ngrok
!pip install pyngrok==4.1.1
!ngrok authtoken '2dxTaVPWZ3j1V3KBSeYAyUf3C6m_4Z09PKrLg2epcDyk7hkXk'"""

[1] '!pip install --upgrade flask-ngrok\n!pip install pyngrok==4.1.1\n!ngrok authtoken '2dxTaVPWZ3j1V3KBSeYAyUf3C6m_4Z09PKrLg2epcDyk7hkXk''

[6] NGROK_TOKEN = "2dxX4lGdEvnmrA1CwAenK12KwMb_34uJcRbtS94EiXtQa8xKc"
!pip install flask
!pip install pyngrok

from pyngrok import ngrok, conf
ngrok.set_auth_token(NGROK_TOKEN)

Requirement already satisfied: flask in /usr/local/lib/python3.10/dist-packages (2.2.5)
Requirement already satisfied: Werkzeug>=2.2.2 in /usr/local/lib/python3.10/dist-packages (from flask) (3.0.2)
Requirement already satisfied: Jinja2>=3.0 in /usr/local/lib/python3.10/dist-packages (from flask) (3.1.3)
Requirement already satisfied: itsdangerous>=2.0 in /usr/local/lib/python3.10/dist-packages (from flask) (2.1.2)
Requirement already satisfied: click>=8.0 in /usr/local/lib/python3.10/dist-packages (from flask) (8.1.7)
Requirement already satisfied: MarkupSafe>=2.0 in /usr/local/lib/python3.10/dist-packages (from Jinja2>=3.0->flask) (2.1.5)
Requirement already satisfied: pyngrok in /usr/local/lib/python3.10/dist-packages (from Jinja2>=3.0->flask) (7.1.6)
Requirement already satisfied: PyYAML>=5.1 in /usr/local/lib/python3.10/dist-packages (from pyngrok) (6.0.1)

[3] from google.colab import drive
drive.mount('/content/drive')

Mounted at /content/drive

[4] !cp '/content/drive/MyDrive/Module 3' -r '/content/'
  
```

The bottom status bar indicates "0s completed at 19:32".

Fig. B.1: Importing Required Libraries

The screenshot shows the same Google Colab notebook with the following code cell:

```

from flask import Flask, render_template, jsonify, redirect, url_for, request
import json
import utils
import random
from pyngrok import ngrok

app = Flask(__name__)

global location
global parking_spots
global map_html

with open("details.json", "r") as jf:
    data = json.load(jf)
    users = data

@app.route('/', methods=['GET', 'POST'])
def login():
    if request.method == 'POST':
        email = request.form['email']
        password = request.form['password']

        print('user'+email+ "password" +password )
        if email in users.keys() and users[email]==password:
            return redirect(url_for('home'))

    return render_template('Login.html')
  
```

The bottom status bar indicates "0s completed at 19:32".

Fig. B.2: Pre-processing the Modules

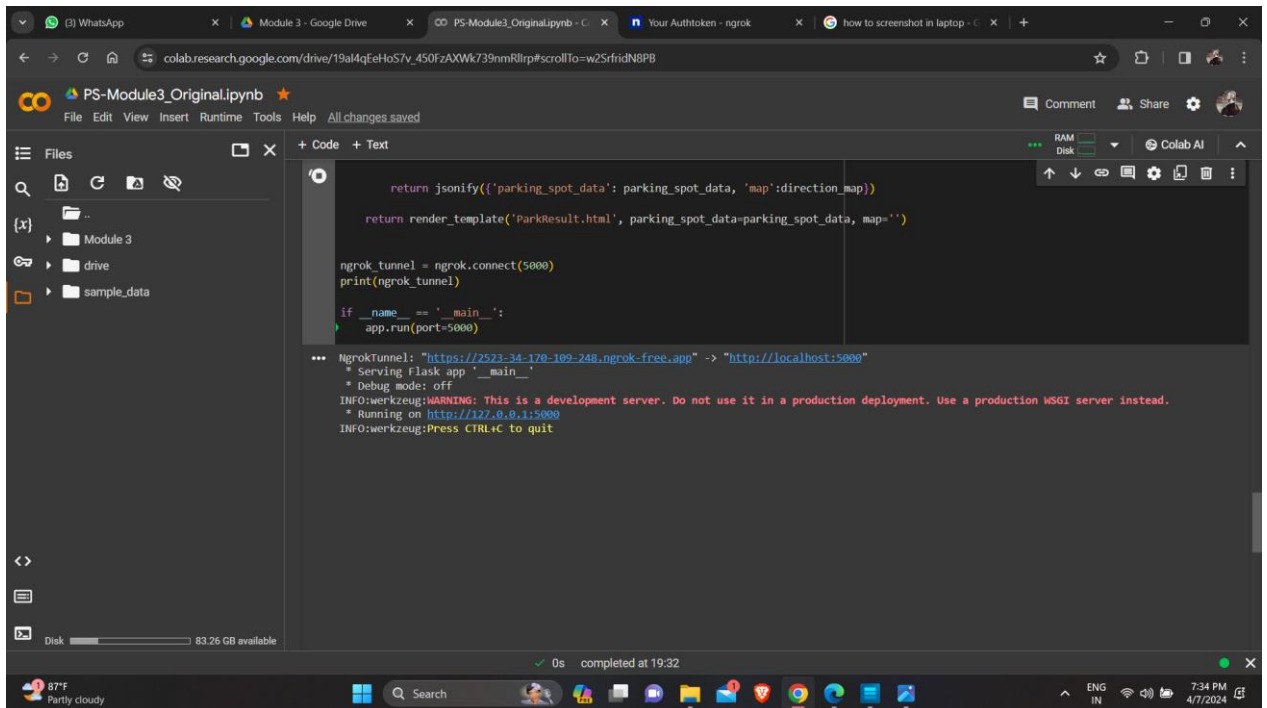


Fig. B.3: Here the local host link will show

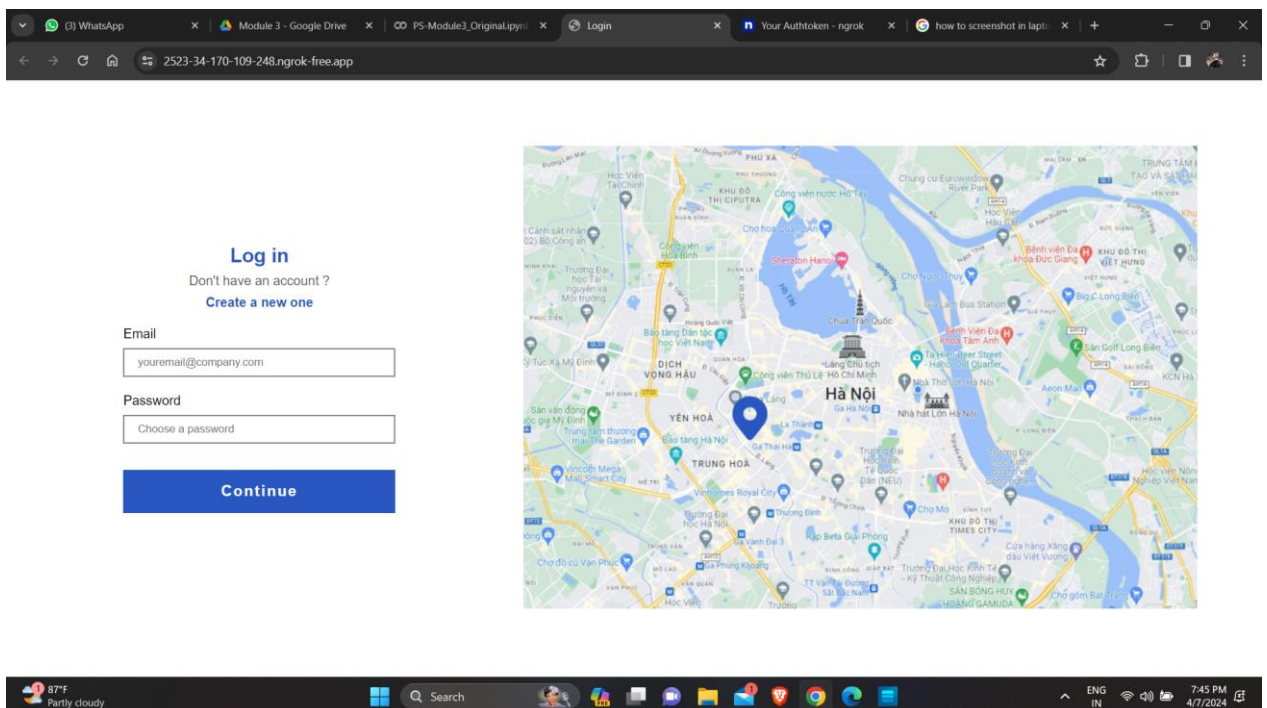


Fig. B.4: The main page

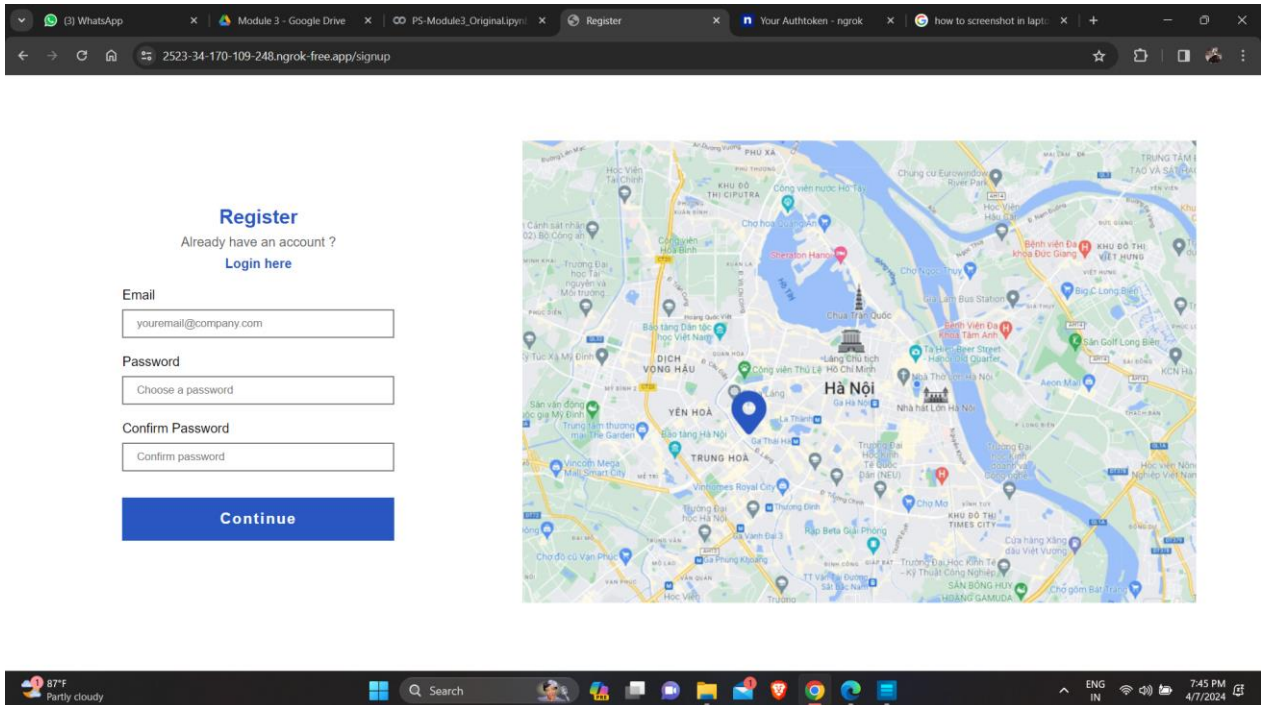


Fig. B.5: Login Page

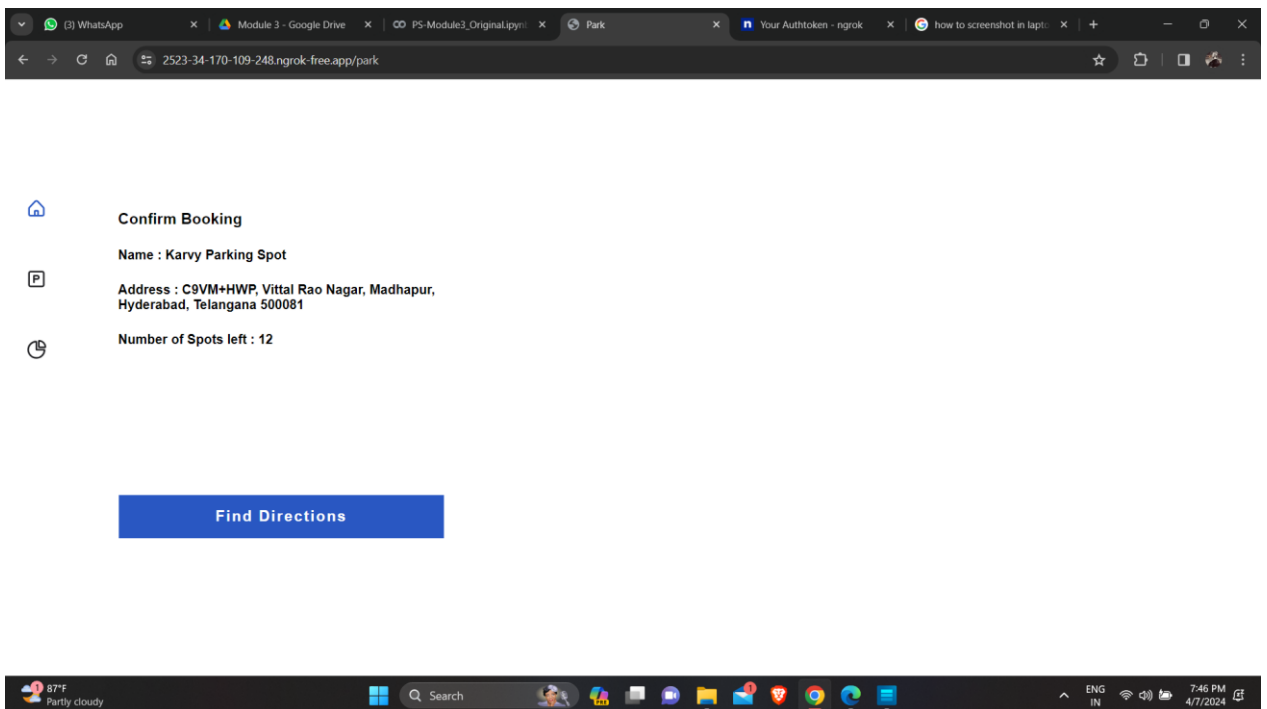


Fig. B.6: Output