

Ex. No.: 12

Date:

MITM ATTACK WITH ETTERCAP

Aim:

To initiate a MITM attack using ICMP redirect with Ettercap tool.

Algorithm:



- Install ettercap if not done already using
the command-dnf install ettercap
- Open etter.conf file and change the values of ec_uid and ec_gid to zero from default.
vi /etc/ettercap/etter.conf
- Next start ettercap in
GTK ettercap -G
- Click sniff, followed by unified sniffing.
- Select the interface connected to the network.
- Next ettercap should load into attack mode by clicking Hosts followed by Scan for Hosts
- Click Host List and choose the IP address for ICMP redirect
- Now all traffic to that particular IP address is redirected to some other IP address.
- Click MITM and followed by Stop to close the attack.



Output:

```
[root@localhost security lab]# dnf install ettercap
```

```
[root@localhost security lab]# vi /etc/ettercap/etter.conf
```

```
[root@localhost security lab]# ettercap -G
```

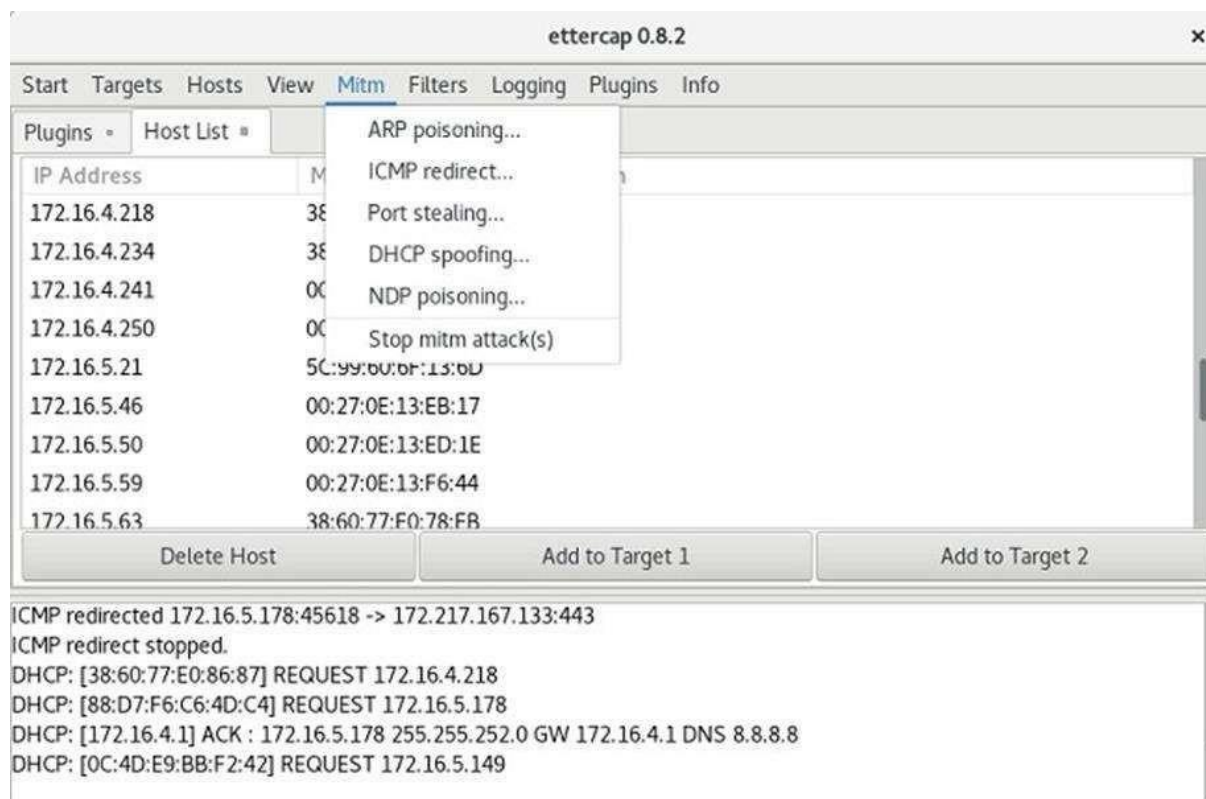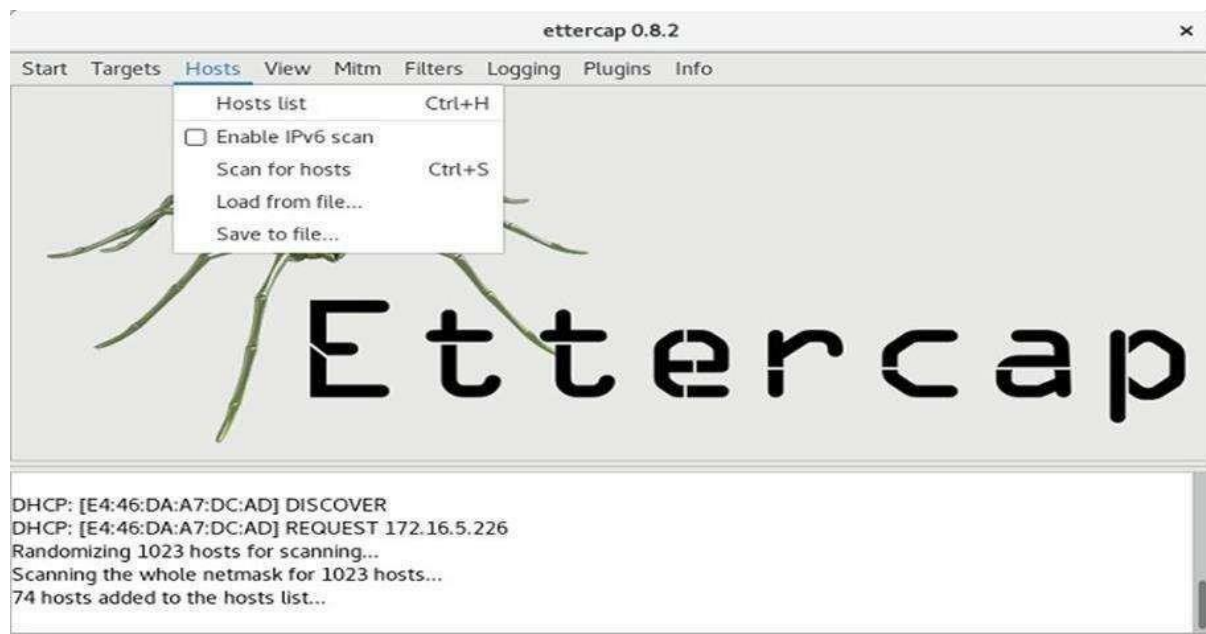

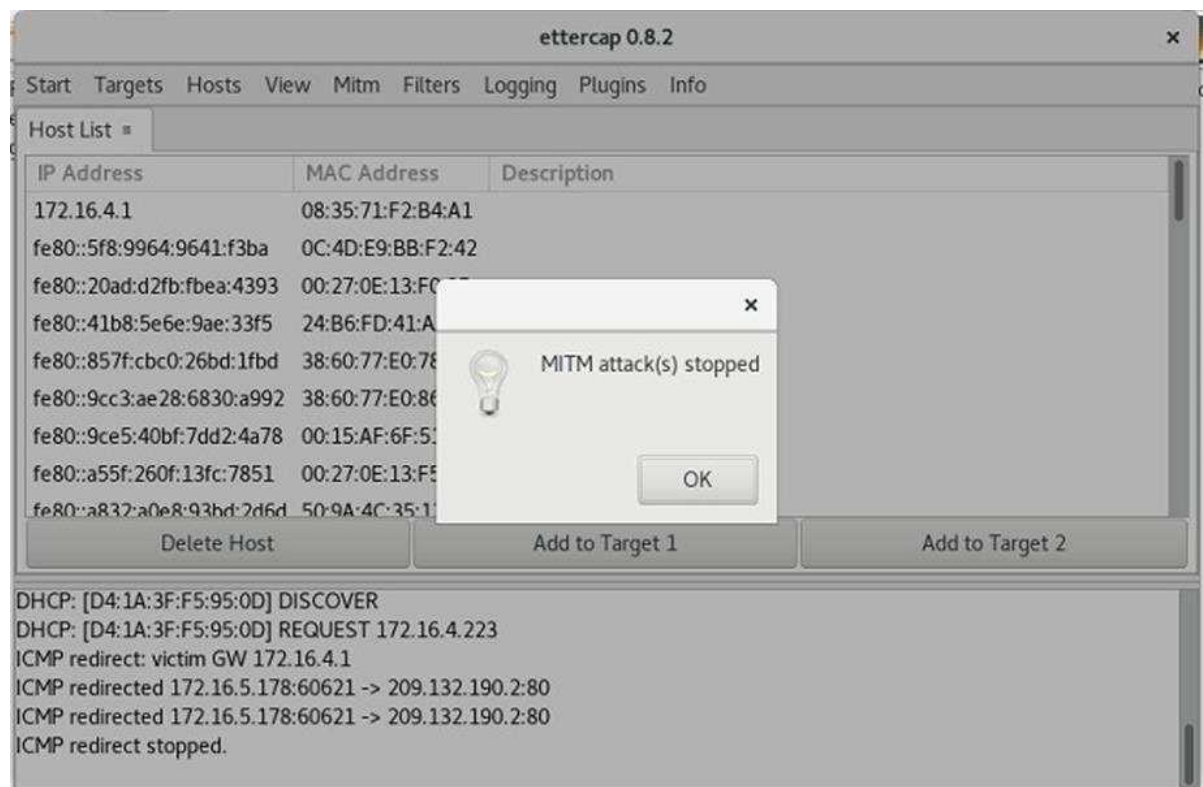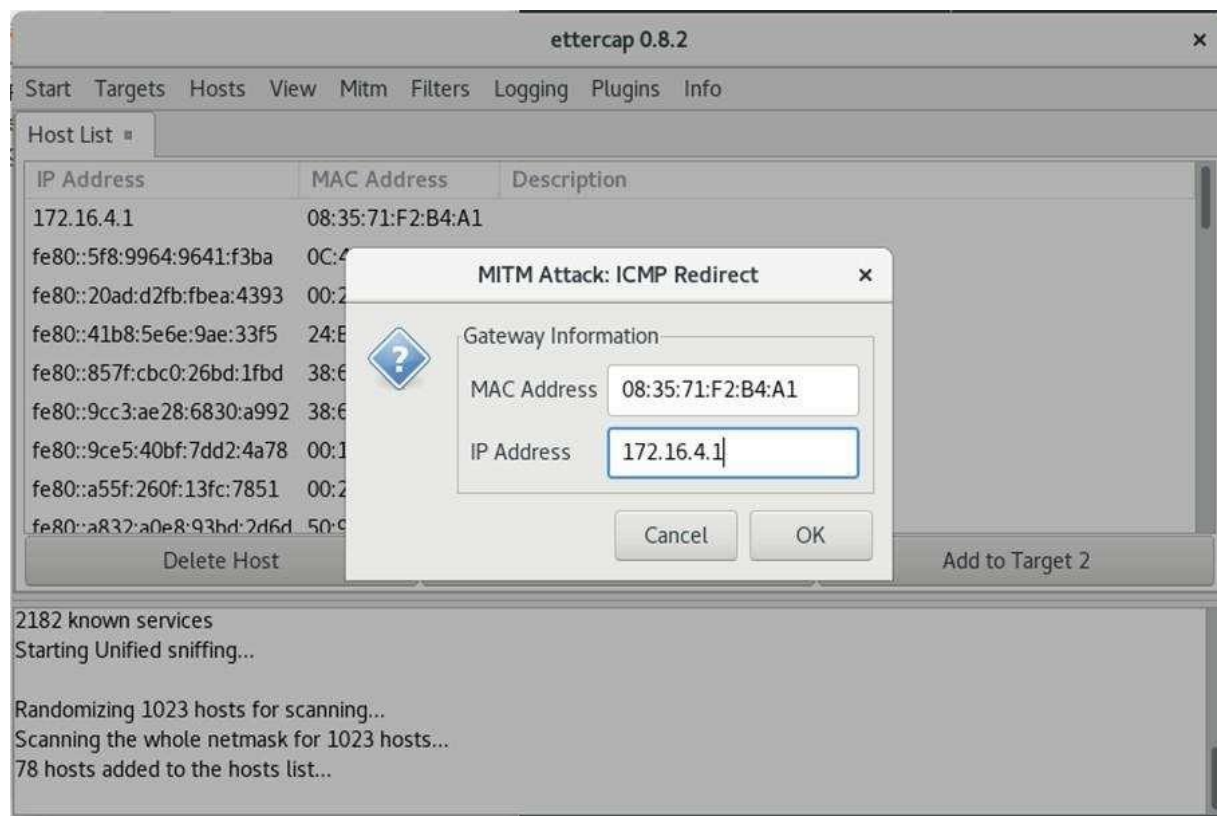

Result: