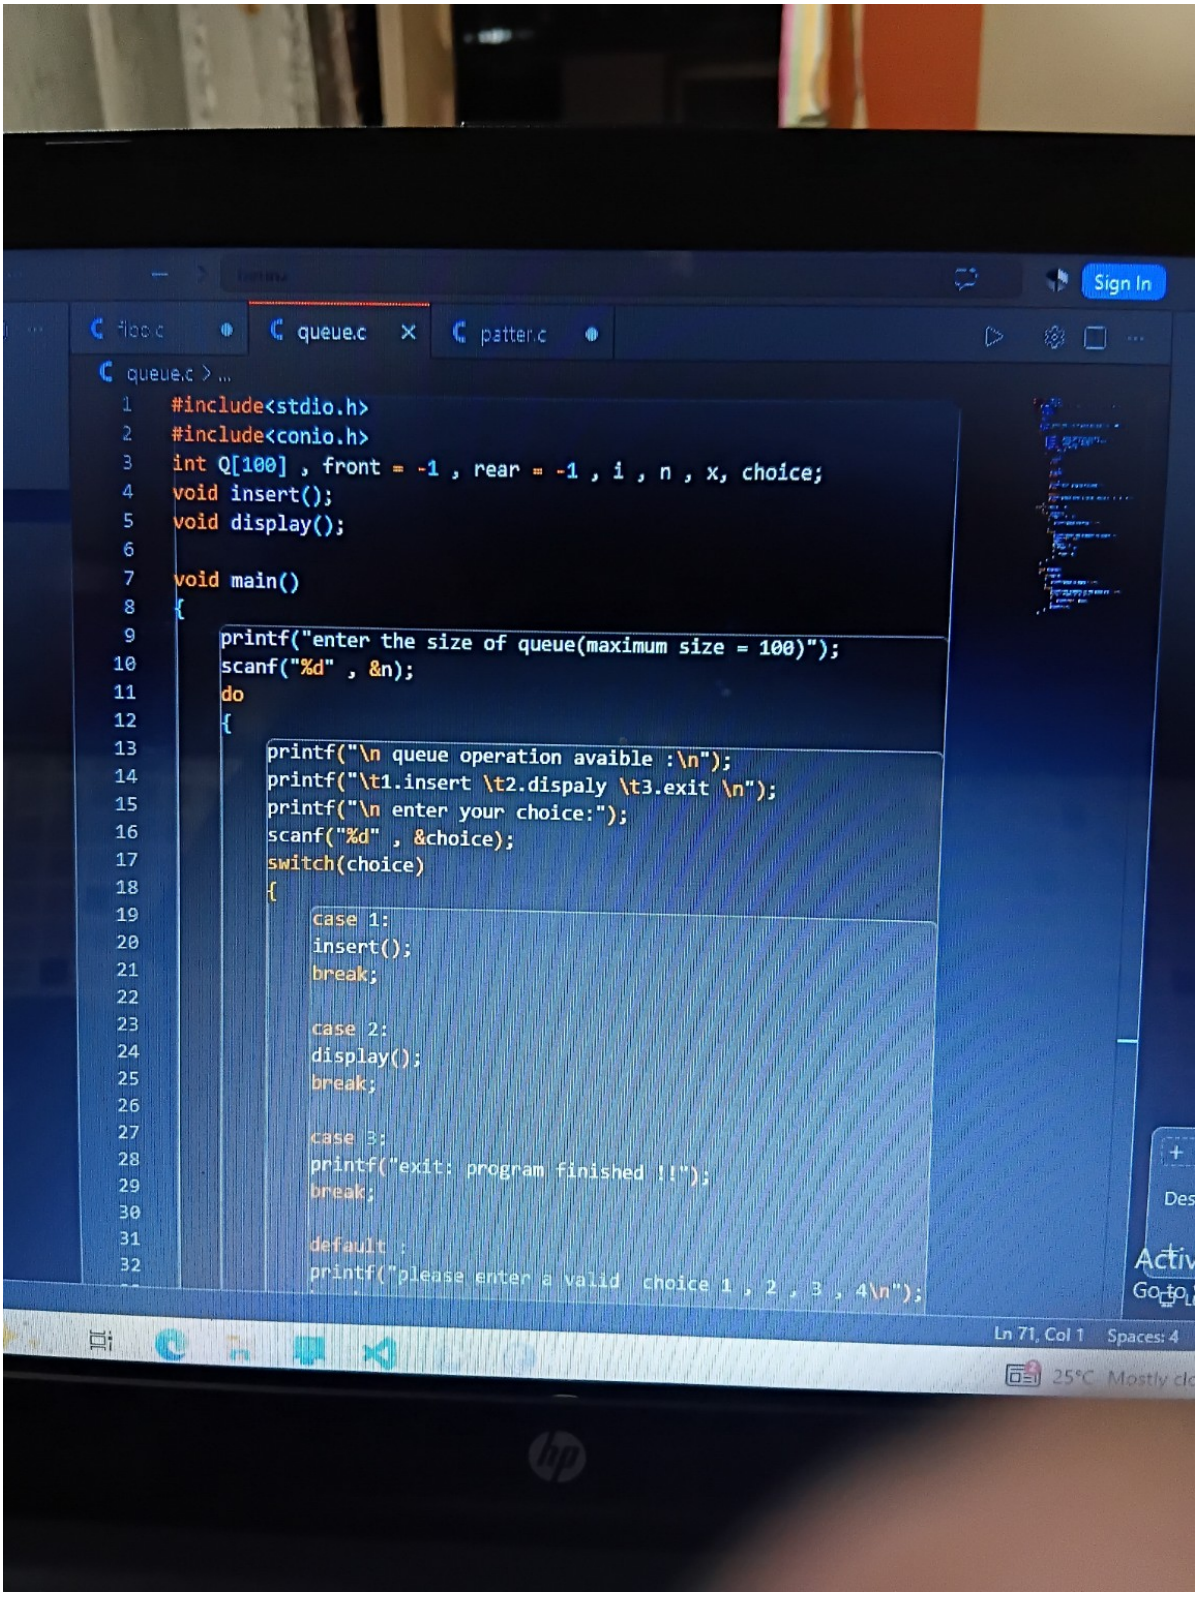
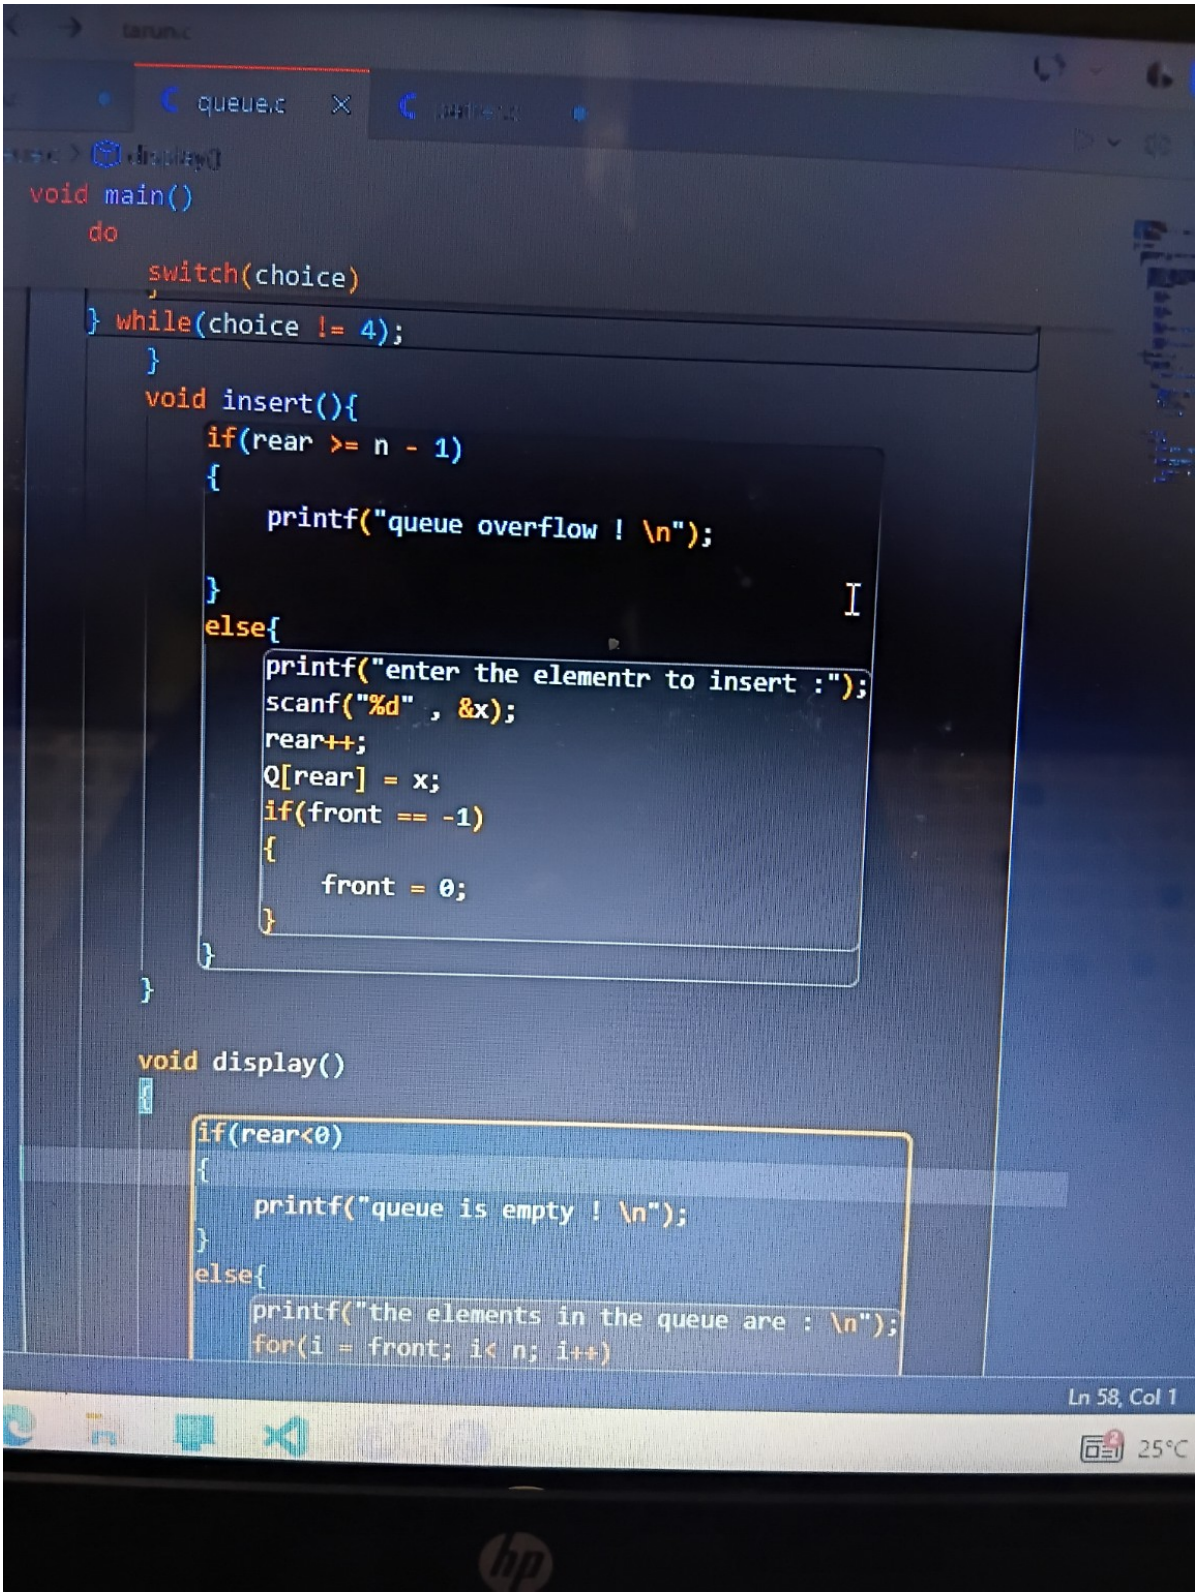
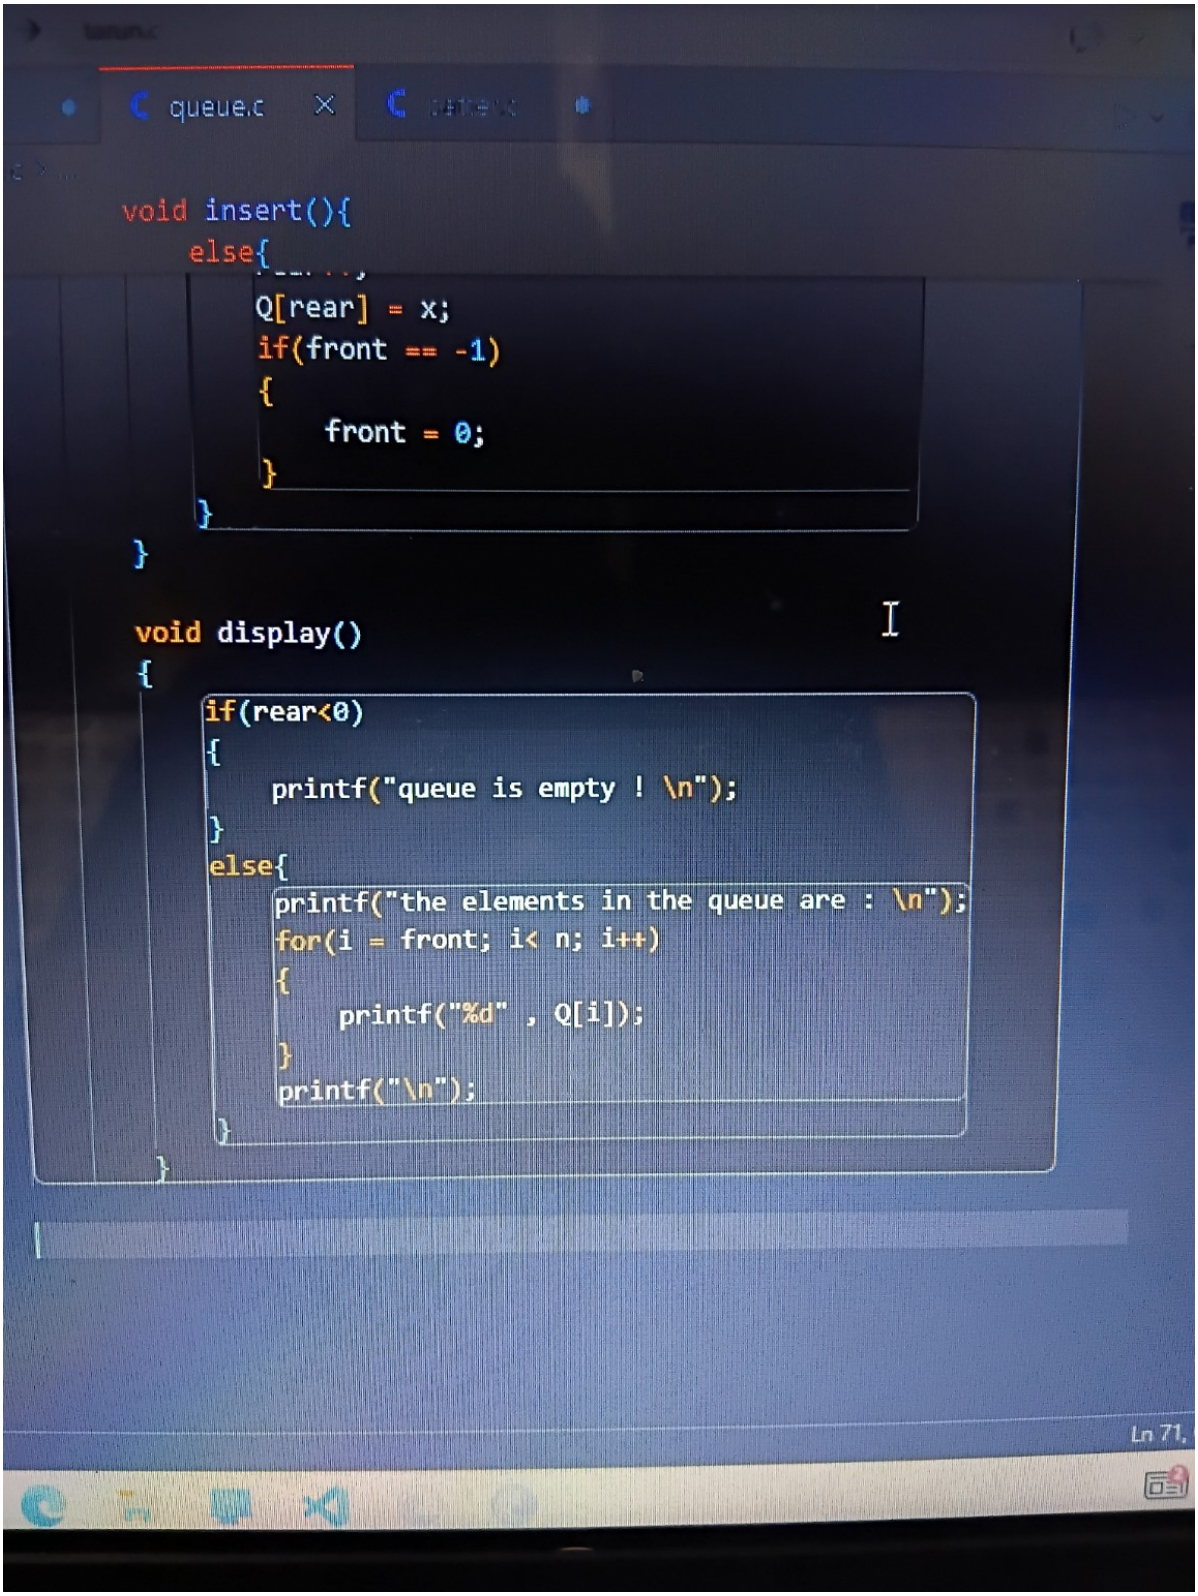
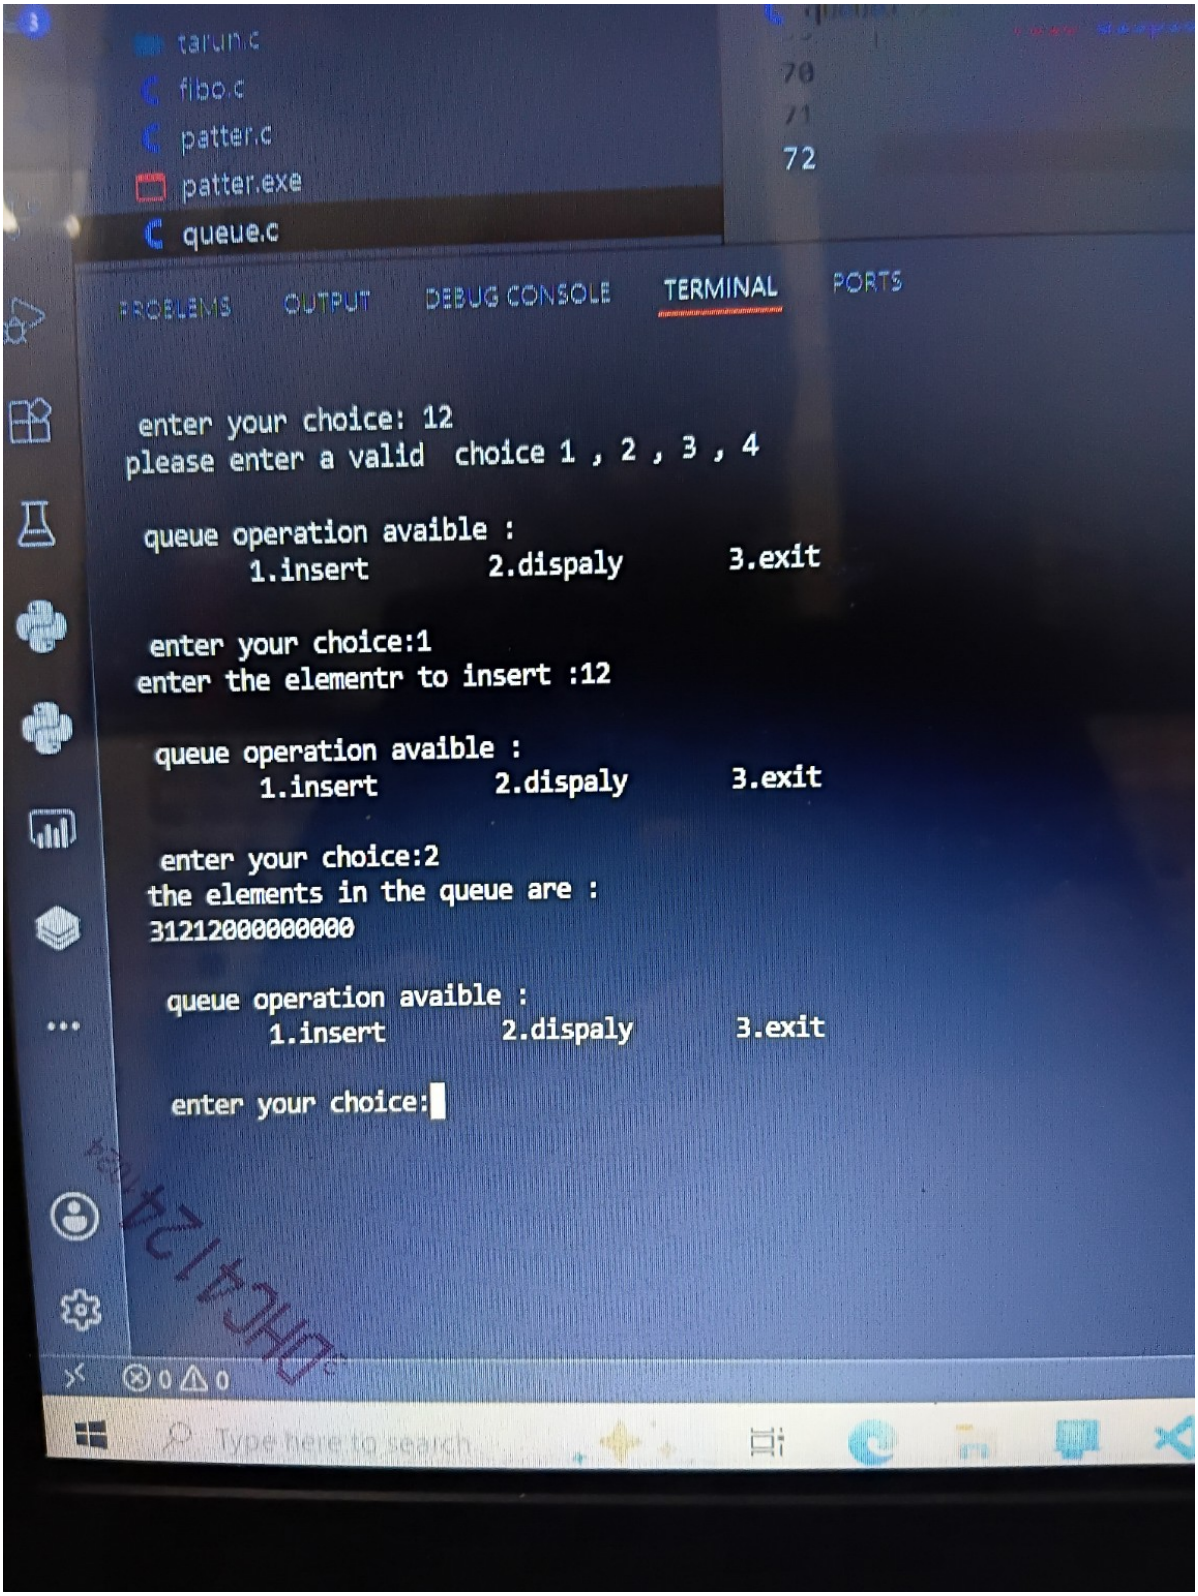

Sign In
queue.c
patter.c
queue.c > ...
#include<stdio.h>
#include<conio.h>
int Q[100] , front = -1 , rear = -1 , i , n , x, choice;
void insert();
void display();
void main()
{
printf("enter the size of queue(maximum size = 100)");
scanf("%d" , &n);
do
{
printf("\n queue operation avaible :\n");
printf("\t1.insert \t2.dispaly \t3.exit \n");
printf("\n enter your choice:");
scanf("%d" , &choice);
switch(choice)
{
case 1:
insert();
break;
case 2:
display();
break;
case 3:
printf("exit: program finished !!");
break;
default :
printf("please enter a valid choice 1 , 2 , 3 , 4\n");
Ln 71, Col 1
Spaces: 4
25°C


queue.c
void main()
do
switch(choice)
} while(choice != 4);
}
void insert(){
if(rear >= n - 1)
{
printf("queue overflow ! \n");
}
else{
printf("enter the elementr to insert :");
scanf("%d" , &x);
rear++;
Q[rear] = x;
if(front == -1)
{
front = 0;
}
}
}
void display()
{
if(rear<0)
{
printf("queue is empty ! \n");
}
else{
printf("the elements in the queue are : \n");
for(i = front; i< n; i++)
Ln 58, Col 1
25°C


queue.c
void insert(){
else{
Q[rear] = x;
if(front == -1)
{
front = 0;
}
}
}
void display()
{
if(rear<0)
{
printf("queue is empty ! \n");
}
else{
printf("the elements in the queue are : \n");
for(i = front; i< n; i++)
{
printf("%d" , Q[i]);
}
printf("\n");
}
}
Ln 71,


tarun.c
fibo.c
patter.c
patter.exe
queue.c
70
71
72
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
PORTS
enter your choice: 12
please enter a valid choice 1 , 2 , 3 , 4
queue operation avaible :
1.insert 2.dispaly 3.exit
enter your choice:1
enter the elementr to insert :12
queue operation avaible :
1.insert 2.dispaly 3.exit
enter your choice:2
the elements in the queue are :
31212000000000
queue operation avaible :
1.insert 2.dispaly 3.exit
enter your choice:
Type here to search