
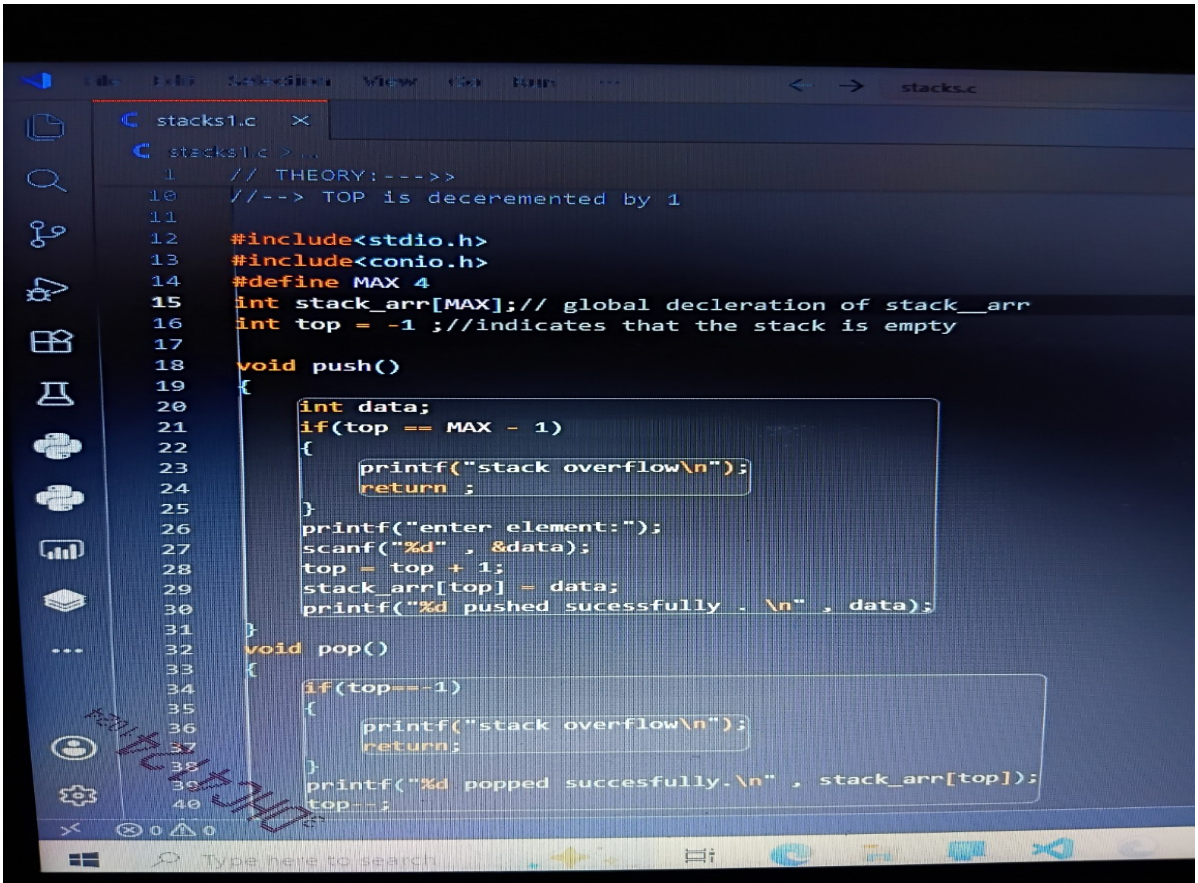


```c
// THEORY:--->>
//--> TOP is deceremented by 1

#include<stdio.h>
#include<conio.h>
#define MAX 4
int stack_arr[MAX];// global decleration of stack__arr
int top = -1 ;//indicates that the stack is empty


void push()
{
    int data;
    if(top == MAX - 1)
    {
        printf("stack overflow\n");
        return ;
    }
    printf("enter element:");
    scanf("%d" , &data);
    top = top + 1;
    stack_arr[top] = data;
    printf("%d pushed sucessfully . \n" , data);
}
void pop()
{
    if(top==-1)
    {
        printf("stack overflow\n");
        return;
    }
    printf("%d popped succesfully.\n" , stack_arr[top]);
    top--;
```

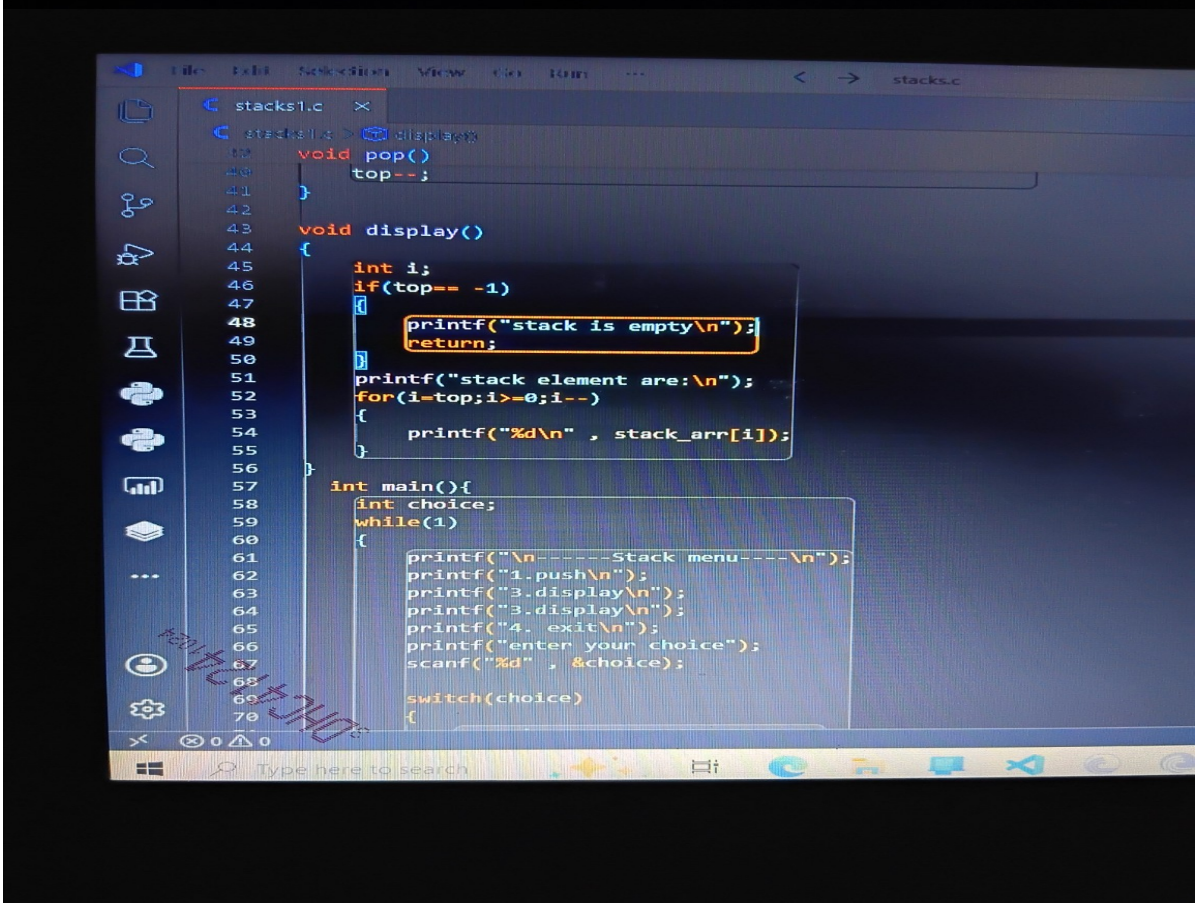

```c
void pop()
    top--;
}

void display()
{
    int i;
    if(top== -1)
    {
        printf("stack is empty\n");
        return;
    }
    printf("stack element are:\n");
    for(i=top;i>=0;i--)
    {
        printf("%d\n" , stack_arr[i]);
    }
}
 int main(){
    int choice;
    while(1)
    {
        printf("\n------Stack menu----\n");
        printf("1.push\n");
        printf("3.display\n");
        printf("3.display\n");
        printf("4. exit\n");
        printf("enter your choice");
        scanf("%d" , &choice);

        switch(choice)
        {
```

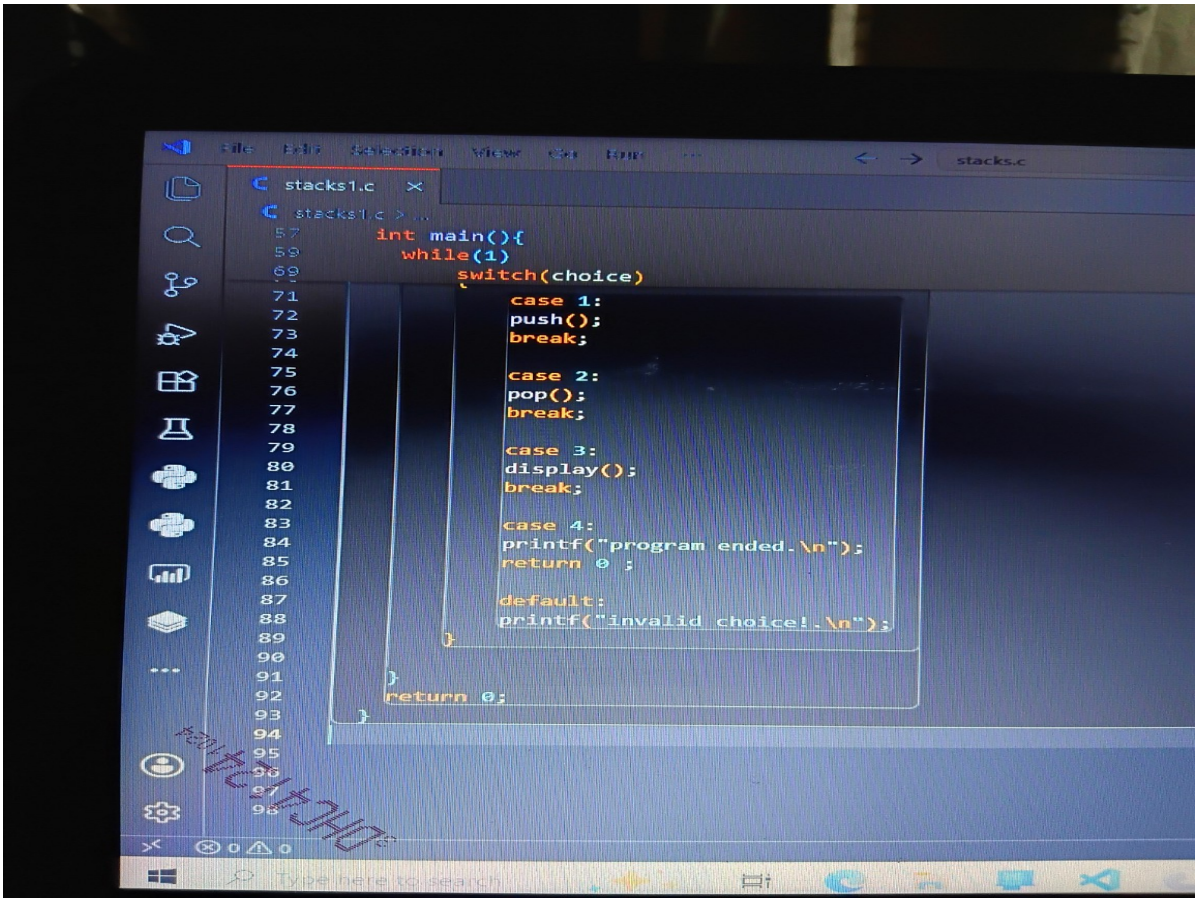
stacks1.c
stacks.c
int main(){
while(1)
switch(choice)
case 1:
push();
break;
case 2:
pop();
break;
case 3:
display();
break;
case 4:
printf("program ended.\n");
return 0 ;
default:
printf("invalid choice!.\n");
}
}
return 0;
}