Git Vs Github

Date
Page

Git: (Version control System)

→ Consider, you are creating a application with many updates and Versions. If there are 3 versions and third version got some error. to revert back to 2nd version of app we need to save the versions at some remote server so Here Git is one kind of VCS.

→ Remote Repository: The project folder is some where saved in remote location. (folder) in a laman language.

Github: It is one example of remote repository hosting service (RRHS)
Other: Bitbucket, Codebase, SourceForge, Amazon AWS code commit, GitLab, Microsoft Azure Devops are some examples of RRHS.

Why Git? It is free and easy to use.

→ Local Repository: The project where the user develops in local system.
→ your own repository (project folder)

Scanned by CamScanner

→ working directory: The repository contains many directories, the currently working directory (where you are making changes in files is called working directory).

To open cmd in file manager:

path > cmd ↵ → (cmd opened)


* → git init ↵ (Here .git file is created and you have initialized the git here.)

Untracked files: The files where git not tracked yet is called working directory. To see this we need to enter below command

* git status ↵

Stagging Area: You cannot commit single file at a time you need multiple so to save temporary needed file you use stagging area.

Scanned by CamScanner

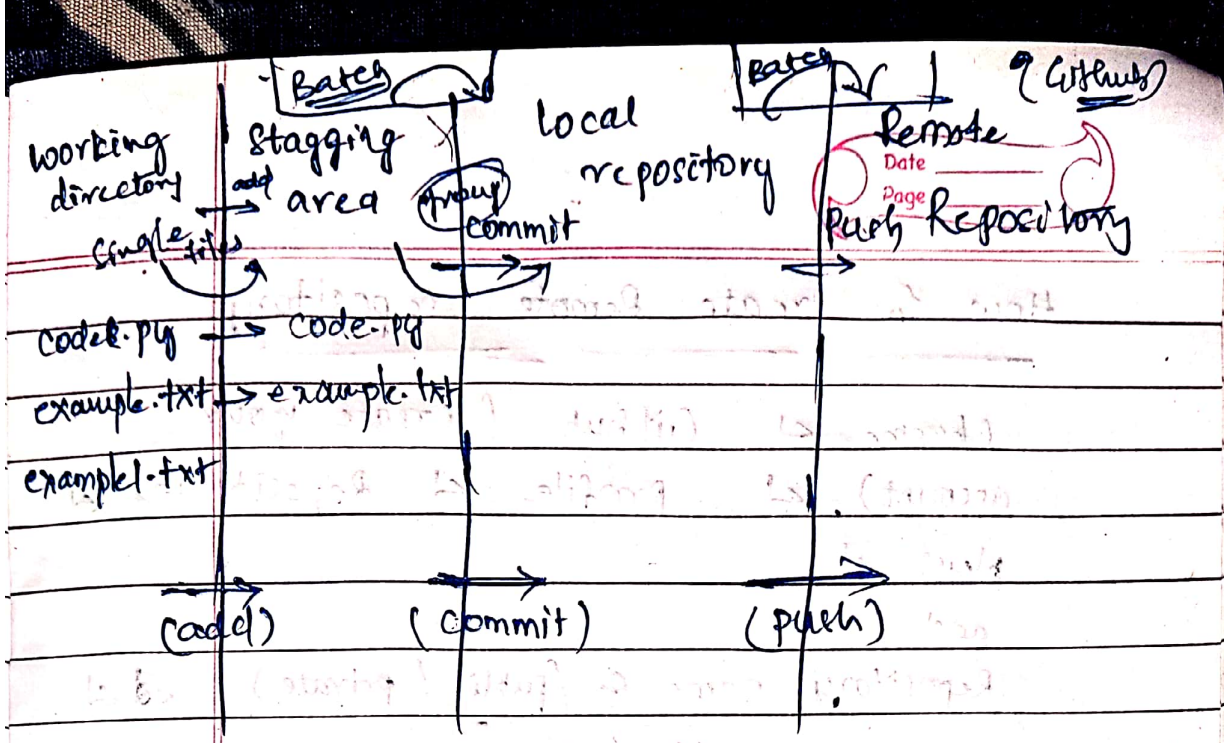

To add files to Stagging Area:

→ git add <filename> # To add specific files

→ git add . # to add all files in folder

To commit files to local repository:

git commit -m "your comment here"

To push files to the remote repository

git push ?

Now we need to create a remote repository to save all the code files to let's learn how to create a remote repository

Scanned by CamScanner

How to Create Remote repository:

Chrome ↵ Github (Create your account) ↵ profile ↵ Repositories ↵ New ↵

add

Repository name & (public / private) ↵

Create repository ↵

Now we connect the VCS to hosting service:- (in cmd)

git remote add origin https://github.com/ etc.

git status

git branch # gives your branch name. to see which branch you are in ?

git push -u origin master/main/ other

Branches:


There are different branches we deploy / redeploy the code from main / master branch

Scanned by CamScanner

Repos — main

Date
Page

ABC organization has 10 developers every developer work on new branches after completing the work they raise a PR (pull request).

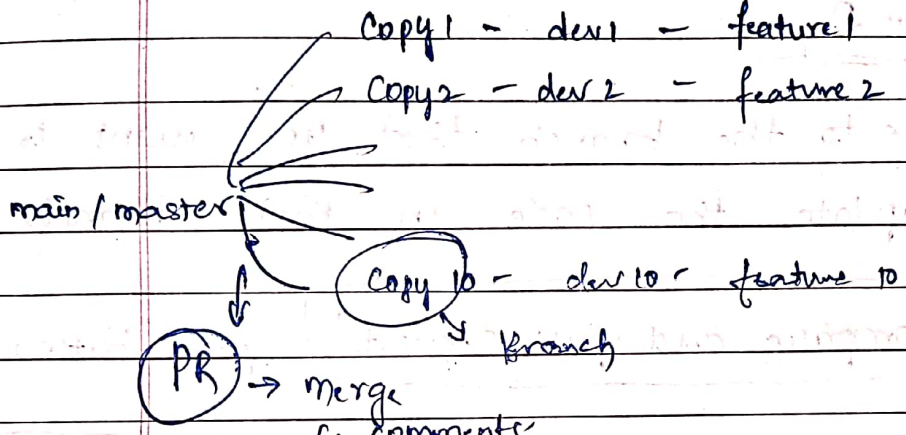

To create new branch:

checkout command: It is used to jump b/w the branches.

git checkout -b "copy 1".
↳ To create new branch if not exist

Now you have 2 branches.

1. main
2. copy 1.

Scanned by CamScanner

git status ↵
git add example1.txt ↵
git commit -m "commiting ex1 to copy1"
git push --set-upstream origin Copy1.

Pull Request:

Go to the branch that you want to update the code in main branch

"compare and pull request" green button.

give the comment create pull request

Fork:

If you want to edit some private folder / repo then we use this fork

here means access

Cloning:-

To get the code to Remote repository to local repository:-

1) go to code
2) copy https
3) terminal open after your folder creation.

Scanned by CamScanner

git clone "https path"

Conflicts:- / Merge Conflicts:-

deploy ← main/master → merged PR → at first Copy1 → hii

→ Copy2 → hi dev

now PR → creates the merge conflict

To resolve this we have merge conflicts.

git checkout master
git pull
git checkout dev-2

accept both changes

git status
git add ~~.~~ "." "."
git commit -m "after conflict"
git push -u origin master.

Scanned by CamScanner