# Module 5 Challenge

Start Assignment

**Due** Aug 4 by 11:59pm

Points 100

Submitting a text entry box or a website url

## **Background**

V. Isualize has given you and Omar a brand-new assignment. Using your Python skills and knowledge of Pandas, you'll create a summary DataFrame of the ride-sharing data by city type. Then, using Pandas and Matplotlib, you'll create a multiple-line graph that shows the total weekly fares for each city type. Finally, you'll submit a written report that summarizes how the data differs by city type and how those differences can be used by decision-makers at PyBer.

### **What You're Creating**

This new assignment consists of two technical analysis deliverables and a written report to present your results. You will submit the following:

- Deliverable 1: A ride-sharing summary DataFrame by city type
- Deliverable 2: A multiple-line chart of total fares for each city type
- Deliverable 3: A written report for the PyBer analysis (README.md)

### **Files**

Use the following link to download the Challenge starter code.

<u>Download challenge starter code</u> (https://2u-data-curriculum-team.s3.amazonaws.com/datavizonline/module\_5/PyBer\_Challenge\_starter\_code.ipynb)

### **Deliverable 1: A ride-sharing summary DataFrame by city type (35 points)**

#### **Deliverable 1 Instructions**

Using the Pandas <code>groupby()</code> function with the <code>count()</code> and <code>sum()</code> methods on PyBer DataFrame columns, get the total number of rides, total number of drivers, and the total fares for each city type. Then, calculate the average fare per ride and average fare per driver for each city type. Finally, add this data to a new DataFrame, then format the columns.



For this deliverable, you've already done the following in this module:

- Lesson 5.3.2: Use the (groupby()) function
- Lesson 5.3.2: Use the (count()) method
- Lesson 5.4.1: Format numbers and strings
- <u>Lesson 5.5.1:</u> Use the (sum()) method
- 1. Download the (PyBer\_Challenge\_starter\_code.ipynb) file into your PyBer\_Analysis folder and rename it (PyBer\_Challenge.ipynb).
- 2. Use the step-by-step instructions below to add code where indicated by the numbered comments in the starter code file.
- 3. In Step 1, use the <code>groupby()</code> function to create a Series of data that has the type of city as the index, then apply the <code>count()</code> method to the "ride\_id" column.
- 4. In Step 2, use the <code>groupby()</code> function to create a Series of data that has the type of city as the index, then apply the <code>sum()</code> method to the "driver\_count" column.
- 5. In Step 3, use the <code>groupby()</code> function to create a Series of data that has the type of city as the index, then apply the <code>sum()</code> method to the "fare" column.
- 6. In Step 4, calculate the average fare per ride by city type by dividing the sum of all the fares by the total rides.
- 7. In Step 5, calculate the average fare per driver by city type by dividing the sum of all the fares by the total drivers.
- 8. In Step 6, create a PyBer summary DataFrame with all the data gathered from Steps 1-5, using the column names shown below:.

|          | Total Rides | Total Drivers | Total Fares | Average Fare per Ride | Average Fare per Driver |
|----------|-------------|---------------|-------------|-----------------------|-------------------------|
| type     |             |               |             |                       |                         |
| Rural    | 125         | 78            | 4327.93     | 34.623440             | 55.486282               |
| Suburban | 625         | 490           | 19356.33    | 30.970128             | 39.502714               |
| Urban    | 1625        | 2405          | 39854.38    | 24.525772             | 16.571468               |
|          |             |               |             |                       |                         |

- 9. In Step 7, use the provided code snippet to remove the index name ("type") from the PyBer summary DataFrame.
- 10. In Step 8, format the columns of the Pyber summary DataFrame to look like this:

|          | Total Rides | <b>Total Drivers</b> | Total Fares | Average Fare per Ride | Average Fare per Driver |
|----------|-------------|----------------------|-------------|-----------------------|-------------------------|
| Rural    | 125         | 78                   | \$4,327.93  | \$34.62               | \$55.49                 |
| Suburban | 625         | 490                  | \$19,356.33 | \$30.97               | \$39.50                 |
| Urban    | 1,625       | 2,405                | \$39,854.38 | \$24.53               | \$16.57                 |
|          |             |                      |             |                       |                         |

### **Deliverable 1 Requirements**

You will earn a perfect score for Deliverable 1 by completing all requirements below:

- The total number of rides for each city type is retrieved. (5 pt)
- The total number of drivers for each city type is retrieved. (5 pt)
- The sum of the fares for each city type is retrieved. (5 pt)
- The average fare per ride for each city type is calculated. (5 pt)
- The average fare per driver for each city type is calculated. (5 pt)
- A PyBer summary DataFrame is created. (5 pt)
- The PyBer summary DataFrame is formatted as shown in the example. (5 pt)

## Deliverable 2: A multiple-line chart of total fares for each city type (45 points)

### **Deliverable 2 Instructions**

Using your Pandas skills and two new functions, (pivot()) and (resample()), create a multiple-line graph that shows the total fares for each week by city type.



#### **REWIND**

For this deliverable, you've already done the following in this module:

- Lesson 5.1.3: Create a line chart using the object-oriented interface method
- Lesson 5.1.4: Annotate charts
- Lesson 5.1.10: Graph a Pandas DataFrame
- <u>Lesson 5.3.2:</u> Use the (groupby()) function
- Lesson 5.5.1: Use the (sum()) method

Use the step-by-step instructions below to add code where indicated by the numbered comments in the starter code file:

- 1. In Step 1, create a new DataFrame with multiple indices using the <code>groupby()</code> function on the "type" and "date" columns of the <code>pyber\_data\_df</code> DataFrame, then apply the <code>sum()</code> method on the "fare" column to show the total fare amount for each date.
- 2. In Step 2, use the provided code snippet to reset the index. This is needed to use the pivot() function in the next step (Step 3).
- 3. In Step 3, use the pivot() function to convert the DataFrame from the previous step so that the index is the "date," each column is a city "type," and the values are the "fare."
  - After this step, you'll see that each cell has the total fare for the date and time, as shown in the following image.

Note: In cells where there is no fare to be summed for that row, the cell will be filled with NaNs.

| type                | Rural | Suburban | Urban |
|---------------------|-------|----------|-------|
| date                |       |          |       |
| 2019-01-01 00:08:16 | NaN   | NaN      | 37.91 |
| 2019-01-01 00:46:46 | NaN   | 47.74    | NaN   |
| 2019-01-01 02:07:24 | NaN   | 24.07    | NaN   |
| 2019-01-01 03:46:50 | NaN   | NaN      | 7.57  |
| 2019-01-01 05:23:21 | NaN   | NaN      | 10.75 |
| 2019-01-01 09:45:36 | 43.69 | NaN      | NaN   |
| 2019-01-01 12:32:48 | NaN   | 25.56    | NaN   |
| 2019-01-01 14:40:14 | NaN   | NaN      | 5.42  |
| 2019-01-01 14:42:25 | NaN   | NaN      | 12.31 |
| 2019-01-01 14:52:06 | NaN   | 31.15    | NaN   |

If you'd like a hint on how to create a pivot table from a DataFrame, that's totally okay. If not, that's great too. You can always revisit this later if you change your mind.

#### **SHOW HINT**

- 4. In Step 4, create a new DataFrame by using the loc method on the following date range: 2019-01-01 through 2019-04-28.
- 5. In Step 5, use the provided code snippet to reset the index of the DataFrame from the previous step (Step 4) to a datetime data type. This is necessary to use the resample() method in Step 7.
- 6. In Step 6, use the provided code snippet, (df.info()), to check that the "date" is a datetime data type.
- 7. In Step 7, create a new DataFrame by applying the <a href="resample()">(resample())</a> function to the DataFrame you modified in Step 5. Resample the data in weekly bins, then apply the <a href="sum()">(sum())</a> method to get the total fares for each week.

If you'd like a hint on how to create a pivot table from a DataFrame, that's totally okay. If not, that's great too. You can always revisit this later if you change your mind.

#### **SHOW HINT**


• After creating the resampled DataFrame in Step 7, confirm that your DataFrame looks like this:

| type       | Rural  | Suburban | Urban   |
|------------|--------|----------|---------|
| date       |        |          |         |
| 2019-01-06 | 187.92 | 721.60   | 1661.68 |
| 2019-01-13 | 67.65  | 1105.13  | 2050.43 |
| 2019-01-20 | 306.00 | 1218.20  | 1939.02 |
| 2019-01-27 | 179.69 | 1203.28  | 2129.51 |
| 2019-02-03 | 333.08 | 1042.79  | 2086.94 |
| 2019-02-10 | 115.80 | 974.34   | 2162.64 |
| 2019-02-17 | 95.82  | 1045.50  | 2235.07 |
| 2019-02-24 | 419.06 | 1412.74  | 2466.29 |
| 2019-03-03 | 175.14 | 858.46   | 2218.20 |
| 2019-03-10 | 303.94 | 925.27   | 2470.93 |

8. Finally, in Step 8, graph the resampled DataFrame from Step 7 using the object-oriented interface method and the <a href="df.plot()">df.plot()</a> method, as well as the Matplotlib "fivethirtyeight" graph style code snippet provided in the starter code.

Annotate the y-axis label and the title, then use the appropriate code to save the figure as <a href="PyBer\_fare\_summary.png">PyBer\_fare\_summary.png</a> in your "analysis" folder.

 Confirm that your multiple-line chart looks like the following image, where each week is a peak or dip in the line graphs.

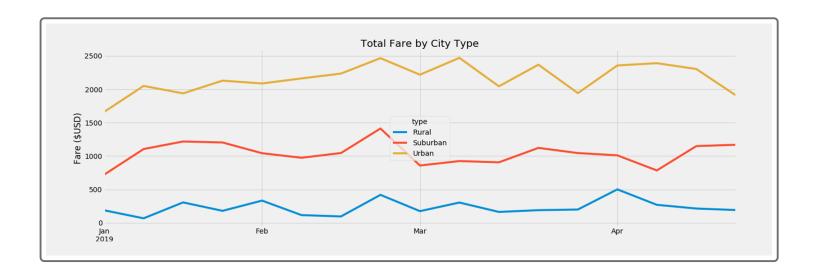

### **Deliverable 2 Requirements**

You will earn a perfect score for Deliverable 2 by completing all requirements below:

- A DataFrame was created using the <code>groupby()</code> function on the "type" and "date" columns, and the <code>sum()</code> method is applied on the "fare" column to show the total fare amount for each date and time. **(10 pt)**
- A DataFrame was created using the pivot() function where the index is the "date," the columns are the city "type," and the values are the "fare." (10 pt)
- A DataFrame was created using the loc method on the date range: 2019-01-01 through 2019-04-28. (5 pt)
- A DataFrame was created using the (resample()) function in weekly bins and shows the sum of the fares for each week.
   (10 pt)
- An annotated chart showing the total fares by city type is created and saved to the "analysis" folder. (10 pt)

# **Deliverable 3: A written report for the PyBer analysis (20 points)**

#### **Deliverable 3 Instructions**

Use your repository README file to write your analysis of how to address any disparities in the ride-sharing data among the city types.

The analysis should contain the following:

1. Overview of the analysis: Explain the purpose of the new analysis.

- 2. **Results:** Using images from the summary DataFrame and multiple-line chart, describe the differences in ride-sharing data among the different city types.
- 3. **Summary:** Based on the results, provide three business recommendations to the CEO for addressing any disparities among the city types.

### **Deliverable 3 Requirements**

#### **Structure, Organization, and Formatting (6 points)**

The written analysis has the following structure, organization, and formatting:

- There is a title, and there are multiple sections. (2 pt)
- Each section has a heading and subheading. (2 pt)
- · Links to images are working and displayed correctly. (2 pt)

#### **Analysis (14 points)**

The written analysis has the following:

- 1. Overview of the analysis:
  - The purpose of the new analysis is well defined. (3 pt)
- 2. Results:
  - There is a description of the differences in ride-sharing data among the different city types. Ride-sharing data
    include the total rides, total drivers, total fares, average fare per ride and driver, and total fare by city type. (7 pt)
- 3. Summary:
  - There is a statement summarizing three business recommendations to the CEO for addressing any disparities among the city types. (4 pt)

### **Submission**

Once you're ready to submit, make sure to check your work against the rubric to ensure you are meeting the requirements for this Challenge one final time. It's easy to overlook items when you're in the zone!

As a reminder, the deliverables for this Challenge are as follows:

- Deliverable 1: A ride-sharing summary DataFrame by city type.
- Deliverable 2: A multiple-line chart of total fares for each city type.
- Deliverable 3: A written report for the PyBer analysis (README.md).

Upload the following to your PyBer\_Analysis GitHub repository:

1. The PyBer Challenge.ipynb file.

- The results need to be kept populated in the PyBer\_Challenge.ipynb file. Do not clear the output from the PyBer Challenge.ipynb file before uploading to GitHub.
- 2. The "Resources" folder with the city\_data.csv and ride\_data.csv files.
- 3. The "analysis" folder with the PyBer\_fare\_summary.png.
- 4. An updated README.md that has your written analysis.

To submit your challenge assignment for grading in Bootcamp Spot, click Start Assignment, click the Website URL tab, then provide the URL of your PyBer\_Analysis GitHub repository, and then click Submit. Comments are disabled for graded submissions in BootCampSpot. If you have questions about your feedback, please notify your instructional staff or the Student Success Manager. If you would like to resubmit your work for an improved grade, you can use the **Re-Submit Assignment** button to upload new links. You may resubmit up to 3 times for a total of 4 submissions.

#### **IMPORTANT**

Once you receive feedback on your Challenge, make any suggested updates or adjustments to your work. Then, add this week's Challenge to your professional portfolio.

#### NOTE

You are allowed to miss up to two Challenge assignments and still earn your certificate. If you complete all Challenge assignments, your lowest two grades will be dropped. If you wish to skip this assignment, click Next, and move on to the next Module.

#### Module-5 Rubric

| Criteria  | Ratings  |   |  |   |                     |       |  |
|---|--|---|--|---|---------------------|-------|--|
| Deliverable 1: A ride- sharing summary DataFrame by city type | 35 to >31.0 pts Demonstrating Proficiency  √The total rides, total drivers, or sum of the fares for each city type are correctly retrieved. √The average fare per ride for each city type is correctly calculated.  √The average fare per driver for each city type is correctly calculated. √A summary DataFrame is created and all the columns are correct. √All FIVE columns of the summary DataFrame are correctly formatted | 31 to >27.0 pts Approaching Proficiency TWO of the THREE following data points are correctly retrieved: √The total rides, total drivers, or sum of the fares for each city type. AND: √Code is written to retrieve the remaining data points for each city type but with one minor error. √The average fare per ride OR per driver for each city type is correctly calculated, and the other is incorrect. √A summary DataFrame is created, but only THREE to FOUR of the columns are correct. √THREE to FOUR of the columns of the DataFrame are correctly formatted | 27 to >24.0 pts Developing Proficiency TWO of the THREE following data points are correctly retrieved: √The total rides, total drivers, or sum of the fares for each city type. AND: √Code is written to retrieve the remaining data points for each city type but with one minor error. √Code is written to calculate the average fare per ride for each city type but with one minor error. √Code is written to calculate the average fare per driver for each city type but with one minor error. √Code is written to calculate the average fare per driver for each city type but with one minor error. √A summary DataFrame is created, but only TWO to THREE of the columns are correct. √TWO to THREE of the columns of the DataFrame are correctly formatted | 24 to >0.0 pts Emerging  ONE of the THREE following data points are correctly retrieved: √The total rides, total drivers, or sum of the fares for each city type. AND: √Code is written to retrieve the other TWO data points for each city type but with minor errors. √Code is written to calculate the average fare per ride for each city type but with one minor error. √Code is written to calculate the average fare per driver for each city type but with one minor error. √ A summary DataFrame is created, but only ONE to TWO of the columns are correct. √ONE to TWO of the columns of the DataFrame are correctly formatted | 0 pts<br>Incomplete | 35 pt |  |

| Criteria                                       | Ratings                       |                             |                            |                            |                     |      |  |
|--|-------------------------------|-----------------------------|----------------------------|----------------------------|---------------------|------|--|
| Deliverable<br>2: A multiple-<br>line chart of | 45 to >42.0 pts Demonstrating | 42 to >39.0 pts Approaching | 39 to >34.0 pts Developing | 34 to >0.0 pts<br>Emerging | 0 pts<br>Incomplete |      |  |
| otal fares for                                 | Proficiency                   | Proficiency                 | Proficiency                | √A DataFrame               |                     |      |  |
| ach city                                       | √A DataFrame                  | √A DataFrame                | √A DataFrame               | was created                |                     |      |  |
| /pe  | was created                   | was created                 | was created                | using the                  |                     |      |  |
| r -  | using the                     | using the                   | using the                  | groupby()                  |                     |      |  |
|  | groupby()                     | groupby()                   | groupby()                  | function on the            |                     |      |  |
|  | function on the               | function on the             | function on the            | "type" and "date"          |                     |      |  |
|  | "type" and "date"             | "type" and "date"           | "type" and "date"          | columns, and the           |                     |      |  |
|  | columns, and the              | columns, and the            | columns, and the           | sum() method is            |                     |      |  |
|  | sum() method is               | sum() method is             | sum() method is            | applied on the             |                     |      |  |
|  | applied on the                | applied on the              | applied on the             | "fare" column.             |                     |      |  |
|  | "fare" column. √A             | "fare" column. √A           | "fare" column. √A          | √Code is written           |                     |      |  |
|  | DataFrame was                 | DataFrame was               | DataFrame was              | with a minor               |                     |      |  |
|  | created using the             | created using the           | created using the          | error to create a          |                     |      |  |
|  | pivot() function              | pivot() function            | pivot() function           | DataFrame                  |                     |      |  |
|  | where the index               | where the index             | where the index            | using the pivot()          |                     |      |  |
|  | is the "date", the            | is the "date", the          | is the "date", the         | function where             |                     |      |  |
|  | columns are the               | columns are the             | columns are the            | the index is the           |                     |      |  |
|  | city "type", and              | city "type", and            | city "type", and           | "date" and each            |                     |      |  |
|  | values are the                | values are the              | values are the             | column has the             |                     |      |  |
|  | "fare". √A                    | "fare". √A                  | "fare". √A                 | city "type". √A            |                     |      |  |
|  | DataFrame was                 | DataFrame was               | DataFrame was              | DataFrame was              |                     | 45 p |  |
|  | created using the             | created using the           | created using the          | created using              |                     |      |  |
|  | loc method on                 | loc method on               | loc method on the          | the loc method             |                     |      |  |
|  | the date range                | the date range              | date range                 | on the date                |                     |      |  |
|  | indicated √A                  | indicated. √A               | indicated. √Code           | range indicated.           |                     |      |  |
|  | DataFrame was                 | DataFrame was               | is written to              | √Code is written           |                     |      |  |
|  | created using the             | created using the           | create a                   | to create a                |                     |      |  |
|  | resample()                    | resample()                  | DataFrame using            | DataFrame                  |                     |      |  |
|  | function in                   | function in weekly          | the resample()             | using the                  |                     |      |  |
|  | weekly bins and               | bins and shows              | function in weekly         | resample()                 |                     |      |  |
|  | shows the sum of              | the sum of the              | bins, but the total        | function in                |                     |      |  |
|  | the fares for each            | fares for each              | fares aren't               | weekly bins, but           |                     |      |  |
|  | week. √An                     | week. √The                  | retrieved                  | the total fares            |                     |      |  |
|  | annotated chart               | graph may have              | correctly. √The            | aren't retrieved           |                     |      |  |
|  | showing the total             | multiple lines but          | graph may have             | correctly. √The            |                     |      |  |
|  | fares by city type            | not like the                | multiple lines but         | graph doesn't              |                     |      |  |
|  | is created and                | solution, but is            | not like the               | have multiple              |                     |      |  |
|  | saved.                        | annotated and               | solution, but is           | lines but is               |                     |      |  |
|  |                               | saved.                      | annotated and              | annotated and              |                     |      |  |
|  |                               |                             | saved.                     | saved.                     |                     |      |  |
|  |                               |                             |                            |                            |                     |      |  |
|  |                               |                             |                            |                            |                     |      |  |
|  |                               |                             |                            |                            |                     |      |  |

| Criteria   | Ratings   |   |   |  |                     |       |  |
|--|---|---|---|--|---------------------|-------|--|
| Deliverable 3: Structure, Organization, and Formatting | 6 to >5.0 pts Demonstrating Proficiency The written analysis has ALL of the following: √There is a title, and there are multiple sections. √Each section has a heading and subheading. √There are images which are formatted and displayed correctly.   | 5 to >4.0 pts Approaching Proficiency The written analysis has ALL of the following: √There is a title, and there are multiple sections. √Each section has a heading and subheading. √There are images which are formatted and displayed correctly with one or two minor errors.                          | 4 to >3.0 pts Developing Proficiency The written analysis has ALL of the following: √There is a title, and there are multiple sections. AND ONE of the following: √Each section may have a heading and subheading. √There are images which are formatted and displayed correctly with one or two minor errors | ALL of the following:  There is a title. There may be a subheading for a section.  There are no headings for each section,   | 0 pts<br>Incomplete | 6 pts |  |
| Deliverable<br>3: Analysis                             | 14 to >11.0 pts Demonstrating Proficiency  √The purpose is well defined.  √There is a description of the differences in the ride-sharing data for ALL SIX metrics by city type. √There is a statement summarizing THREE business recommendations addressing disparities among the city types. | 11 to >9.0 pts Approaching Proficiency  √The purpose is well defined.  √There is a description of the differences in the ride-sharing data for FOUR to FIVE of the SIX metrics by city type.  √There is a statement summarizing TWO business recommendations addressing disparities among the city types. | 9 to >8.0 pts Developing Proficiency  √The purpose is well defined.  √There is a description of the differences in the ride- sharing data for TWO to THREE of the SIX metrics by city type. √There is a statement summarizing ONE business recommendation addressing disparities among the city types.        | 8 to >0.0 pts Emerging  √The purpose is well defined.  √There is a description of the differences in the ride-sharing data for ONE to TWO of the SIX metrics by city type.  √The summary does not adequately address business recommendations addressing disparities among the city types. | 0 pts<br>Incomplete | 14 pt |  |

| Criteria | Ratings   | Pts      |
|----------|-----------|----------|
|          | Total Poi | nts: 100 |

© 2020 - 2022 Trilogy Education Services, a 2U, Inc. brand. All Rights Reserved.