

Zegowska szama SAD

This document contains all the technical documentation intended for developers regarding this projects class diagram, database, code documentation and project's structure

Tech stack

- Backend: PHP
- Frontend: Javascript + bootstrap
- Database: MySQL
- Hosting: external server

All technologies were imposed from the beginning by a third party.

System class architecture

- User - information about the currently logged in user
- Role - users role containing their permissions
- Settings - users settings
- Product - information about the product
- Order - Information about the order
- Item - what gets processed at the checkout (product data & quantity)

User

- string name
- string email
- integer id
- Role role
- Settings settings
- vector<integer> claimedOfferIds

Role

- string name
- set<enum> permissions (0 - see offers, 1 - manage orders, 2 - push announcements, 3 - manage roles)

Settings

- string theme

Product

- string name
- string picture
- string category
- integer id
- integer price (cents, price is READ-ONLY)
- integer discount (from 0% to 100% only)
- integer stock

Order

- UserMetadata user (who orders)
- integer id
- enum status (0 - pending, 1 - processing, 2 - completed, 3 - collected)
- vector<Item> contents
- vector<Offer> offers

Item

- Product item (includes the price of a single unit)
- integer quantity

Announcement

- integer id
- string title
- string content
- string createdAt


Offer

- integer id
- string name
- integer price
- vector<Item> contents

UserMetadata

- integer id
- string name
- string email

Class diagram (note: not updated!!!)

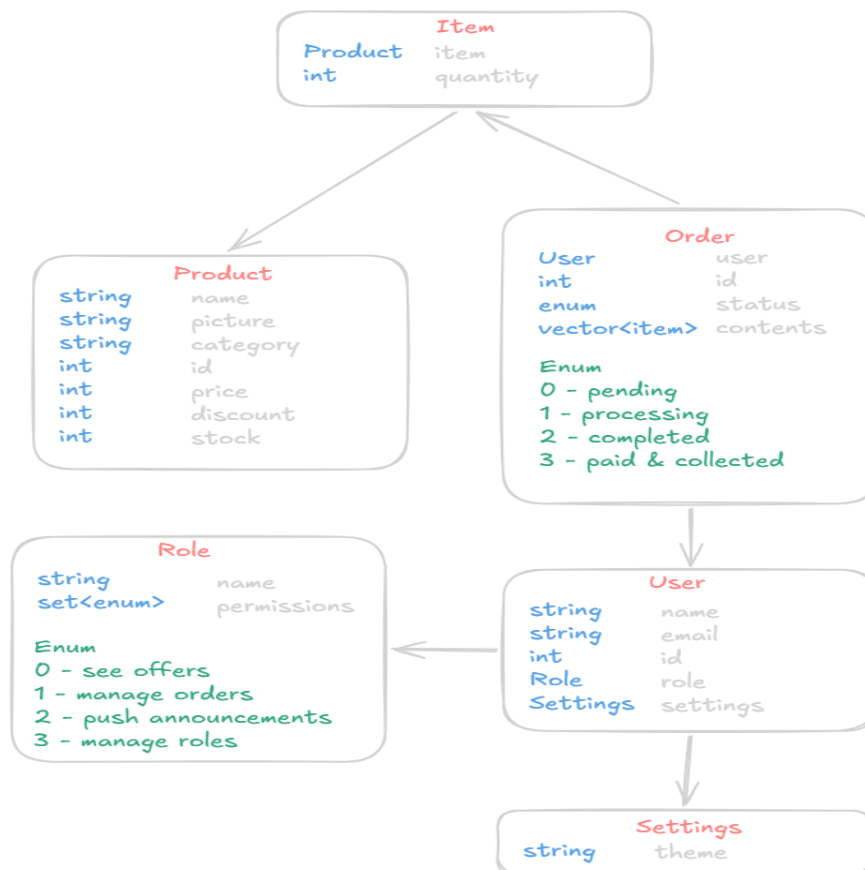

Database tables

- products - available products
- order_items - snapshot table containing unchanged data
- orders - created orders
- users - registered users
- settings - users personal settings
- roles - existing roles
- role_permissions - a table mapping permissions to roles
- permissions - list of permissions
- offers - stores the bundle metadata and its overall special price
- offer_products - the bridge table mapping which products (and how many) make up an offer
- user_claimed_offers - tracks which one-time offers a user has already redeemed
- order_offers - tracks which bundles were bought in which order, snapshotting the price just like order_items does.
- announcements - stores announcements for the platform

products

- integer, primary key, auto increment id
- string name
- string category
- string, unique picture

- integer price_cents (price_cents > 0)
- integer, allow nulls discount_percent (discount_percent BETWEEN 0 AND 100)
- integer stock (stock >= 0)

order_items

- integer, primary key, auto increment id
- integer, foreign key of orders, order_id (indexed)
- integer foreign key of products, product_id (indexed)
- integer quantity (quantity > 0)
- integer unit_price_snapshot (unit_price_snapshot > 0) (the single product price at the time of purchase)
- integer, allow nulls discount_percent_snapshot (the discount percent at the time of purchase)

orders

- integer, primary key, auto increment id
- integer, foreign key of users, user_id (indexed)
- integer status (status IN (0, 1, 2, 3))
- datetime created_at

users

- integer, primary key, auto increment id
- string name
- string password (indexed)
- string, unique email
- integer, foreign key of roles, role_id
- datetime created_at

settings

- integer, primary key, foreign key of users, user_id
- string theme

roles

- integer, primary key, auto increment id
- string name

role_permissions

- integer foreign key of roles, role_id
- integer foreign key of permissions, permission_id
- Primary key (role_id, permission_id)

permissions

- integer primary key, auto increment id
- string name

offers

- integer primary key, auto increment id
- string name
- integer price
- datetime created_at

offer_products

- integer foreign key of offers, offer_id (indexed)
- integer foreign key of products, product_id (indexed)
- integer quantity (quantity > 0)
- Primary key (offer_id, product_id)

user_claimed_offers

- integer foreign key of users, user_id (indexed)
- integer foreign key of offers offer_id (indexed)
- datetime claimed_at
- Primary key (user_id, offer_id)


order_offers

- integer primary key, auto increment id
- integer foreign key of orders, order_id (indexed)
- integer foreign key of offers, offer_id (indexed)
- integer quantity (quantity > 0)
- unit_price_snapshot (The price of the offer at the time of purchase)

announcements

- integer primary key, auto increment id
- string title
- string content
- datetime created_at

Database diagram (note: not updated!!!)

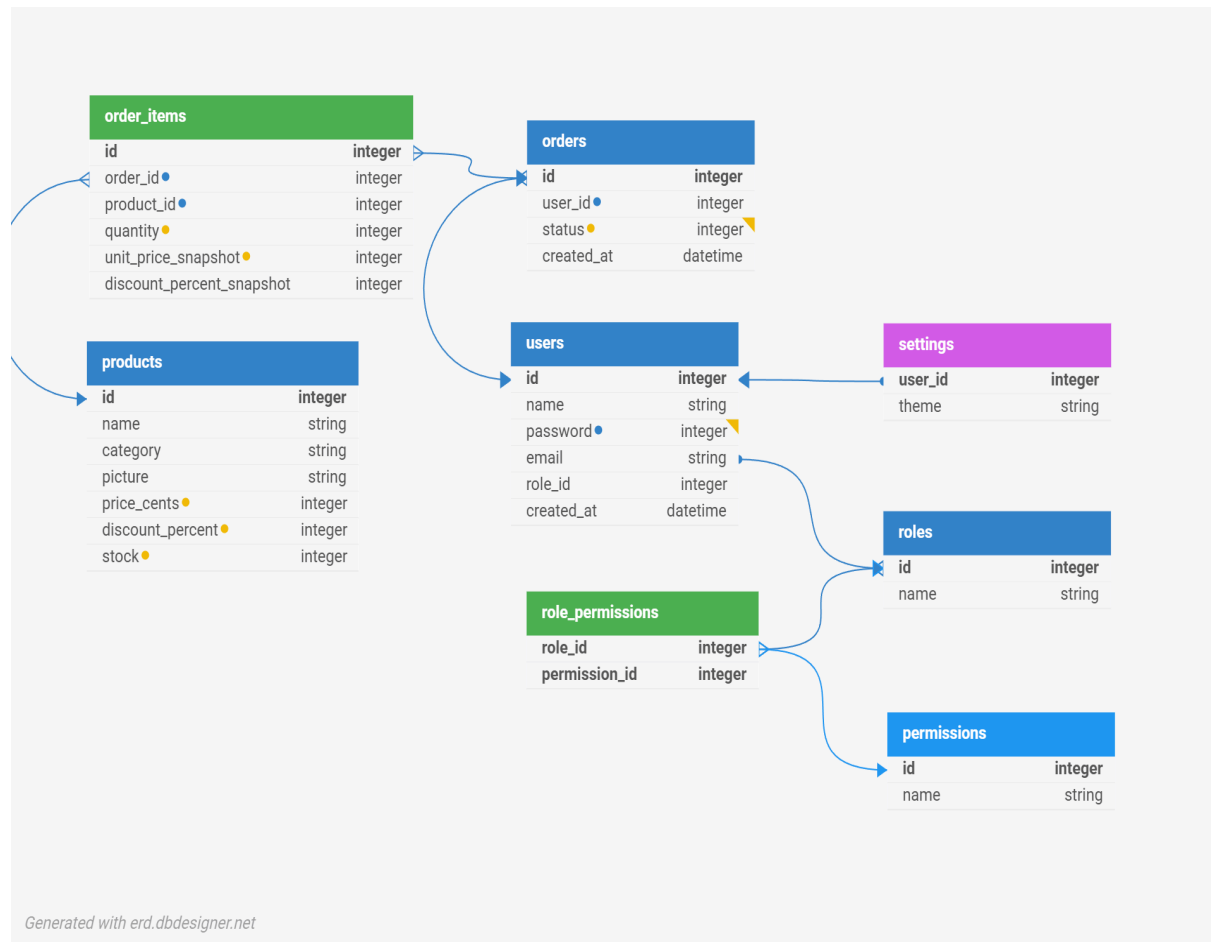

Database relations

- products $\longleftrightarrow$ orders - many to many
- users $\rightarrow$ orders - one to many
- settings — users - one to one
- users $\rightarrow$ roles - one to many
- roles $\longleftrightarrow$ permissions - many to many
- products $\longleftrightarrow$ offers - many to many
- users $\longleftrightarrow$ offers - many to many
- orders $\longleftrightarrow$ offers - many to many

Code documentation

unfinished [...]

Project structure

/project

- └─ README.md
- └─ CHANGELOG.md
- └─ LICENSE
- └─ .env.example
- └─ /docs (project's documentation)
- └─ /design (project's graphic design)
- └─ /src (project's code implementation)