


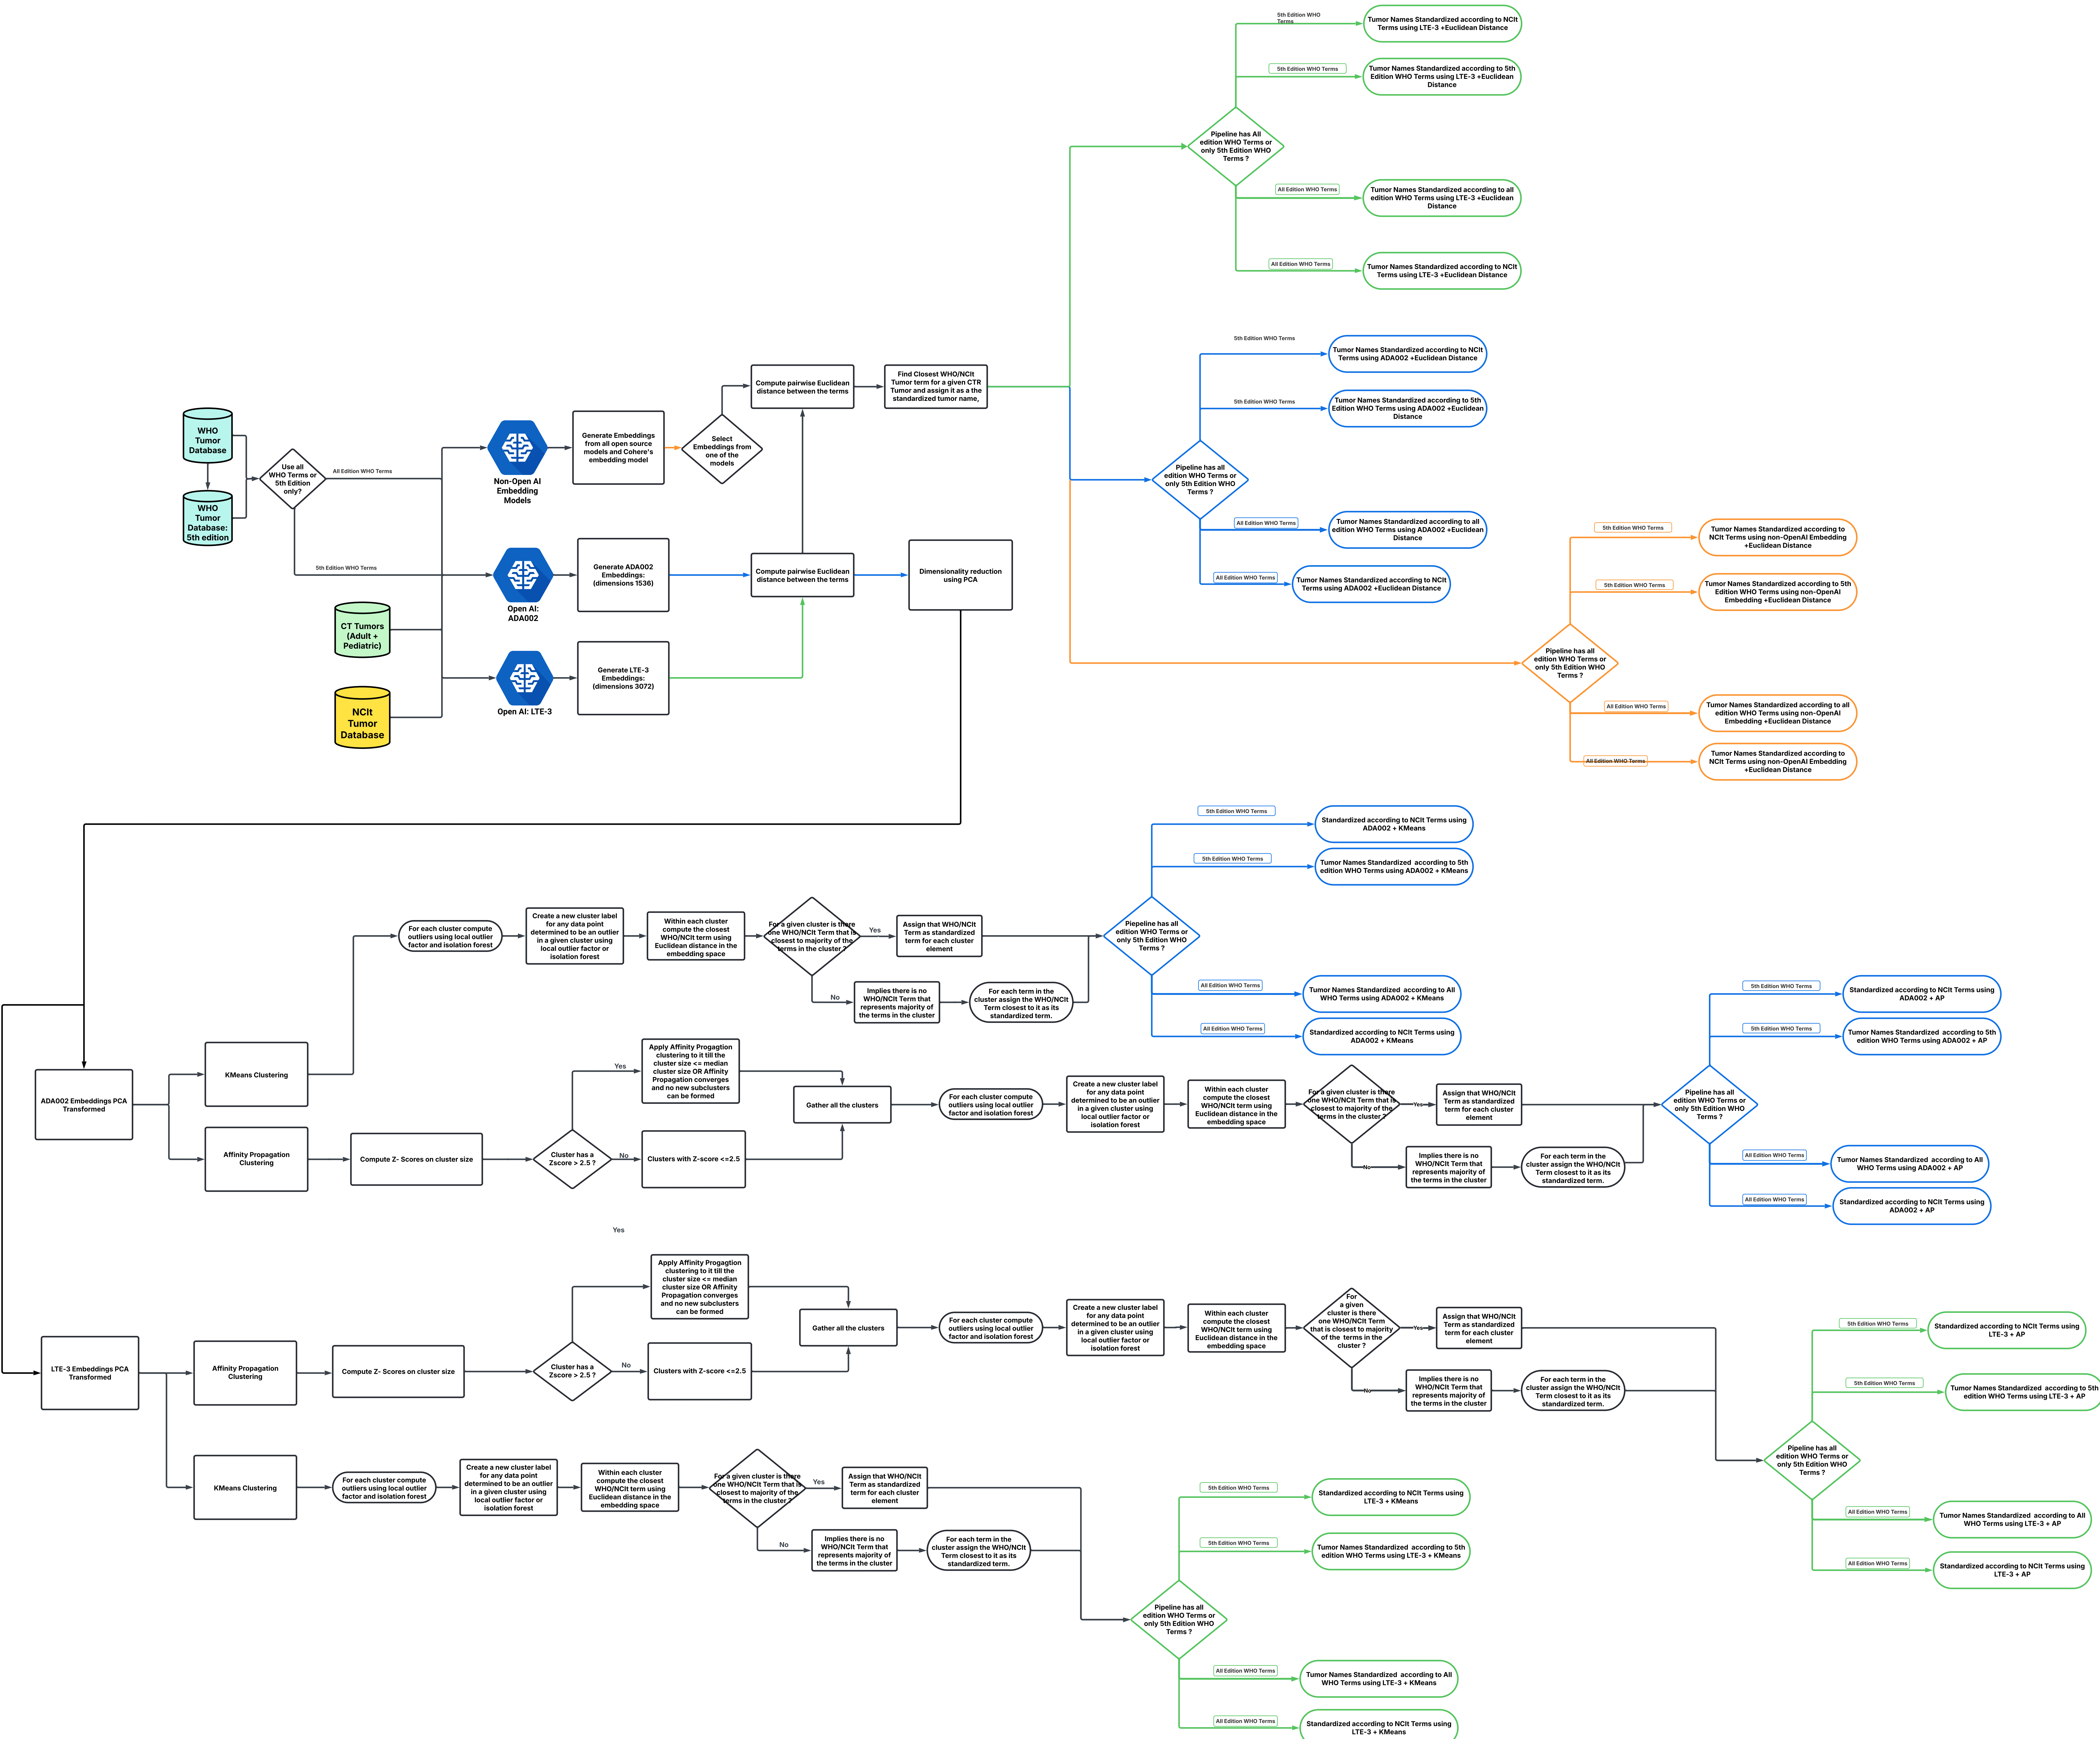

Supplementary Figure SF3: The following figure provides a detailed view of the standardization workflow employed by CANTOS using embeddings obtained from Open AI's ADA-002 and LTE-3 models and from other non-Open AI embedding models . CANTOS standardizes by identifying the closest matching WHO and NCIt terms by computing the Euclidean distance in the embedding space (closest match method). CANTOS also employs a clustering-based standardization workflow using affinity propagation and K-Means clustering using only the Open AI embeddings. CANTOS performs a cluster size analysis for affinity propagation clusters to determine large clusters. In K-Means, the cluster size is predetermined using average silhouette scores, thus cluster size analysis is not performed. Both the clusters formed using affinity propagation, and K-Means pass through an outlier detection step prior to standardization.