

# Steps to implement Hands-on Project - Mission 2

## Amazon Web Services

- Access AWS console and go to IAM service
- Under Access management, Click in "Users", then "Add users". Insert the User name `luxxy-covid-testing-system-en-app1` and click in **Next** to create a programmatic user.



### Specify user details

**User details**

User name

The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and + = , . @ \_ - (hyphen)

☐ **Enable console access - *optional***  
Enables a password that allows users to sign in to the AWS Management Console.

 For programmatic access, you can generate access keys after you create the user. [Learn more](#) 

Cancel

Next

- On Set permissions, Permissions options, click in "Attach policies directly" button.

### Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)

#### Permissions options

☐ Add user to group

Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.

☐ Copy permissions

Copy all group memberships, attached managed policies, and inline policies from an existing user.

☒ Attach policies directly

Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

#### Permissions policies (1037)

Choose one or more policies to attach to your new user.

< 1 2 3 4 5 6 7 ... 52 >

⚙

| <input type="checkbox"/> | Policy name                             | Type                       | Attached entities |
|--------------------------|---|----------------------------|-------------------|
| <input type="checkbox"/> | AccessAnalyzerServiceRolePolicy         | AWS managed                | 0                 |
| <input type="checkbox"/> | AdministratorAccess                     | AWS managed - job function | 1                 |
| <input type="checkbox"/> | AdministratorAccess-Amplify             | AWS managed                | 0                 |
| <input type="checkbox"/> | AdministratorAccess-AWSElasticBeanstalk | AWS managed                | 0                 |
| <input type="checkbox"/> | AlexaForBusinessDeviceSetup             | AWS managed                | 0                 |
| <input type="checkbox"/> | AlexaForBusinessFullAccess              | AWS managed                | 0                 |

- Type AmazonS3FullAccess in Filter distributions by text, property or value, press Enter.
- Select AmazonS3FullAccess

#### Permissions policies (1/1037)

Choose one or more policies to attach to your new user.

1 match

AmazonS3FullAccess X

Clear filters

< 1 >

⚙

| <input checked="" type="checkbox"/> | Policy name        | Type        | Attached entities |
|-------------------------------------|--------------------|-------------|-------------------|
| <input checked="" type="checkbox"/> | AmazonS3FullAccess | AWS managed | 2                 |

- Click in Next
- Review all details

https://thecloudbootcamp.notion.site/Steps-to-implement-Hands-on-Project-Mission-2-176de4ba31eb4c8b8604cf6bdf3ae5ec

2/6

## Review and create

Review your choices. After you create the user, you can view and download the autogenerated password, if enabled.

**User details**

User name

terraform-en-1

Console password type

None

Require password reset

No

**Permissions summary**

< 1 >

| Name               | Type        | Used as            |
|--------------------|-------------|--------------------|
| AmazonS3FullAccess | AWS managed | Permissions policy |

**Tags - optional**

Tags are key-value pairs you can add to AWS resources to help identify, organize, or search for resources. Choose any tags you want to associate with this user.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags.

Cancel

Previous

Create user

- Click in Create user

## Steps to create access key:

- Click on the user you have created.
- Click on Security credentials.
- Scroll down and go to Access keys section.
- Click on Create access key

**Access keys (0)**

Use access keys to send programmatic calls to AWS from the AWS CLI, AWS Tools for PowerShell, AWS SDKs, or direct AWS API calls. You can have a maximum of two access keys (active or inactive) at a time. [Learn more](#)

Create access key

**No access keys**


As a best practice, avoid using long-term credentials like access keys. Instead, use tools which provide short term credentials. [Learn more](#)

Create access key

- Select Command Line Interface (CLI) and I understand the above recommendation and want to proceed to create an access key checkbox.
- Click Next
- Click on Create access key
- Click on Download .csv file
- After download, click Done.
- Now, rename .csv file downloaded to luxxy-covid-testing-system-en-app1.csv

## Google Cloud Platform (GCP)

- Navigate to Cloud SQL instance and create a new user **app** with password **welcome123456** on Cloud SQL MySQL database

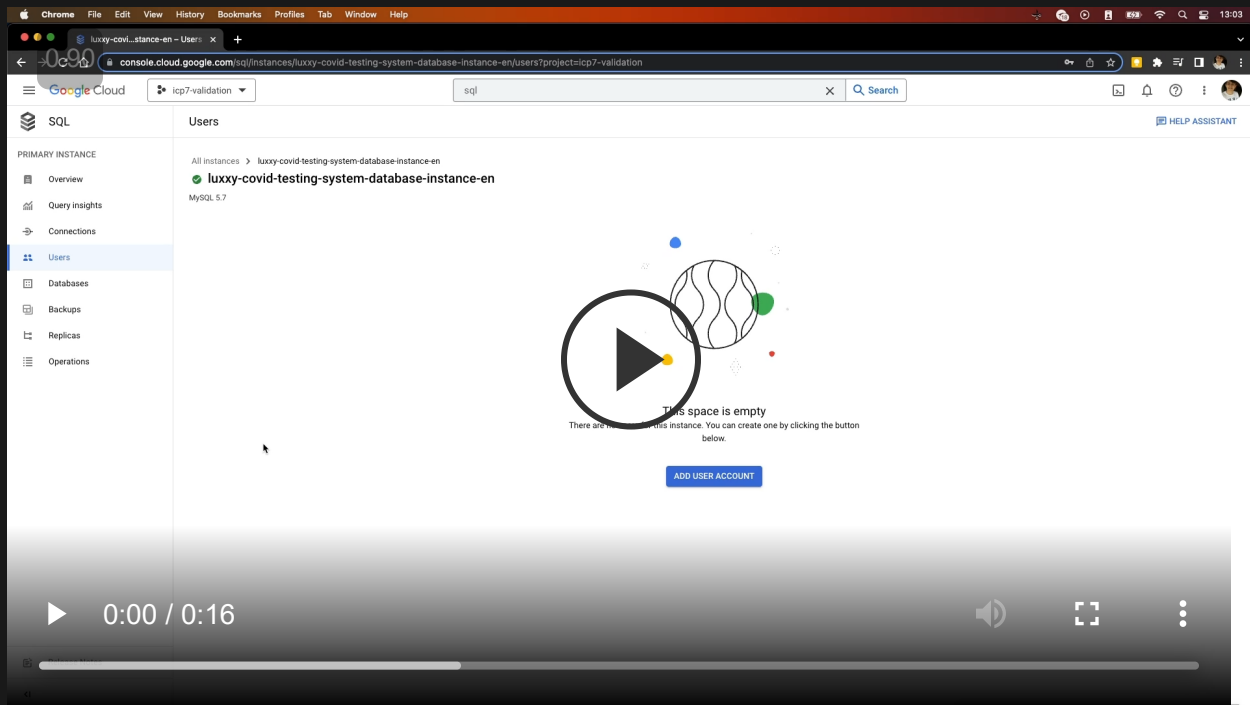

- Connect to Google Cloud Shell
- Download the mission2 files to Google Cloud Shell using the wget command as shown below

```
cd mkdir mission2_en cd mission2_en wget https://tcb-public-events.s3.amazonaws.com/icp/mission2.zip unzip mission2.zip
```

- Connect to MySQL DB running on Cloud SQL (once it prompts for the password, provide **welcome123456**)

```
mysql --host=<public_ip_cloudsql> --port=3306 -u app -p
```

- Once you're connected to the database instance, create the products table for testing purposes

```
use dbccovidtesting; source ~/mission2_en/mission2/en/db/create_table.sql;
show tables; exit;
```

- Enable Cloud Build API via Cloud Shell.

```
# Command to enable Cloud Build API gcloud services enable
cloudbuild.googleapis.com
```

### Known issue during this step

If you see the error below, please follow the steps to fix it:

**ERROR:** (gcloud.builds.submit) INVALID\_ARGUMENT: could not resolve source: googleapi: Error 403: 989404026119@cloudbuild.gserviceaccount.com does not have storage.objects.get access to the Google Cloud Storage object., forbidden To solve it: 1. Access IAM & Admin; 2. Click on your Cloud Build Service Account Example: 989404026119@cloudbuild.gserviceaccount.com Cloud Build Service Account 3. On your Cloud Build Service Account, right side, click on Edit principal 4. Click on Add another role 5. Click on Select Role, and filter by Storage Admin or gcs. Select Storage Admin (Full control of GCS resources). 6. Click on Save and go to Cloud Shell.

- Build the Docker image and push it to Google Container Registry. Please replace the <PROJECT\_ID> with your My First Project ID.

```
cd ~/mission2_en/mission2/en/app gcloud builds submit --tag
gcr.io/<PROJECT_ID>/luxxy-covid-testing-system-app-en
```

- Open the Cloud Editor and edit the Kubernetes deployment file (luxxy-covid-testing-system.yaml) and update the variables below in **red** with your <PROJECT\_ID> on the Google Container Registry path, AWS Bucket name, AWS Keys (from luxxy-covid-testing-system-en-app1.csv) and Cloud SQL Database Private IP.

```
cd ~/mission2/en/kubernetes luxxy-covid-testing-system.yaml image:
gcr.io/<PROJECT_ID>/luxxy-covid-testing-system-app-en:latest ... - name:
AWS_BUCKET value: "luxxy-covid-testing-system-pdf-en-xxxx" - name:
S3_ACCESS_KEY value: "xxxxxxxxxxxxxxxxxxxxxx" - name: S3_SECRET_ACCESS_KEY
value: "xxxxxxxxxxxxxxxxxxxxxx" - name: DB_HOST_NAME value: "172.21.0.3"
```

- Connect to the GKE (Google Kubernetes Engine) cluster via Console (follow the video)
- Deploy the application Luxxy in the Cluster

```
cd ~/mission2_en/mission2/en/kubernetes kubectl apply -f luxxy-covid-testing-
system.yaml
```

- Get the Public IP and test the application ([CLICK HERE to download COVID-19 Testing result sample](#))
- You should see the app up & running! Congrats! 🎉

|             |  |                                       |     |                                    |
|-------------|--|---------------------------------------|-----|------------------------------------|
| Luxxy       | <input type="text" value="Guest Name..."/> | <input type="button" value="Search"/> | New | <a href="#">View Guest Results</a> |
| <div></div> |  |                                       |     |                                    |