

inmos®

INMOS Dx305 occam 2 Toolset Master Index

SGS-THOMSON MICROELECTRONICS

INMOS is a member of the SGS–THOMSON Microelectronics Group

© INMOS Limited 1993. This document may not be copied, in whole or in part, without prior written consent of INMOS.

, inmos, IMS, occam and DS-Link are trademarks of INMOS Limited.

SGS-THOMSON MICROELECTRONICS is a registered trademark of the SGS-THOMSON Microelectronics Group.

INMOS Limited is a member of the SGS-THOMSON Microelectronics Group.

INMOS document number: 72 TDS 378 00

Master index

Key

This master index covers four manuals belonging to the Toolset Documentation set; the notation used to refer to individual documents is as follows:

UG indicates the 'occam 2 Toolset User Guide' 72–TDS–366–01.

TR indicates the 'occam 2 Toolset Reference Manual' 72–TDS–367–01.

LR indicates the 'occam 2 Language and Libraries Reference Manual' 72–TDS–368–01.

PN indicates the document: 'Performance Improvement with the Dx305 occam 2 Toolset' 72–TDS–379–00.

Symbols

.STATIC: *UG* 248, 292

.VSPTR: *UG* 248, 292

.WSSIZE: *UG* 248, 292

!, idebug: *TR* 101, 104, 111, 125

::, idebug: *TR* 115

#
- **idebug**: *TR* 85
- **idump**: *TR* 143
- **isim**: *TR* 274

#alias: *TR* 188

#COMMENT: *UG* 8; *TR* 15; *LR* 139

#define, linker directive: *TR* 189

#IMPORT: *UG* 8; *TR* 14; *LR* 139

#INCLUDE: *UG* 8, 51, 52, 53; *TR* 13; *LR* 139
- in configuration language: *UG* 263

#include, linker directive: *TR* 189

#mainentry: *TR* 189; *PI* 13

#OPTION: *UG* 8; *TR* 16; *LR* 139; *PI* 6, 7

#PRAGMA: *UG* 8; *TR* 17; *LR* 139
- **COMMENT**: *TR* 18
- **EXTERNAL**: *UG* 200; *TR* 18
- **LINKAGE**: *UG* 43; *TR* 18, 190; *LR* 148; *PI* 13, 32
- **PERMITALIASES**: *TR* 19; *PI* 7
- **SHARED**: *TR* 19; *LR* 165; *PI* 7
- **TRANSLATE**: *UG* 201; *TR* 14, 20

#pragma
- **IMS_linkage**: *TR* 190
- **IMS_nolink**: *UG* 211
- **IMS_translate**: *UG* 201

#reference: *TR* 189

#SECTION: *UG* 43

#section: *TR* 190; *LR* 148; *PI* 13

#USE: *UG* 8, 52, 55; *TR* 14; *LR* 3, 4, 139
- in configuration language: *UG* 263

$
- **idebug**: *TR* 85
- **idump**: *TR* 143

%
- **idebug**: *TR* 85, 116
- **imap**: *TR* 241

isim: *TR* 274
@, iserver: *TR* 261
+, idebug: *TR* 126
++, idebug: *TR* 125
***, idebug**: *TR* 92, 116, 121, 123, 128
****, idebug**: *TR* 123, 128

Numbers

2D block move: *LR* 5

A

Abbreviation
  checking: *LR* 164
  configuration language: *UG* 79, 266
  loop unrolling: *PI* 21
  of **PLACED** objects: *PI* 24
  of variables: *PI* 20
Abort: *UG* 120
  interrupt: *UG* 45
  link communication: *UG* 258
  program: *UG* 45
Accuracy of floating point arithmetic: *LR* 22
ACOS: *LR* 38, 57
Action strings, in makefiles: *TR* 235
ADDRESSOF: *UG* 292
Alias: *UG* 293
Alias check: *UG* 48, 293; *TR* 5, 16
  disable: *TR* 10, 19
Alias checking: *LR* 157; *PI* 6
  arrays: *LR* 158
  disable: *PI* 6
  effect of disabling: *LR* 159
  rules: *LR* 157
  warning messages: *UG* 49
Alignment: *LR* 151
  word: *UG* 240
Allocating
  channels to links: *UG* 242
  specific workspace locations: *UG* 241
ALOG: *LR* 27, 45
ALOG10: *LR* 28, 47
ALT: *TR* 9; *LR* 154; *PI* 29
Analyse: *UG* 105, **135**, 241, 293; *TR* 74, 82, 83, 85
  use when debugging: *UG* 107
ANSI C toolset: *UG* 68
ANSI screen protocol: *LR* 103
ANSI–IEEE standard 754: *LR* 21
Apollo: *LR* 80
append.char: *LR* 116
append.hex.int: *LR* 117
append.hex.int64: *LR* 117
append.int: *LR* 116
append.int64: *LR* 116
append.real32: *LR* 117
append.real64: *LR* 117
append.text: *LR* 116
ARC: *UG* 69, 78, 85, 264
Areg: *UG* 134, 281, 291
Argument reduction: *LR* 22
Arithmetic functions
  floating point support: *LR* 13
  IEEE behavior: *LR* 6
  occam: *LR* 6
Array
  alias checking: *LR* 158
  as argument: *UG* 157
  channel: *LR* 152
  constant: *LR* 155
  counted input: *LR* 144
  occam: *UG* 276
  of channels: *UG* 242
  of pointers: *LR* 152
  passing between languages: *UG* 203
  placing on-chip: *PI* 31

  retyping: *LR* 145
  subranges: *TR* 115, 125
  subscripts: *PI* 29
  unknown size: *LR* 155
  usage checking: *LR* 162
ASIN: *LR* 37, 56
ASM: *UG* 245, 246; *TR* 16, 34; *LR* 139, 142
  channel use: *UG* 292
  examples: *UG* 247
  predefined names: *UG* 248
  syntax: *UG* 289
Assembly code: *LR* 142
  direct instructions: *UG* 246
  indirect instructions: *UG* 246
  insertion into occam: *UG* 245
  instruction set: *UG* 281
  operands: *UG* 246
  prefix instructions: *UG* 246
  primary operations: *UG* 246
ASSERT: *UG* 48; *TR* 9, 32; *LR* 18; *PI* 29
Assigning code to transputers: *UG* 14
ATAN: *LR* 39, 58
ATAN2: *LR* 40, 59
Automated program building: *UG* 97

B

B004: *UG* 44, 106; *TR* 285
B008: *UG* 107; *TR* 285
  PC motherboard: *UG* 105
B014, VME motherboard: *UG* 105
B016, VME motherboard: *UG* 105
BACKTRACE: *TR* 112
Backtrace: *UG* 157, 174, 177, 293
Backus-Naur Form, configuration language: *UG* 263
Benchmarks: *PI* 33
Big endian: *UG* 293
binary. *See* **output.format**
Binary byte stream: *LR* 68
Binary lister: *TR* 205
  command line: *TR* 206
  errors: *TR* 219
Binary output, **ieprom**: *UG* 235; *TR* 170
Bit manipulation: *LR* 5, 10
BITCOUNT: *LR* 10
BITREVNBITS: *LR* 10
BITREVWORD: *LR* 10
Block CRC library: *LR* 126
Block mode, **ieprom**: *TR* 171
Block move: *PI* 24
BNF. *See* Backus–Naur Form
Boards
  boot from link: *UG* 105
  boot from ROM: *UG* 105
  connections: *UG* 105
  IMS B004: *UG* 106
  IMS B008: *UG* 105
  IMS B014: *UG* 105
  IMS B016: *UG* 105
  types: *UG* 106
  wiring: *TR* 74
BOOL: *UG* 276; *LR* 152
BOOLTOSTRING: *LR* 123
Boot from link: *TR* 145
  boards: *UG* 105
  collector memory map: *TR* 61, 64
  default collector output: *TR* 52
  loading mechanism: *UG* 104
Boot from ROM: *TR* 52, 59, 145, 163
  boards: *UG* 105
  code, debugging: *UG* 120
  configurer options: *TR* 30
Bootable code: *UG* 44, 293; *TR* 27, 47
  creating: *UG* 38
bootable.file: *TR* 166

Bootstrap: *UG* 293
alternatives: *TR* 60
example: *TR* 347
loaders: *TR* 60, 348
Bptr0: *UG* 134
Bptr1: *UG* 134
BREAK key: *UG* 45; *TR* 255, 288
Breakpoint: *UG* 146; *TR* 90, 276
clearing: *UG* 175
commands: *TR* 90
hardware support: *UG* 125
menu: *TR* 90
phantom: *UG* 155
setting and clearing: *UG* 128
Breakpoint debugging
See also Debugging; Interactive debugging
methods: *TR* 75
Breg: *UG* 134, 282, 291
Buffering processes: *UG* 113
Buffers: *LR* 95
Build files, library: *UG* 296
Building libraries: *TR* 179
BYTE: *UG* 276; *LR* 152
byte.select: *TR* 168

C

C run time library: *LR* 65
C.ENTRY: *UG* 30
C.ENTRYD: *UG* 29
C.ENTRYD.RC: *UG* 29
callc.lib: *UG* 213, 214
callc.lnk: *UG* 212
Capability: *UG* 294; *TR* 255, 259
specific host: *TR* 261
Caplin QT0: *LR* 81
CASE: *LR* 154
debugging occam: *UG* 148
CAT: *LR* 81
CAUSEERROR: *UG* 260; *LR* 18
centry.lib: *TR* 15
CHAN: *UG* 276
CHAN OF ANY: *TR* 9, 33; *LR* 142
CHAN OF SP: *UG* 41, 111
Change control: *UG* 54
CHANGE FILE: *TR* 113
Change processor, debugging: *TR* 103
CHANNEL: *TR* 110
Channel: *UG* 4
See also **CHAN OF**
array: *UG* 242; *LR* 152
array constructors: *UG* 239, 243; *LR* 141
checking: *UG* 49
configuration: *UG* 68
direct: *UG* 85
edge: *UG* 85
fault handling: *UG* 101, 257
hard: *UG* 296
implementation: *LR* 152
initialize: *UG* 102
optimize: *UG* 187
place: *LR* 143
place at address: *UG* 240
placement: *UG* 85, 91, 242
protocols: *LR* 141
reinitialize: *UG* 102, 258
reliable: *UG* 101
reserved: *UG* 224
reset: *UG* 102, 259
retyping: *UG* 243; *LR* 140
soft: *UG* 85, 299
usage: *UG* 49
usage checking: *UG* 49; *LR* 162
use within **ASM**: *UG* 292
virtual: *UG* 85, 86
channel.h: *UG* 276
char.pos: *LR* 114
Character identification: *LR* 112
Check
alias: *UG* 48

channel: *UG* 48
configuration: *UG* 102
usage: *UG* 48
Checking
a network: *TR* 91
occam code: *UG* 246
Clearing
breakpoint: *UG* 175
error flag: *UG* 108, 126; *TR* 133, 289
clibs.lnk: *UG* 31, 232
clibsrd.lnk: *UG* 31, 213, 232
CLIP2D: *LR* 10
Clock: *UG* 134
displayed on Monitor page: *UG* 136
Clock rate: *LR* 155
Clock0: *UG* 134
Clock1: *UG* 134
CMS: *LR* 81
cnonconf.lnk: *UG* 29
Code
allocation in memory: *TR* 34; *LR* 147
using **PLACE** statement: *UG* 239
insertion: *UG* 239, 245; *TR* 16
listing: *TR* 210
placement: *UG* 90, 181
placing on-chip: *PI* 32
position in memory: *UG* 88, 181; *TR* 32, 53, 55
Collecting, simple program: *UG* 37
Collector: *UG* 18
command line: *TR* 48
command line options: *PI* 15
error messages: *TR* 67
information: *PI* 9
input files: *TR* 51
output files: *TR* 51
non-bootable: *TR* 58
Command line: *TR* 293
server: *LR* 76, 77
Command line options
icollect: *TR* 50
idebug: *TR* 77
iemit: *TR* 146
ieprom: *TR* 165
ilibr: *TR* 176
ilink: *TR* 187
ilist: *TR* 207
imakef: *TR* 226
imap: *TR* 241
iserver: *TR* 253
isim: *TR* 272
iskip: *TR* 286
oc: *TR* 7
occonf: *TR* 30
specify transputer target: *TR* 308
COMMENT pragma: *TR* 18
Comments
in EPROM control files: *TR* 165
in object code: *TR* 15, 18
Communicating Sequential Processes: *UG* 4, 294, 305
Communication. *See* Channel
Compare memory, debugging: *TR* 91
compare.strings: *LR* 113
Compatibility
error modes: *TR* 8
with previous toolsets: *TR* 32
Compilation: *UG* 42
error modes: *TR* 8
information: *UG* 43
order of: *TR* 11
separate: *UG* 52
targets: *TR* 7
unit: *UG* 52
Compiler
command line: *TR* 4
command line options: *TR* 5, 7; *PI* 11
diagnostics, implementation data: *TR* 299
directive: *UG* 43

directives: *TR* 12; *LR* 139
syntax: *TR* 13
error messages: *TR* 20
file names: *TR* 7
implementation restrictions: *LR* 155
information: *PI* 9
language keywords: *LR* 139
libraries: *LR* 5
disabling: *TR* 6
introduction: *UG* 9
occam: *UG* 212, 219, 294
user functions: *LR* 5
memory allocation: *LR* 147
memory map: *TR* 11
occam: *TR* 3
optimizations: *PI* 17
in debugging: *UG* 158
selective loading of libraries: *TR* 178
warning messages: *TR* 20
warnings, enable/disable: *TR* 9

Compiling: *UG* 17
for a range of transputers: *TR* 302
for debugging: *UG* 117
for other transputer types: *UG* 39
introduction: *UG* 42
simple example: *UG* 35

Concurrency, hardware support: *UG* 2

CONFIG: *UG* 69, 264, 267

Configuration: *UG* 67, 294
channels: *UG* 85
checking: *UG* 102
code & data placement: *UG* 10
debugging considerations: *UG* 100, 101, 156
description: *UG* 67, 70; *TR* 27
multiple transputer example: *UG* 94
error modes: *TR* 31
examples: *UG* 72, 73, 80
multiple transputer: *UG* 93
simple: *UG* 36
virtual routing: *UG* 194
hardware description: *UG* 68, 74
host connection: *UG* 79
language: *UG* 69
abbreviations: *UG* 79
constraints: *UG* 269
introduction: *UG* 10
optimizing memory: *PI* 14
predefinitions: *UG* 265
syntax: *UG* 263
libraries of linked units: *UG* 82
mapping: *UG* 68
channels: *UG* 87
description: *UG* 83
processes: *UG* 84
mixed language: *UG* 67
model: *UG* 68
occam scope rules: *UG* 68
reliable channels: *UG* 101, 257
single transputer program: *UG* 38
software description: *UG* 68, 81
summary: *UG* 100
using **imakef**: *UG* 97
virtual routing: *UG* 86
warning messages, enable/disable: *TR* 32

Configurer: *UG* 18, 294; *TR* 27
command line: *TR* 28
error messages: *TR* 35
memory map: *TR* 34
options: *TR* 29, 30
producing debuggable programs: *UG* 118
search paths: *TR* 30

CONNECT: *UG* 69, 264

Connecting
boards: *UG* 105
links: *UG* 69, 264
subnetworks: *UG* 105

Connection database: *TR* 260
example: *TR* 263
format: *TR* 262

Connection manager: *UG* 294

Constant arrays: *LR* 155
merging: *PI* 17

Constants: *LR* 4
cached in table: *PI* 17

folding: *PI* 17
include files: *UG* 110
sharing: *UG* 52

CONTINUE FROM: *TR* 111

Conventions
command line options: *TR* 293
command line syntax: *TR* 293
error messages: *TR* 299
filenames: *TR* 294
imakef file extensions: *TR* 298
search paths: *TR* 294
standard file extensions: *TR* 295

convert.lib: *LR* 3, 119

Core dump: *UG* 294; *TR* 74, 143, 279
listing: *TR* 218

COS: *LR* 34, 53

COSH: *LR* 42, 61

CRC functions: *LR* 11, 126

crc.lib: *LR* 3

CRCBYTE: *LR* 12

CRCFROMLSB: *LR* 127

CRCFROMMSB: *LR* 127

CRCWORD: *LR* 12

Creg: *UG* 134, 283, 291

CSP: *UG* 4, 294, 305

cstartrd.lnk: *UG* 29, 212

cstartup.lnk: *UG* 29, 212

Current location, in debugger: *TR* 112

Cursor positioning: *TR* 341

D

DACOS: *LR* 38, 57

DALOG: *LR* 27, 45

DALOG10: *LR* 28, 47

DASIN: *LR* 37, 56

Data, listing all: *TR* 216

DATAN: *LR* 39, 58

DATAN2: *LR* 40, 59

Date: *LR* 94

dblmath.lib: *LR* 3, 20, 26

DCOS: *LR* 34, 53

DCOSH: *LR* 42, 61

Dead code elimination: *PI* 17

deadfix.occ: *UG* 150

Deadlock: *UG* 148, 294

deadlock.occ: *UG* 149

Debug, support functions: *TR* 97, 111

Debug library: *UG* 142

DEBUG.ASSERT: *LR* 130

debug.lib: *LR* 3, 130

DEBUG.MESSAGE: *LR* 130

DEBUG.STOP: *LR* 130

DEBUG.TIMER: *UG* 150; *LR* 131

Debuggable programs: *UG* 116

Debugger: *UG* 19; *TR* 73
command line: *TR* 75
environment variables: *TR* 78
errors: *TR* 133
hints: *UG* 147
information: *PI* 9
kernel: *UG* 123
monitor commands
definitions: *TR* 89–108
editing functions: *TR* 86
mapped by ITERM: *TR* 86
summary: *TR* 86–88
monitor page
commands: *TR* 85
scroll keys: *TR* 88
symbolic commands: *TR* 88
program hangs: *TR* 133
quitting: *UG* 175
scroll keys: *TR* 85
symbolic functions: *TR* 108

Debugging: *UG* 115
See also Interactive debugging; Monitor page; Post–mortem debugging
abusing hard links: *UG* 151
arrays as arguments: *UG* 157
B004 boards: *TR* 82
boot from ROM code: *UG* 120
breakpoint: *UG* 172
catching concurrent processes: *UG* 155
commands, only available in interactive mode: *UG* 128
compiler optimizations: *UG* 158
confidence check: *UG* 153
configured programs: *UG* 118, 156
current location: *TR* 112
data: *TR* 5
deadfix.occ: *UG* 150
deadlock.occ: *UG* 149
direct channel functions: *UG* 118
error modes: *UG* 118
errors: *UG* 158
examining the active network: *UG* 152
example, C: *UG* 159
goto process: *UG* 178
hard parity errors: *UG* 120, 122
important points: *UG* 151
information: *UG* 117
INSPECT: *UG* 152
inspecting channels: *UG* 177; *TR* 110
inspecting memory: *TR* 125
inspecting variables: *UG* 176
interactive: *UG* 116, 123, 172; *TR* 196; *PI* 4
disabling: *UG* 118
INTERRUPT key: *UG* 153
invalid pointers: *UG* 147
large shift values: *UG* 157
library: *UG* 142
library functions, in absence of **idebug**: *UG* 145
loading programs: *UG* 106
low level: *UG* 132
memory size: *UG* 156
mixed language: *UG* 116
Monitor page: *UG* 132
options, for different boards: *TR* 84
post-mortem: *UG* 115, 120, 175
program crashes: *UG* 154
program hangs: *UG* 154
program termination: *TR* 79
root transputer: *UG* 123
seterr: *UG* 156
single step: *TR* 280
soft configuration channels: *UG* 147
tracing processes: *UG* 177
TRAMs: *TR* 82
undetected program crashes: *UG* 154
use of **isim**: *UG* 116
virtual links: *UG* 152
Debugging support library: *LR* 130
DEC VAX: *LR* 80
Default
command line arguments: *UG* 27
error mode: *UG* 42, 118
memory map: *UG* 181; *TR* 34
transputer type: *UG* 42
DELETE: *TR* 228
delete.string: *LR* 115
DEXP: *LR* 29, 48
Direct channels: *UG* 85, 101
Direct instructions: *UG* 246, 281
Directives, linker: *TR* 188; *PI* 13
Directory path: *TR* 294
Disable
alias checking: *UG* 49; *TR* 19
configurer warnings: *TR* 32
error detection: *TR* 8
interactive debugging: *UG* 48, 118; *TR* 16, 33
range checking: *UG* 47
range checks: *TR* 9, 16, 31
run-time checks: *UG* 46; *TR* 9, 16, 31
separate vector space: *TR* 16

usage checking: *UG* 49; *TR* 16, 19
vector space: *UG* 50
virtual routing: *UG* 48, 117; *TR* 32
warning messages: *TR* 9
Disassemble memory: *TR* 92
Display
debugger help page: *UG* 129
debugging messages: *TR* 105
memory: *UG* 137
memory in hex: *TR* 95
memory map: *UG* 136
Monitor page: *UG* 133
object code: *UG* 44; *TR* 205
process queues: *UG* 178
processes: *TR* 105
reference: *TR* 216
run queues: *TR* 104
source code: *UG* 130
timer queues: *TR* 105
DO: *UG* 69, 268
DOS: *UG* 111; *LR* 81
specific library: *LR* 131
dos.call.interrupt: *LR* 133
dos.port.read: *LR* 134
dos.port.write: *LR* 135
dos.read.regs: *LR* 134
dos.receive.block: *LR* 132
dos.send.block: *LR* 132
Down, subsystem wiring: *UG* 105
DPOWER: *LR* 30, 49
DRAM timimg parameters: *TR* 155
DRAN: *LR* 44, 63
DRAW2D: *LR* 9
DRX–11: *LR* 81
DSIN: *LR* 32, 51
DSINH: *LR* 41, 60
DTAN: *LR* 35, 54
DTANH: *LR* 43, 62
Dynamic code loading: *UG* 239, 250
examples: *UG* 253
file format: *TR* 58
listing files: *TR* 218
procedures: *LR* 15

E

Early write: *TR* 153
Echoed keyboard input: *LR* 84
EDGE: *UG* 69, 77, 264
Edge
channel: *UG* 85, 86
declaring: *UG* 77
Editing functions: *TR* 86
Editing makefiles: *TR* 235
Elementary functions: *LR* 20, 25, 45
EMI: *TR* 145
See also External Memory Interface
clock period: *TR* 153
END OF FILE: *TR* 89, 113
End of file: *LR* 73
end.offset: *TR* 168
ENTER FILE: *TR* 113
Entry point: *TR* 20
Entry points
C.ENTRY: *UG* 30
C.ENTRYD: *UG* 29
C.ENTRYD.RC: *UG* 29
Environment variables: *UG* 26, 34; *TR* 342; *LR* 78
accessing through **iserver**: *TR* 328
IBOARDSIZE: *TR* 53
ICOLLECTARG: *TR* 51
ICONDB: *TR* 254, 261
ILIBRARG: *TR* 176
ILINKARG: *TR* 187
ILISTARG: *TR* 208

ISESSION: *TR* 254
ISIMBATCH: *TR* 281
ITERM: *TR* 82, 273
TRANSPUTER: *TR* 254, 260
used by **idebug**: *TR* 78

EPROM: *TR* 30, 59
code layout: *TR* 168
devices: *TR* 172

EPROM program convertor: *TR* 163
binary output: *TR* 170
block mode: *TR* 171
command line: *TR* 164
control file: *TR* 165
errors: *TR* 174
hex dump: *TR* 170
Intel extended hex format: *TR* 171
Intel hex format: *TR* 171
Motorola S-record format: *TR* 170
output files: *TR* 170

EPROM programming: *UG* 21, 233; *TR* 163
collecting: *UG* 236
configuring: *UG* 236
tools, introduction: *UG* 21

eprom.space: *TR* 166

eqstr: *LR* 114

Error: *UG* 105, 241, 295

Error
detection, disable: *UG* 46; *TR* 8, 31
handling: *TR* 299
modes: *UG* 45, 295; *TR* 8, 191
behavior: *TR* 31
compatibility: *TR* 8, 31
configurer: *TR* 31
default: *UG* 42
HALT: *UG* 45, 295; *TR* 8; *PI* 5
in debugging: *UG* 118
selective loading of libraries: *TR* 178
STOP: *UG* 45, 295; *TR* 8; *PI* 5
UNDEFINED: *UG* 46; *TR* 9, 17, 31; *PI* 5
UNIVERSAL: *UG* 46, 295; *TR* 8; *PI* 5
reporting: *UG* 25
runtime: *TR* 300
severities: *TR* 299

Error flag
clearing in a network: *UG* 108, 126; *TR* 133, 289
detection in interactive debugging: *TR* 83
displayed on Monitor page: *UG* 134, 135
of a subsystem: *UG* 105
setting: *UG* 239, 260

Error messages
format: *TR* 299
icollect: *TR* 67
idebug: *TR* 133
idump: *TR* 144
iemit: *TR* 159
ieprom: *TR* 174
ilibr: *TR* 182
ilink: *TR* 199
ilist: *TR* 219
imakef: *TR* 235
imap: *TR* 249
iserver: *TR* 266
additional: *TR* 268
isim: *TR* 282
iskip: *TR* 289
occ: *TR* 20
occonf: *TR* 35
runtime memory initialization: *TR* 56

Escape characters: *LR* 139

Ethernet: *UG* 295; *TR* 251

Event: *UG* 141

Event: *UG* 295; *TR* 99, 279

Examples
#COMMENT: *TR* 16
#IMPORT: *TR* 15
#OPTION: *TR* 17
#PRAGMA EXTERNAL: *TR* 18
#PRAGMA LINKAGE: *TR* 19

#PRAGMA TRANSLATE: *TR* 20
ASM: *UG* 247
bootstrap loader: *TR* 347
collecting: *UG* 37
configuration: *UG* 36
configuration mapping: *UG* 92
connection database: *TR* 263
deadlock: *UG* 149
debugging C: *UG* 159
debugging in post-mortem mode: *UG* 175
debugging occam: *UG* 168
dynamic code loading: *UG* 253
facs.c: *UG* 160
facs.occ: *UG* 169
ieprom control file: *TR* 173
imakef: *TR* 228
mixed languages: *TR* 233
occam: *TR* 231
INLINE: *LR* 144
linking equivalent occam process: *UG* 232
multiple transputer: *UG* 93
multiplexing to host: *UG* 113
network description: *UG* 80
oc: *TR* 5
occonf: *TR* 28
optimized filter program: *UG* 194
passing C parameters: *UG* 273
phantom breakpoints: *UG* 155
pipeline sorter: *UG* 57
placing channels: *UG* 242
resetting B004: *UG* 241
retyping channels: *UG* 244
running a program: *UG* 37
simple program: *UG* 34
simple.occ: *UG* 34
single transputer program: *UG* 38
skip load: *UG* 107
skipping a single processor: *TR* 287
skipping multiple transputers: *TR* 287
software description: *UG* 83
sorter.occ: *UG* 62
type 1 interface: *UG* 227
type 2 interface: *UG* 229
type 3 interface: *UG* 231
use of debugging library: *UG* 144
virtual routing: *UG* 196

Executable code: *UG* 17

EXIT FILE: *TR* 113

EXP: *LR* 29, 48

Exported names, listing: *TR* 212

Expressions
conditional: *PI* 28
pre-evaluate: *PI* 28

Extended data types: *LR* 5
occam: *UG* 295

Extensions
file: *UG* 22; *TR* 295
required by **imakef**: *TR* 222, 298
language: *TR* 3
to occam: *LR* 139

External memory interface: *UG* 295; *TR* 145

EXTERNAL pragma: *TR* 18

External references, listing: *TR* 219

extintel. *See* **output.format**

Extraction of library modules: *TR* 192

Extraordinary link handling library: *LR* 128

Extraordinary use of links: *UG* 239, 256

F

facs.c: *UG* 160
compiling and loading: *UG* 164

facs.occ: *UG* 169
compiling and loading: *UG* 171

FALSE: *PI* 28

Farm. *See* Processor farm

File
access: *LR* 66
access errors: *LR* 74

deletion: *LR* 74
extensions: *UG* 22; *TR* 295
imakef: *UG* 23
imap source files: *TR* 241
required by **imakef**: *TR* 222, 298
identification: *TR* 217, 295
name
conventions: *TR* 294
length: *LR* 156
output: *LR* 89
positioning: *LR* 73
renaming: *LR* 75
streams: *UG* 110
types read by **idebug**: *TR* 77

FINISH: *TR* 114

Floating point
arithmetic: *LR* 5
compiler optimization: *LR* 148
instructions: *UG* 285
registers: *UG* 249
representation: *LR* 21

FMUL: *LR* 45

FORTRAN: *UG* xix, 120

FPError: *UG* 134

Fptr0: *UG* 134

Fptr1: *UG* 134

FRACMUL: *LR* 13

Free memory: *UG* 42; *TR* 35

Free variables: *UG* 295

FUNCTION: *PI* 20, 27

Function keys, **idebug**: *TR* 82

G

Gateway: *UG* 295

Generated error: *LR* 22, 24

GET ADDRESS: *TR* 113

Getting started: *UG* 33

Global static base: *UG* 209, 213

Go to process: *TR* 95

GOTO LINE: *TR* 113

Grid, network topology: *UG* 3

GUY: *TR* 9, 33; *LR* 139, 146

H

HALT error mode: *UG* 45; *TR* 8, 31; *PI* 5
in debugging: *UG* 118

HaltOnError: *UG* 45, 134; *PI* 5

Hard channels: *UG* 296

Hardware configuration description: *UG* 74, 264

Hardware support
for breakpointing: *UG* 125
for concurrency: *UG* 2

Heap area: *TR* 54
mixed language programs: *UG* 213, 225
position in memory: *TR* 53

HELIOS: *LR* 81

HELP: *TR* 88, 108, 113

Help, page in debugger: *UG* 129

hex. *See* **output.format**

HEX16TOSTRING: *LR* 120

HEX32TOSTRING: *LR* 121

HEX64TOSTRING: *LR* 121

Hexadecimal
arguments to **idump**: *TR* 143
listing: *TR* 212

Hexadecimal format
for environment variables: *UG* 27
for EPROM: *UG* 235; *TR* 170
syntax: *UG* 27

HEXTOSTRING: *LR* 120

HOST: *UG* 79, 265

Host: *UG* 296
access: *LR* 76
access to services: *UG* 109
channel protocols: *UG* 111
communications: *UG* 109

connection, in configuration language: *UG* 79
dependencies: *UG* 25
command line syntax: *UG* 25
filenames: *UG* 26
search paths: *UG* 26
environment variables: *UG* 26
for capability: *TR* 261
system call: *LR* 79
versions: *UG* xvii; *TR* xix; *LR* vii; *PI* v

Host file server: *UG* 296; *TR* 251
file streams: *UG* 110
introduction: *UG* 109
library: *LR* 65
terminating: *TR* 288

Hostio library: *UG* 110

hostio.inc: *UG* 110

hostio.lib: *UG* 110; *LR* 3

Hyperbolic functions: *LR* 41

I

IBM 370: *LR* 80

IBM PC: *UG* 7, 111
386: *UG* 25

IBOARDSIZE: *UG* 27, 34, 42; *TR* 53, 79
errors: *TR* 56

icc: *UG* 9

ICCARG: *UG* 28

icconf: *UG* 118

ICCONFARG: *UG* 28

icollect: *UG* 18
command line: *TR* 48
command line options: *TR* 50
environment variables: *TR* 51, 53
errors: *TR* 67

ICOLLECTARG: *UG* 28; *TR* 51

ICONDB: *UG* 27, 34; *TR* 254, 261

idebug: *UG* 19; *TR* 73
command line: *TR* 75
options: *TR* 77
environment variables: *TR* 78
errors: *TR* 133
help page: *UG* 129
interactive mode: *TR* 81
post-mortem debugging: *TR* 79
restarting: *TR* 81

IDEBUGSIZE: *UG* 27; *TR* 79
errors: *TR* 133

idump: *UG* 20; *TR* 74, 143, 255, 285
errors: *TR* 144

IEEE floating point arithmetic: *LR* 5

iemit: *UG* 21; *TR* 145
command line: *TR* 146
DRAM timing parameters: *TR* 155
errors: *TR* 159
index page: *TR* 148
input parameters: *TR* 150
memory read cycle: *TR* 156
memory write cycle: *TR* 157
timing information: *TR* 154

ieprom: *UG* 21, 233, 235; *TR* 163
command line: *TR* 164
control file: *TR* 165
errors: *TR* 174

IF: *UG* 69, 98, 266; *TR* 9
debugging occam: *UG* 148

ilibr: *UG* 20; *TR* 175, 177
command line: *TR* 176
command line options: *TR* 176
error messages: *TR* 182

ILIBRARG: *UG* 28; *TR* 176

ilink: *UG* 17; *TR* 185
command line: *TR* 186
indirect files: *TR* 187

ILINKARG: *UG* 28; *TR* 187

ilist: *UG* 20; *TR* 15, 205; *LR* 4
command line: *TR* 206
command line options: *TR* 207
errors: *TR* 219

ILISTARG: *UG* 28; *TR* 208
imakef: *UG* 20, 39, 54, 97; *TR* 3, 7, 13, 198, 221
  command line: *TR* 225
  command line options: *TR* 226
  deleting intermediate files: *TR* 228
  errors: *TR* 235
  examples: *TR* 228
  file extensions: *TR* 222, 298
  file formats: *TR* 234
  linker indirect files: *TR* 225, 227
  mixed language example: *TR* 233
  occam examples: *TR* 231
  target files: *TR* 222
imap: *UG* 20; *TR* 239; *PI* 10
  command line: *TR* 240
  command line options: *TR* 241
  errors: *TR* 249
  output file structure: *TR* 243
Implementation
  channels: *LR* 152
  compiler diagnostics: *TR* 299
  occam: *LR* 147
  restrictions: *LR* 155
Importing C functions: *UG* 213
IMS B004: *TR* 285; *LR* 81
IMS B008: *TR* 285; *LR* 81
IMS B010: *LR* 81
IMS B011: *LR* 81
IMS B014: *LR* 81
IMS B015: *LR* 81
IMS B016: *LR* 81
IMS B404: *TR* 83
IMS D700: *LR* 98
IMS T800: *UG* 135
IN: *LR* 139
Include file: *UG* 110, 296
  occonf.inc: *UG* 70, 187, 192
Indirect instructions: *UG* 246, 282
inexact.NaN: *LR* 21
Infinity: *LR* 21
INFO: *TR* 110
Information, provided by toolset: *PI* 9
init.heap: *UG* 214
init.static: *UG* 214
Initialize
  channel: *UG* 102
  link: *UG* 258
  parity checked memory: *UG* 126
INLINE: *LR* 139, 143; *PI* 27
  disadvantage: *PI* 31
InputOrFail.c: *UG* 102; *LR* 129
InputOrFail.t: *UG* 101; *LR* 128
INQUEST: *UG* xix; *TR* xxi, 34
insert.string: *LR* 115
INSPECT: *UG* 176; *TR* 109
Inspect memory: *TR* 96
Instruction pointer: *UG* 134
  invalid: *UG* 147
Instruction prefixing: *PI* 1
Instruction set: *UG* 281
INT: *UG* 276; *LR* 152
INT16: *UG* 276; *LR* 152
  on 32–bit transputers: *PI* 29
INT16TOSTRING: *LR* 120
INT32: *UG* 276; *LR* 152; *PI* 29
INT32TOSTRING: *LR* 120
INT64: *UG* 276; *LR* 152
INT64TOSTRING: *LR* 120
intel. *See* **output.format**
Intel extended hex format: *UG* 235
  ieprom: *TR* 170
Intel hex format: *UG* 235
  ieprom: *TR* 170
Interactive debugging: *UG* 116, 123, 129; *PI* 4
  See also Debugging

  addresses of variables: *UG* 166
  backtracing: *UG* 166, 174
  backtracing to **main()**: *UG* 167
  breakpoint commands: *UG* 132
  browsing source code: *UG* 130
  clearing a breakpoint: *UG* 175
  collector option: *TR* 66
  compiler option: *UG* 48
  compiler support: *TR* 10
  configurer option: *TR* 33
  detecting the error flag: *TR* 83
  disabling: *UG* 48, 118; *TR* 33
  entering **#include** files: *UG* 168
  inspecting by expression: *UG* 167
  inspecting variables: *UG* 131, 166, 173
  invocation: *TR* 81
  jumping down a channel: *UG* 167, 174
  jumping down channels: *UG* 131
  locating to code: *UG* 130
  methods: *TR* 75
  modifying a variable: *UG* 167, 174
  modifying variables: *UG* 132
  program loading: *UG* 126
  program termination: *UG* 128
  quitting: *UG* 168, 175
  resuming program: *UG* 174
  runtime kernel: *UG* 123
  setting breakpoints: *UG* 165, 173
  starting a program: *UG* 166, 173
  tracing procedure calls: *UG* 131
INTERRUPT: *TR* 111
Interrupt, program: *UG* 45
  in debugging: *UG* 153
INTTOSTRING: *LR* 120
Invalid pointers: *UG* 147
Iptr: *UG* 134, 281
IptrIntSave: *UG* 134
iq systems: *UG* 102, 108, 126
is.digit: *LR* 113
is.hex.digit: *LR* 113
is.id.char: *LR* 113
is.in.range: *LR* 112
is.lower: *LR* 113
is.upper: *LR* 113
ISEARCH: *UG* 27, 34; *TR* 30, 294; *LR* 69
iserver: *UG* 18, 103, 109; *TR* 251, 285
  accessing transputers: *TR* 260
  capability: *TR* 255
  command line: *TR* 252
  command line options: *TR* 252
  connection manager: *TR* 265
  environment variables: *TR* 254
  error codes: *TR* 266
  error messages: *TR* 266
  exit codes: *TR* 266
  functions: *TR* 251
  halt system error mode: *TR* 255
  loading programs: *TR* 254
  new features: *TR* 265
  passing parameters to a program: *TR* 255
  protocol: *TR* 309
    ALSYS – Alsys call: *TR* 335
    CommandArgs – get command line arguments: *TR* 333
    CommandLine – get server command line: *TR* 329
    Core – read peeked memory: *TR* 330
    Exit – exit the server: *TR* 329
    Fclose – close a file: *TR* 312
    Feof – test for end of file: *TR* 321
    Ferror – get file error status: *TR* 322
    FerrStat – Get file error status: *TR* 324
    Fflush – flush a stream: *TR* 316
    FGetBlock – read and return success: *TR* 314
    FGetRec – read a record: *TR* 319
    Fgets – read a line: *TR* 315
    file commands: *TR* 311
    FileExists: *TR* 324
    Fopen – open a file: *TR* 311

FopenRec – open record file: *TR* 317
FPutBlock – write and return success: *TR* 315
FPutEOF – write end-of-file: *TR* 320
FPutRec – write a record: *TR* 319
Fputs – write a line: *TR* 316
Fread – read block of data: *TR* 313
Fseek – set position in a file: *TR* 320
Ftell – find position in a file: *TR* 321
Fwrite – write block of data: *TR* 313
Getenv – get host variable: *TR* 326
GetInfo – get host and server info: *TR* 332
Getkey – get keystroke: *TR* 325
host commands: *TR* 325
Isatty – terminal connect status: *TR* 323
KPAR – Kpar call: *TR* 336
MSDOS – MS-DOS command: *TR* 334
packets: *TR* 309
Pollkey – test for key press: *TR* 325
record structured file commands: *TR* 317
record structured file format: *TR* 336
Remove – delete a file: *TR* 322
Rename – Rename a file: *TR* 323
Requestkey – request keyboard event: *TR* 326
reserved commands: *TR* 334
server commands: *TR* 329
SocketA – socket library call: *TR* 335
SocketM – socket library call: *TR* 335
System – run a command: *TR* 327
termination codes: *TR* 337
Time – get the time of day: *TR* 327
Translate – translate an environment variable: *TR* 328
Version – server info: *TR* 331
record structured files: *TR* 266
session manager: *TR* 252, 256, 265
customizing interface: *TR* 258
specifying the transputer to use: *TR* 255
stream identifier validation: *TR* 266
subsystem reset: *TR* 254
terminating: *TR* 255
on error: *TR* 255
user interrupt: *TR* 265
ISESSION: *UG* 27; *TR* 254, 256
isim: *UG* 21, 65, 146; *TR* 271
command line: *TR* 271
command line options: *TR* 272
errors: *TR* 282
ISIMBATCH: *UG* 27; *TR* 281
iskip: *UG* 18, 103; *TR* 74, 285
command line: *TR* 286
command line options: *TR* 286
errors: *TR* 289
ispy: *UG* 102, 108, 126; *TR* 133, 289
ITERM: *UG* 27; *TR* 79, 82, 273, 342
ITERM file
example listing: *TR* 344
format: *TR* 339
keyboard: *TR* 342
screen: *TR* 340
use by simulator: *TR* 273, 274
version: *TR* 340

J

JEDEC, symbol: *TR* 154, 156
Jump, in **ASM** code: *UG* 248
Jump instructions, in ROM: *TR* 169
Jump into program: *TR* 97
Jumping down a channel: *UG* 131, 167, 174; *TR* 110

K

KERNEL.RUN: *UG* 250; *LR* 15
Keyboard
definitions: *TR* 342
input: *LR* 82, 100
polling: *LR* 83
Keystream
input: *LR* 104
protocol: *LR* 98
ks: *LR* 98, 99
ks.keystream.sink: *LR* 101
ks.keystream.to.scrstream: *LR* 101
ks.read.char: *LR* 104
ks.read.int: *LR* 105
ks.read.int64: *LR* 105
ks.read.line: *LR* 104
ks.read.real32: *LR* 105
ks.read.real64: *LR* 105

L

Label, in **ASM** code: *UG* 248
LAN: *UG* 296
Language extensions: *LR* 139
Large programs: *UG* 53
Large shift values: *UG* 157
Late write: *TR* 153
Lexical levels: *LR* 156
LFF files, listing: *TR* 218
libc.lib: *TR* 15
Librarian: *UG* 20; *TR* 175
command line: *TR* 176
concatenated input: *TR* 175
linked object input: *TR* 177
options: *TR* 176
Library: *UG* 296; *LR* 3
block CRC: *LR* 126
build files: *UG* 296
building: *UG* 55; *TR* 179
building optimized: *TR* 179
C runtime
full: *UG* 232
reduced: *UG* 232
compilation: *TR* 10
compiler: *UG* 9; *LR* 5
debugging: *UG* 142
debugging support: *LR* 130
displaying: *LR* 4
DOS specific: *LR* 131
extraction of modules: *TR* 192
extraordinary link handling: *LR* 128
host file server: *LR* 65
index: *TR* 175, 178
indirect files: *TR* 175, 177
imakef: *TR* 225
linking supplied libraries: *UG* 28; *TR* 188
listing index: *TR* 214
maths: *UG* 9; *LR* 20
modules: *TR* 177
occam: *UG* 9, 221
of linked units: *UG* 82
optimized T4 series: *LR* 20, 45
selective loading of: *TR* 178
streamio: *LR* 98
string handling: *LR* 111
type conversion: *LR* 119
usage files: *UG* 296; *TR* 178
imakef: *TR* 225
using: *UG* 54
LINE DOWN: *TR* 89
Line parsing: *LR* 117
LINE UP: *TR* 88
Link: *UG* 3, 296
addresses: *UG* 243
debugging: *TR* 99
debugging simulated: *TR* 279
failure: *UG* 256; *LR* 128

introduction: *UG* 2
long messages: *PI* 37
map: *TR* 197
optimization: *PI* 35
prioritization: *PI* 36
recovery from failure: *UG* 258
renitialize: *UG* 258
virtual: *UG* 86

link: *UG* 74, 265

Link handling library: *LR* 128

linkaddr.inc: *UG* 243

LINKAGE pragma: *TR* 18

Linker: *UG* 17, 297; *TR* 185
command line: *TR* 186
command line options: *PI* 13
compatible transputer classes: *TR* 190
directives: *TR* 188; *PI* 13
errors: *TR* 199
extraction of library modules: *TR* 192
indirect files: *UG* 28; *TR* 187
imakef: *TR* 225, 227
information: *PI* 9
LFF output: *TR* 191
selective loading of libraries: *TR* 178
startup files: *UG* 28
clibs.lnk: *UG* 232
clibsrd.lnk: *UG* 232
TCOFF output: *TR* 191

Linking
introduction: *UG* 43
mixed language programs: *UG* 212
simple example: *UG* 35
transputer targets: *TR* 301

Linkops: *UG* 297

linkquota: *UG* 75, 92, 190, 265

Lister: *UG* 20
See also **ilist**
information: *PI* 9

Little endian: *UG* 297

LOAD.BYTE.VECTOR: *UG* 250; *LR* 15, 17

LOAD.INPUT.CHANNEL: *UG* 250; *LR* 15, 16

LOAD.INPUT.CHANNEL.VECTOR: *UG* 250; *LR* 15, 16

LOAD.OUTPUT.CHANNEL: *UG* 250; *LR* 15, 17

LOAD.OUTPUT.CHANNEL.VECTOR: *UG* 250; *LR* 15, 17

Loader: *UG* 297

Loading programs: *UG* 44, 103
for breakpoint debugging: *UG* 106
for debugging: *UG* 106
for interactive debugging: *UG* 126
introduction: *UG* 18
iserver: *TR* 251
iskip: *TR* 288
methods: *UG* 104
onto boards and subnetworks: *UG* 104
tools: *UG* 103

LoadStart: *UG* 181; *TR* 34, 35, 61, 63

localhost: *TR* 261

Location, in debugger: *TR* 112

location: *PI* 8

location.code: *UG* 75, 90, 184, 265; *TR* 32; *PI* 14

location.vs: *UG* 75, 90, 184, 265; *TR* 32; *PI* 14

location.ws: *UG* 75, 90, 184, 265; *TR* 32; *PI* 14

Logical name: *TR* 342

Logical processor: *UG* 69

Long reals: *LR* 26

Loop unrolling: *PI* 21

Lower case: *LR* 113, 116

Low-level programming: *UG* 239

M

Macros, in makefiles: *TR* 234

Main entry point: *TR* 195

MAIN.ENTRY: *UG* 222
procedure interface: *UG* 226

MAKE: *UG* 66

Make programs: *TR* 221
Borland: *TR* 221
Gnu: *TR* 221
Microsoft: *TR* 221
UNIX: *TR* 221

Makefile generator: *UG* 20, 39, 54; *TR* 221
command line: *TR* 225
errors: *TR* 235

Makefiles: *UG* 297
delete rule: *TR* 235
editing: *TR* 235
formats: *TR* 234
macros: *TR* 234

MAP: *UG* 69, 268

MAPPING: *UG* 69, 264, 267

Mapping
channels: *UG* 87
description: *UG* 83
examples: *UG* 92
in configuration description: *UG* 267
processes: *UG* 84
with **MAPPING**: *UG* 87
without **MAPPING**: *UG* 88

Master transputer, of a system: *UG* 105

Maths
functions: *LR* 6
libraries: *LR* 20
introduction: *UG* 9

MemConfig: *TR* 145

MemnotWrD0: *TR* 145

Memory
allocation: *UG* 50; *LR* 147; *PI* 8
configuration
ASCII output: *TR* 148
customized: *TR* 145
file: *TR* 160
in PAL: *TR* 145
in ROM: *TR* 145, 168
PostScript output: *TR* 148
standard: *TR* 145, 153
table: *TR* 158
configurer: *TR* 145
command line: *TR* 146
default configuration: *TR* 148
errors: *TR* 159
input parameters: *TR* 150
interactive operation: *TR* 148
output files: *TR* 148
disassembly: *TR* 276
Hex display: *TR* 95
initializing: *UG* 126, 225
inspecting: *TR* 278
interface, configurable, T4 and T8 series: *TR* 145
map: *UG* 181
mapper: *TR* 239
command line: *TR* 240
errors: *TR* 249
on-chip: *UG* 1; *TR* 18, 35
ordering code: *UG* 88
parity-checked: *TR* 57
placing code: *UG* 90, 181
read cycle: *TR* 156
reserved words
IptrIntSave: *UG* 134
WdescIntSave: *UG* 134
reserving: *UG* 89
write cycle: *TR* 157

Memory dump: *UG* 123
example: *UG* 176

Memory dumper: *UG* 20; *TR* 143
command line: *TR* 143
error messages: *TR* 144

Memory map: *UG* 181; *TR* 100, 279
boot from link (network): *TR* 64
boot from link (single processor): *TR* 61
boot from ROM: *TR* 65
collector output: *TR* 60
configurer: *TR* 34
displayed on monitor page: *UG* 136

memory.configuration: *TR* 166
memsize: *UG* 74, 265
MemStart: *LR* 147
MemStart: *UG* 89, 135; *TR* 35, 61
MemWait: *TR* 153, 157
  connection error: *TR* 159
Message length: *PI* 37
Mixed language programming: *UG* 199
  #IMPORT directive: *TR* 14
  example: *UG* 273
  heap area: *UG* 213
  importing C code: *UG* 213
  introduction: *UG* 11
  linking: *UG* 212
  occam libraries: *UG* 221
  reduced runtime library: *UG* 220
  static area: *UG* 213
  TRANSLATE pragma: *TR* 20
  use of **imakef**: *TR* 233
  vector space: *UG* 221
  workspace: *UG* 221
[MODIFY]: *TR* 111
Module data, listing: *TR* 213
[MONITOR]: *TR* 114
Monitor page: *UG* 132
  See also Debugging
  breakpoint commands: *UG* 139
  command format: *UG* 137
  commands: *TR* 85
  data displayed: *UG* 134
  default address: *TR* 85
  display virtual links: *TR* 107
  Enter post-mortem: *TR* 106
  examining memory: *UG* 137
  exit: *TR* 106
  locating processes: *UG* 137
  selecting process: *UG* 138
  simulator: *TR* 273
  specifying process: *UG* 138
  startup display: *UG* 133
  switching processor: *UG* 138
Monitoring the error status: *TR* 288
MOSTNEG INT: *UG* 240, 247; *TR* 85; *LR* 148
MOSTPOS INT: *UG* 247; *LR* 147, 148, 156
Motorola S-record format: *UG* 235
  ieprom: *TR* 171
MOVE2D: *LR* 9
Moving code and data areas: *UG* 88
Moving the cursor: *LR* 109
MS-DOS: *UG* 7, 25, 26, 27; *TR* 293
  library: *LR* 131
    introduction: *LR* 3
Multidemensional array, null element: *LR* 145
Multiplexing: *UG* 10
  examples: *UG* 113
  processes: *UG* 111
Multiplexors: *LR* 95, 96
Multiprocessor, optimization: *PI* 35

N

NaN: *LR* 21
NEC PC: *LR* 80
NETWORK: *UG* 69, 264
Network: *UG* 297
  configuration: *UG* 67
  description: *UG* 75
    examples: *UG* 80
  dump: *TR* 101
    listing: *TR* 218
  grid: *UG* 3
  optimization: *PI* 35
  pipeline: *UG* 3
  Tree: *UG* 3
Next error: *TR* 93
next.int.from.line: *LR* 118
next.word.from.line: *LR* 118
nfix: *UG* 246

NODE: *UG* 68, 69, 264
  attributes: *UG* 74
nodebug: *UG* 75, 265
Non-bootable files, format: *TR* 58
Non–configured programs. *See* **icollect**
NOP: *UG* 291
noprofile: *UG* 75, 265
Not a number. *See* **NaN**
notMemRd: *TR* 152
notMemS0: *TR* 152
notMemS4: *TR* 152
notMemWrB: *TR* 152
NotProcess: *UG* 135
Numerical parameters, interpretation by **isim**: *TR* 274

O

Object code: *UG* 297
  displaying: *UG* 44; *TR* 205
Object file: *TR* 4
  format: *UG* 7, 17
oc: *TR* 3
  command line options: *TR* 7
  error messages: *TR* 23
  memory map: *TR* 11
  syntax: *TR* 4
  warning messages: *TR* 20
occam
  array: *UG* 276
  compiler libraries: *UG* 9, 294
  configuration language: *UG* 263
  equivalent process: *UG* 222
  extended data types: *UG* 295
  function return values: *UG* 272, 277
  implementation: *LR* 147
  interface code: *UG* 222; *TR* 52
  language extensions: *LR* 139
  libraries: *UG* 221; *LR* 3
  low-level programming: *UG* 239
  maths libraries: *UG* 9
  mixing with C code: *UG* 199
  obsolescent features: *LR* 145
  programming model: *UG* 8
  programs: *UG* 41
  standard libraries: *UG* 9
occam 2 toolset, introduction: *UG* 7
occam2.lnk: *UG* 30, 43, 212
occam8.lnk: *UG* 30, 43, 212
occama.lnk: *UG* 30, 43, 212
occonf: *UG* 10, 67, 87, 118; *TR* 27
  command line options: *TR* 29, 30
  error messages: *TR* 35
  interaction with **idebug**: *UG* 100
  syntax: *TR* 28
  warning messages: *TR* 36
occonf.inc: *UG* 70, 92, 186, 187, 192
On-chip memory: *UG* 1
  use for program stack: *UG* 225
On-chip RAM: *UG* 43, 50; *TR* 18, 35
Operating systems
  command lines: *UG* 25
  dependencies: *UG* 25
  MS-DOS: *UG* 25
  SunOS: *UG* 25
  UNIX: *UG* 25
  VMS: *UG* 25
opr: *UG* 246
Optimization
  code placement: *UG* 181; *TR* 18
  code size: *PI* 31
  links: *PI* 35
  multiprocessor: *PI* 35
  of source code: *PI* 19
  performed by compiler: *PI* 17
  space versus time: *PI* 3
  use of occam: *PI* 26
  virtual routing: *UG* 187
Options
  in occam source: *TR* 16

prefix: *UG* 25
specify transputer target: *TR* 308
standard: *TR* 293
unsupported: *UG* 31; *TR* 294

order.code: *UG* 75, 88, 185, 265; *TR* 32; *PI* 8, 14

order.vs: *UG* 75, 88, 185, 265; *TR* 32; *PI* 8, 14

order.ws: *UG* 88, 185, 265; *TR* 32; *PI* 8, 14

Out of memory errors, **idebug**: *TR* 133

output.address: *TR* 168

output.all: *TR* 167

output.block: *TR* 167

output.format: *TR* 167

OutputOrFail.c: *UG* 102; *LR* 129

OutputOrFail.t: *UG* 101; *LR* 129

P

PAGE DOWN: *TR* 89

PAGE UP: *TR* 89

PAR: *UG* 81; *TR* 9; *LR* 149, 155

Parallel processing
example: *UG* 62
introduction: *UG* 4

Parameter passing: *UG* 271, 275

Parameters
access to: *PI* 28
GSB: *UG* 213
occam and C equivalents: *UG* 271, 275
passing by reference: *UG* 201
passing by value: *UG* 201
TIMER: *UG* 203
to **KERNEL.RUN**: *UG* 251

Parity checked memory, initializing: *UG* 126

Parity error registers, displayed on Monitor page: *UG* 136

Parity errors, post-mortem debugging: *UG* 120, 122

ParityAddr: *UG* 134

ParityError: *UG* 134

Parsing command line: *LR* 77

Path searching: *TR* 294

Peek: *UG* 298

Performance improvement: *PI* 1

PERMITALIASES pragma: *TR* 19

pfix: *UG* 246, 291

Phantom breakpoints: *UG* 155

Physical processor: *UG* 69

Pipeline, network: *UG* 3

Pipeline sorter, example configuration: *UG* 93

Pipelining processes: *UG* 113

PLACE: *UG* 51, 239; *LR* 143, 152, 155
channels on links: *UG* 242
examples: *UG* 240
syntax: *LR* 143
then abbreviate: *PI* 24
when not to use: *PI* 23

PLACE name IN VECSPACE: *PI* 6, 22

PLACE name IN WORKSPACE: *PI* 6, 22

PLACED PAR: *UG* 81

Placement
array of channels: *LR* 143
at address: *UG* 239; *LR* 142
channels: *UG* 85, 240; *LR* 143
code: *UG* 88, 90, 181
in vector space: *LR* 143
in workspace: *LR* 143
variable in workspace: *UG* 242
variables: *LR* 143

Pointer to channel: *UG* 242; *LR* 152

Poke: *UG* 298

PORT: *UG* 276

Port: *UG* 241; *TR* 22
place at address: *UG* 239; *LR* 142

Post-mortem debugging: *UG* 115, 120
See also debugging
communication on channels: *UG* 141
communication on links: *UG* 141
communication on virtual links: *UG* 141
dummy network: *TR* 75
from core dump: *TR* 75
hard parity errors: *UG* 120, 122
invocation: *TR* 79
locating procedures and functions: *UG* 142
outline of method: *UG* 139
R-mode programs: *TR* 74
stopped process: *UG* 142
stopped process location: *UG* 140
T-mode programs: *TR* 74
waiting on run queue: *UG* 140
waiting on timer queue: *UG* 140

PostScript: *UG* 298

POWER: *LR* 30, 49

Pragmas. *See* **#PRAGMA**

Preamble: *UG* 298

Prefixing instructions: *UG* 246, 281; *PI* 1

PRI ALT: *LR* 154

PRI PAR: *LR* 149, 154, 155
nested: *LR* 155
replicated: *LR* 155

Primary operations: *UG* 246

Priority: *UG* 298; *TR* 104; *LR* 154
links: *PI* 36

PROC: *PI* 20, 27

PROC.ENTRY: *UG* 223
procedure interface: *UG* 227

PROC.ENTRY.RC: *UG* 223
procedure interface: *UG* 230

ProcClockOut: *TR* 152, 153

Procedural interface data, listing: *TR* 215

Procedure parameters: *UG* 251

Process: *UG* 4, 298
descriptor: *UG* 134
invalid: *UG* 147
memory map: *TR* 105
pointers, in debugging: *UG* 135
queue: *UG* 135, 140; *TR* 280
displaying: *TR* 104
scheduling: *UG* 260

PROCESSOR: *UG* 68, 69, 267

Processor
farms: *PI* 39
names: *TR* 99
types: *TR* 301

Program building, automated: *UG* 66

Program development, introduction: *UG* 13

Program hangs, debugging: *UG* 154

Program termination, interactive debugging: *UG* 128

Programmable memory interface: *UG* 1

Programs, loading: *UG* 103

Propagated error: *LR* 23, 25

PROTOCOL: *LR* 156

Protocol: *UG* 298
in debugging: *UG* 123
include files: *UG* 110
iserver: *UG* 104; *TR* 309
sharing: *UG* 52
SP: *UG* 104, 111
tag: *LR* 151
used by standard libraries: *UG* 123

Pseudo operations: *UG* 247, 291

Q

Queue
  process: *UG* 140, 178; *TR* 104, 280
  run: *UG* 135, 138, 140; *TR* 104, 280
  timer: *UG* 135, 138, 140; *TR* 280
Quit
  debugger: *TR* 104
  simulator: *TR* 279

R

R-mode programs: *TR* 74
RAM: *UG* 234; *TR* 18, 30, 59, 65
  on-chip
    improve use of: *PI* 1, 3
    not enough: *PI* 8
    placing arrays in: *PI* 31
    placing code in: *PI* 32
RAN: *LR* 44, 63
Random number generation: *LR* 44
Range reduction: *LR* 22
Read, strobe: *TR* 152
REAL: *LR* 65
Real numbers: *LR* 65
Real-time programming: *UG* 3
REAL32: *UG* 276
REAL32TOSTRING: *LR* 121
REAL64: *UG* 276
REAL64TOSTRING: *LR* 122
Reduced library: *UG* 232
REFRESH: *TR* 88, 108
Refresh period: *TR* 152
Registers
  Areg: *UG* 134, 281
  assigning value: *TR* 280
  Bptr0: *UG* 134
  Bptr1: *UG* 134
  Breg: *UG* 134, 282
  Clock0: *UG* 134
  Clock1: *UG* 134
  Creg: *UG* 134, 283
  displayed on Monitor page: *UG* 135
  Error: *UG* 134
  FPError: *UG* 134
  Fptr0: *UG* 134
  Fptr1: *UG* 134
  HaltOnError: *UG* 134
  Iptr: *UG* 134, 281
  memory dump: *TR* 144
  ParityAddr: *UG* 134
  ParityError: *UG* 134
  Tptr0: *UG* 134
  Tptr1: *UG* 134
  Wdesc: *UG* 134
  Wreg: *UG* 281
Reinitialise: *UG* 102, 258; *LR* 129
Reinitialize
  channels: *UG* 102
  link: *UG* 258
RELOCATE: *TR* 88, 107, 112
Replicated **PAR**: *LR* 149, 155
RESCHEDULE: *UG* 260; *LR* 18; *PI* 30
reserved: *UG* 75, 89, 183, 265; *TR* 35; *PI* 8, 14
Reserved channels, in occam
  equivalent processes: *UG* 224
Reserving memory: *UG* 89, 183
Reset: *UG* 105, 241, 298; *TR* 82
  use when debugging: *UG* 107
Resetting links: *LR* 128
Resource: *TR* 255
Restrictions, implementation: *LR* 155
RESUME: *TR* 88, 108, 111
Resume program
  from debugger: *TR* 98
  from simulator: *TR* 278

RETRACE: *TR* 88, 107, 112
Retry - server: *TR* 255
RETYPES: *LR* 145, 151
Retyping
  arrays: *LR* 145
  channels: *UG* 239, 243
  to a **byte** array: *PI* 25
ROM: *TR* 30, 59, 65, 163
ROM bootable code: *UG* 233
  processing configurations: *UG* 234
romsize: *UG* 74, 265
root: *UG* 74, 265
Root transputer: *UG* 298
  debugging: *UG* 106; *TR* 73
  loading over: *UG* 107; *TR* 285
root.processor.type: *TR* 166
ROUNDSN: *LR* 14
routecost: *UG* 75, 91, 188, 265
Run queue: *UG* 135, 140
Run queues, displaying: *TR* 104, 280
Run-time, checks: *PI* 31
Running programs: *UG* 44
  dynamically loaded: *UG* 250
  introduction: *UG* 18
  simple example: *UG* 37
  using isim: *UG* 38

S

Scalar channels: *LR* 152
Scalar workspace: *TR* 59
Scheduling: *UG* 239; *PI* 30
  occam processes: *UG* 260
Scheduling lists. *See* Process queue; Run queue
Scope rules: *UG* 147
Scoping of variables: *PI* 26
Screen definitions: *TR* 340
Screen size: *TR* 340
Screenstream
  output: *LR* 105
  protocol: *LR* 98
SEARCH: *TR* 113
Search path: *UG* 26; *LR* 69
  configurer: *TR* 30
  conventions: *TR* 294
search.match: *LR* 114
search.no.match: *LR* 114
Secondary operations: *UG* 246
Select process: *TR* 102
Select source file: *TR* 93
Selective linking: *TR* 196
Selective loading, libraries: *UG* 55; *TR* 178
Separate compilation: *UG* 52, 298; *TR* 10
Separate vector space: *UG* 50, 251; *TR* 6, 16
SEQ: *TR* 9
Sequential programming: *UG* 4
Serial links: *UG* 1
Server: *UG* 18, 299
  command line: *LR* 76, 77
  termination: *LR* 79
Session manager: *UG* 299; *TR* 252, 256
  configuration file: *TR* 254
SET: *UG* 69, 264
seterr: *UG* 156, 260
SHARED pragma: *TR* 19
Show debugging messages: *TR* 105
Simulator: *UG* 21; *TR* 271
  batch command files: *TR* 281
  batch commands: *TR* 281
  batch mode: *TR* 281
  booting program: *TR* 279

command
definitions: *TR* 275–281
summary: *TR* 275
command line: *TR* 271
commands: *TR* 274
errors: *TR* 282
options: *TR* 272
starting a program: *TR* 277
use in debugging: *UG* 146

SIN: *LR* 32, 51

Single step execution: *UG* 147

SINH: *LR* 41, 60

SKIP: *UG* 268; *TR* 32

Skip load
example: *UG* 107
in debugging: *UG* 123

Skip loader: *UG* 18; *TR* 285
command line: *TR* 286
command line options: *TR* 286
errors: *TR* 289

snglmath.lib: *LR* 3, 20, 26

so: *LR* 98

so.ask: *LR* 84

so.buffer: *UG* 113; *LR* 96

so.close: *LR* 70

so.commandline: *LR* 76

so.core: *LR* 79

so.date.to.ascii: *LR* 94

so.eof: *LR* 73

so.exit: *UG* 111; *LR* 79

so.ferror: *LR* 74

so.flush: *LR* 72

so.fwrite.char: *LR* 90

so.fwrite.hex.int: *LR* 91

so.fwrite.hex.int32: *LR* 92

so.fwrite.hex.int64: *LR* 92

so.fwrite.int: *LR* 91

so.fwrite.int32: *LR* 91

so.fwrite.int64: *LR* 91

so.fwrite.nl: *LR* 90

so.fwrite.real32: *LR* 92

so.fwrite.real64: *LR* 92

so.fwrite.string: *LR* 90

so.fwrite.string.nl: *LR* 90

so.getenv: *LR* 78

so.getkey: *LR* 83

so.gets: *LR* 71

so.keystream.from.file: *LR* 100

so.keystream.from.kbd: *LR* 100

so.keystream.from.stdin: *LR* 100

so.multiplexor: *UG* 112; *LR* 96

so.open: *LR* 68

so.open.temp: *LR* 69

so.overlapped.buffer: *UG* 114; *LR* 96

so.overlapped.multiplexor: *UG* 112; *LR* 97

so.overlapped.pri.multiplexor: *LR* 97

so.parse.command.line: *LR* 77

so.pollkey: *LR* 83

so.popen.read: *LR* 69

so.pri.multiplexor: *LR* 97

so.puts: *LR* 72

so.read: *LR* 70

so.read.echo.any.int: *LR* 85

so.read.echo.hex.int: *LR* 85

so.read.echo.hex.int32: *LR* 85

so.read.echo.hex.int64: *LR* 85

so.read.echo.int: *LR* 84, 85

so.read.echo.int32: *LR* 84

so.read.echo.int64: *LR* 85

so.read.echo.line: *LR* 84

so.read.echo.real32: *LR* 86

so.read.echo.real64: *LR* 86

so.read.line: *LR* 83

so.remove: *LR* 74

so.rename: *LR* 75

so.scrstream.to.ANSI: *LR* 103

so.scrstream.to.file: *LR* 101

so.scrstream.to.stdout: *LR* 102

so.scrstream.to.TVI920: *LR* 103

so.seek: *LR* 73

so.system: *LR* 79

so.tell: *LR* 73

so.test.exists: *LR* 75

so.time: *LR* 93

so.time.to.ascii: *LR* 94

so.time.to.date: *LR* 94

so.today.ascii: *LR* 95

so.today.date: *LR* 94

so.version: *LR* 80

so.write: *LR* 71

so.write.char: *LR* 87

so.write.hex.int: *LR* 88

so.write.hex.int32: *LR* 88

so.write.hex.int64: *LR* 88

so.write.int: *LR* 87

so.write.int32: *LR* 87

so.write.int64: *LR* 87

so.write.nl: *LR* 87

so.write.real32: *LR* 88

so.write.real64: *LR* 88

so.write.string: *LR* 87

so.write.string.nl: *LR* 87

Soft channels: *UG* 85, 299

Software, virtual routing: *UG* 86

Software description: *UG* 81, 267
example: *UG* 82

sortconf.pgm: *UG* 93

sortsw.inc: *UG* 93

Source level debugging: *UG* 129

SP: *UG* 111

srecord. *See* **output.format**

ss: *LR* 99

ss.beep: *LR* 109

ss.clear.eol: *LR* 108

ss.clear.eos: *LR* 108

ss.del.line: *LR* 110

ss.delete.chl: *LR* 109

ss.delete.chr: *LR* 109

ss.down: *LR* 109

ss.goto.xy: *LR* 108

ss.ins.line: *LR* 110

ss.insert.char: *LR* 109

ss.left: *LR* 109

ss.right: *LR* 109

ss.scrstream.copy: *LR* 103

ss.scrstream.fan.out: *LR* 103

ss.scrstream.from.array: *LR* 102

ss.scrstream.multiplexor: *LR* 104

ss.scrstream.sink: *LR* 101

ss.scrstream.to.array: *LR* 102

ss.up: *LR* 109

ss.write.char: *LR* 106

ss.write.endstream: *LR* 107
ss.write.hex.int: *LR* 107
ss.write.hex.int64: *LR* 108
ss.write.int: *LR* 107
ss.write.int64: *LR* 107
ss.write.nl : *LR* 107
ss.write.real32: *LR* 108
ss.write.real64: *LR* 108
ss.write.string: *LR* 107
ss.write.text.line: *LR* 107
Stack: *UG* 225; *PI* 6
  See also Workspace
  overflow detection: *UG* 225
  placing in on-chip RAM: *UG* 225
  position in memory: *TR* 53
stack.buffer: *TR* 56
Standard error: *UG* 110, 299
Standard input: *UG* 110, 299
Standard memory configuration: *TR* 153
Standard output: *UG* 110, 299
Standards
  command options: *TR* 293
  command syntax: *TR* 293
  file extensions: *TR* 295
start.offset: *TR* 168
Static area: *UG* 213
  pointer: *UG* 213
  position in memory: *TR* 53
  requirement: *UG* 213
Static data: *TR* 54
Static variables, memory map: *TR* 239
STOP: *UG* 268
STOP error mode: *UG* 45; *TR* 8, 31; *PI* 5
  debugging: *UG* 118
stopp: *UG* 260
str.shift: *LR* 115
Streamio library: *UG* 110; *LR* 98
streamio.inc: *UG* 110
streamio.lib: *UG* 110; *LR* 3
Streams: *LR* 66
String handling
  comparison: *LR* 113
  editing: *LR* 115
  library: *LR* 111
    introduction: *LR* 3
  searching: *LR* 114
string.pos: *LR* 114
STRINGTOBOOL: *LR* 125
STRINGTOHEX: *LR* 124
STRINGTOHEX16: *LR* 124
STRINGTOHEX32: *LR* 124
STRINGTOHEX64: *LR* 124
STRINGTOINT: *LR* 123
STRINGTOINT16: *LR* 123
STRINGTOINT32: *LR* 123
STRINGTOINT64: *LR* 123
STRINGTOREAL32: *LR* 124
STRINGTOREAL64: *LR* 125
Subsystem: *UG* 105, 299
  connecting: *TR* 82
  reset: *TR* 286
  wiring: *UG* 105; *TR* 287
Sun, host types: *LR* 80
Sun 4: *UG* 7, 25
SunOS: *UG* 7, 25; *LR* 81
Suspending programs: *UG* 45
Symbol data, listing: *TR* 209
Symbolic debugging: *UG* 129; *TR* 108
  See also Debugging
  compiling for: *UG* 117
Synchronized communication: *UG* 4
System call: *LR* 79
System services: *UG* 105

T

T-mode programs: *TR* 74
T4 series
  configurable memory interface: *TR* 145
  optimized library: *LR* 20, 45
T8 series
  configurable memory interface: *TR* 145
  maths libraries: *LR* 26
Tabs, in occam source: *LR* 140
TAN: *LR* 35, 54
TANH: *LR* 43, 62
Target files, for **imakef**: *TR* 222
Target transputer: *UG* 8, 299; *TR* 301; *PI* 1, 4
  command line options: *TR* 308
TB: *LR* 45
tbmaths.lib: *LR* 3, 20, 45
TCOFF: *UG* 7, 17; *TR* 4
  listing files: *TR* 218
TDS: *LR* 98
Temporaries, elimination of: *PI* 17
Terminate
  on error: *TR* 255
  the server: *TR* 255
terminate.heap.use: *UG* 214
terminate.static.use: *UG* 214
Text
  reading: *LR* 71
  stream: *LR* 68
  writing: *LR* 72
Text files, listing: *TR* 218
Time: *LR* 93, 94
  See also Clock; Date
  transputer clock: *LR* 155
Timeout: *UG* 256; *LR* 128
  channel input: *UG* 101; *LR* 128
  channel output: *UG* 101; *LR* 129
  on links: *UG* 257
TIMER: *UG* 276
  channels: *LR* 155
  parameters: *UG* 203
Timer: *LR* 153
  See also Clock
Timer queue: *UG* 135, 140
  displaying: *TR* 105, 280
TIMES: *PI* 25
Timing data: *TR* 154
Tm: *TR* 152
to.lower.case: *LR* 116
to.upper.case: *LR* 116
TOGGLE BREAK: *TR* 111
TOGGLE HEX: *TR* 114
tolerance: *UG* 75, 91, 189, 266
Toolset
  development cycle: *UG* 13
  documentation: *UG* xviii; *TR* xx; *LR* vii, viii; *PI* v
    conventions: *UG* xix; *TR* xxi; *LR* ix; *PI* vii
  file extensions: *UG* 22
  program development: *UG* 13
  standards and conventions: *TR* 293
  summary: *UG* 12
TOP: *TR* 88, 107, 112
TOP OF FILE: *TR* 89, 113
Tptr0: *UG* 134
Tptr1: *UG* 134
Traceback information, in ROM: *TR* 170
TRAM: *UG* 106, 241, 300; *TR* 285
TRANSLATE pragma: *TR* 14
TRANSPUTER: *UG* 27, 33, 104; *TR* 254, 255, 260
Transputer
  accessing: *TR* 252
    on a remote host: *TR* 261

on the local host: *TR* 261
architecture: *UG* 2
classes: *TR* 7
clock: *UG* 134, 136
in real-time programming: *UG* 3
instruction set: *UG* 281
introduction: *UG* 1
loading: *UG* 103
master: *UG* 105
module: *UG* 300
networks: *UG* 3
operation codes: *UG* 282
products: *UG* 4
root: *UG* 298
scheduler: *PI* 30
simulator: *TR* 271
targets: *UG* 299; *TR* 4, 7, 301; *PI* 1, 4
command line options: *TR* 308
timer: *UG* 134; *LR* 153
Transputer Development System: *LR* 98
Tree, network topology: *UG* 3
Trigonometric functions: *LR* 27
TRUE: *PI* 28
TVI920: *LR* 103
type: *UG* 74, 265
Type conversion library: *LR* 119
Type mapping: *LR* 151

U

UART: *UG* 240
UDPlink: *LR* 81
UNDEFINED error mode: *UG* 46, 47; *TR* 9, 17, 31; *PI* 5
undefined.NaN: *LR* 21
UNIVERSAL error mode: *UG* 46; *TR* 8, 31; *PI* 5
debugging: *UG* 118
UNIX: *UG* 25; *TR* 293
UNPACKSN: *LR* 13
Unresolved references: *TR* 196
unstable.NaN: *LR* 21
Unsupported options: *UG* 31; *TR* 294
Up, subsystem wiring: *UG* 105
Update registers: *TR* 105
Upper case: *LR* 113, 116
Usage check: *UG* 48, 300; *TR* 6, 16
disable: *TR* 19
Usage checking: *LR* 161; *PI* 7
arrays: *LR* 162
channels: *LR* 162
disable: *PI* 7
disabled: *LR* 164
Usage files, libraries: *UG* 296
User link: *UG* 300; *TR* 252, 259

V

VAL: *UG* 69, 276
Variable
non-local, access to: *PI* 27
place at address: *LR* 142
place in memory: *LR* 143
place in workspace: *UG* 242
scoping: *PI* 26
unused - elimination of: *PI* 17
VAX/VMS: *UG* 7, 25, 26, 27, 111
VECSPACE: *UG* 51; *LR* 139, 143
Vector space: *UG* 50, 51, 300; *TR* 18, 59; *LR* 147, 150; *PI* 5, 22
default: *TR* 34
disabling: *UG* 50
disadvantage: *PI* 31
in mixed language programming: *UG* 221
position in memory: *UG* 181; *TR* 55
Virtual channel: *UG* 85
disable: *UG* 87
Virtual link: *UG* 85, 152

Virtual memory: *TR* 195
Virtual routing: *UG* 86; *PI* 5
controlling: *UG* 91
disable: *UG* 48, 87
disabling: *TR* 10, 32
introduction: *UG* 10
optimization techniques: *UG* 187
software: *UG* 86
VME bus, motherboard: *UG* 105
VMS: *UG* 25, 27; *TR* 293, 342; *LR* 81
VSSIZEOF: *LR* 15, 17

W

Wait
connection: *TR* 153
race: *TR* 153
error: *TR* 159
states: *TR* 153
Warnings. *See* Error messages
Waveform diagrams: *TR* 156
Wdesc: *UG* 134
WdescIntSave: *UG* 134
Wired down: *UG* 105; *TR* 82, 287
Wired subs: *UG* 105; *TR* 82, 287
Word alignment, placed objects: *UG* 240
Word length, independence: *UG* 240
WORKSPACE: *UG* 51, 241; *LR* 139, 143
Workspace: *UG* 300; *TR* 18; *LR* 147, 148; *PI* 6
See also Stack
allocation: *PI* 17, 19
default: *TR* 34
in **ASM** code: *UG* 247
in dynamic loading: *UG* 251
in mixed language programming: *UG* 221
position in memory: *UG* 181
Worm: *UG* 300
Wreg: *UG* 281
Write
mode: *TR* 153
strobe: *TR* 152
to memory, in **idebug**: *TR* 106
WSSIZEOF: *LR* 15, 17

X

xlink.lib: *UG* 256; *LR* 3, 128

Z
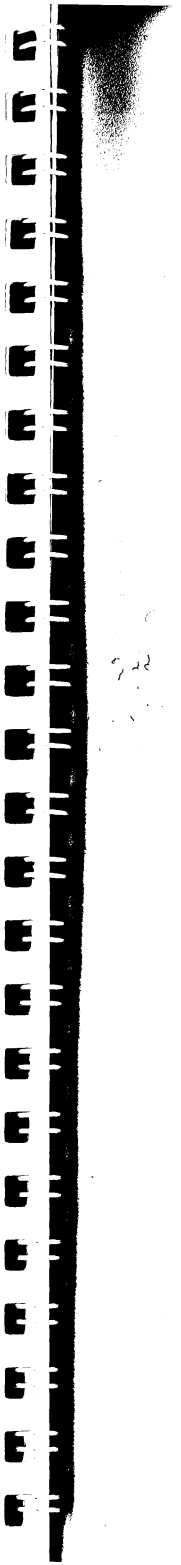
Z, command line option: *UG* 31; *TR* 294