


**webhacking.kr**

hello dpfla0502

Copyright© Oldzombie All Rights Reserved.

Webhacking.kr Write up

## Webhacking.kr 38번 Write up

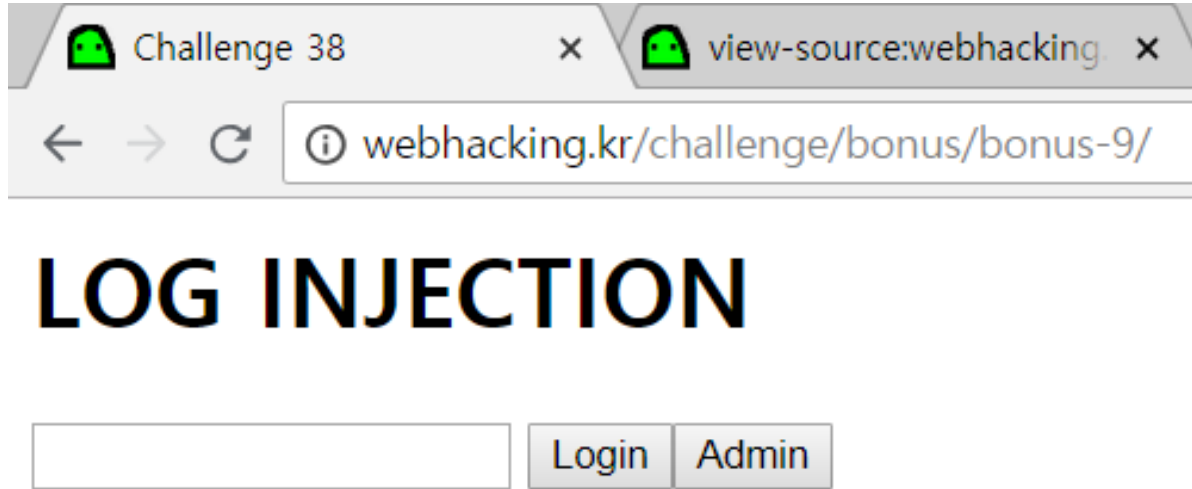


< Log Injection >

: sql Injection 처럼 파라미터를 통해 로깅을 조절하는 방법

# Webhacking.kr 38번 Write up


## < 페이지 소스 >

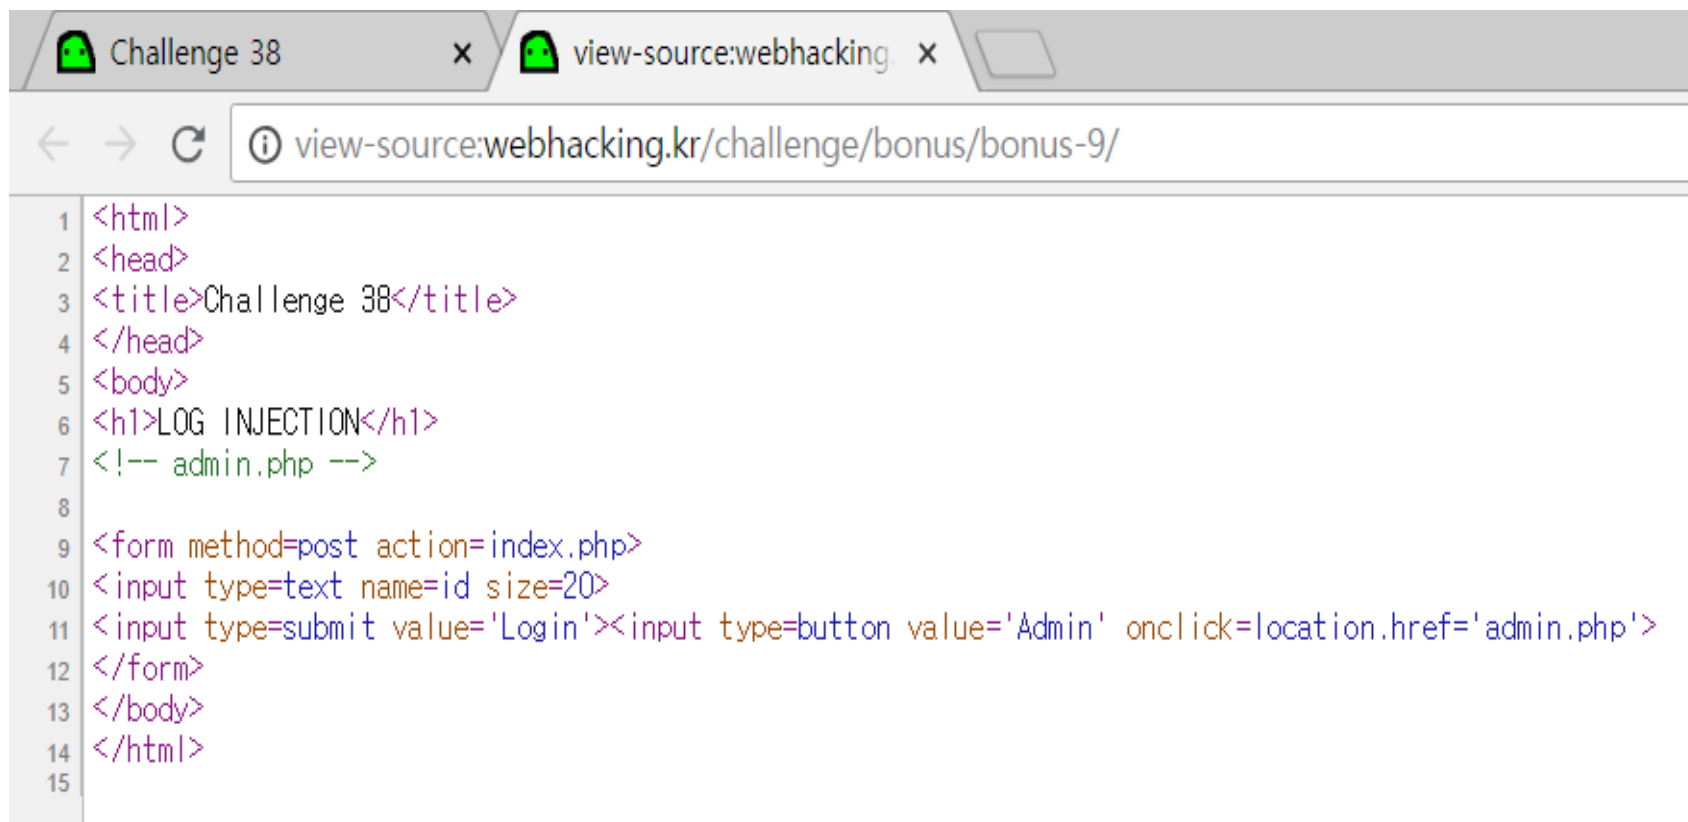

The screenshot shows a web browser window with two tabs. The first tab is titled 'Challenge 38' and the second tab is titled 'view-source:webhacking.kr'. The address bar shows the URL 'view-source:webhacking.kr/challenge/bonus/bonus-9/'. The page content is the source code of an HTML document, which is displayed in a monospaced font with syntax highlighting. The code is as follows:


```
1 <html>
2 <head>
3 <title>Challenge 38</title>
4 </head>
5 <body>
6 <h1>LOG INJECTION</h1>
7 <!-- admin.php -->
8
9 <form method=post action=index.php>
10 <input type=text name=id size=20>
11 <input type=submit value='Login'><input type=button value='Admin' onclick=location.href='admin.php'>
12 </form>
13 </body>
14 </html>
15
```

## Webhacking.kr 38<sup>부</sup> Write up

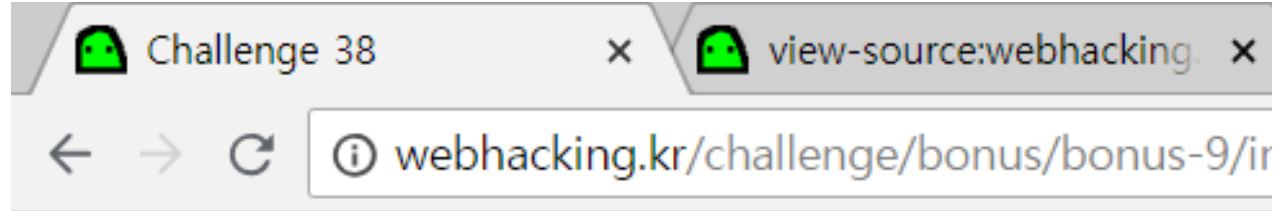

# LOG INJECTION


you are not admin

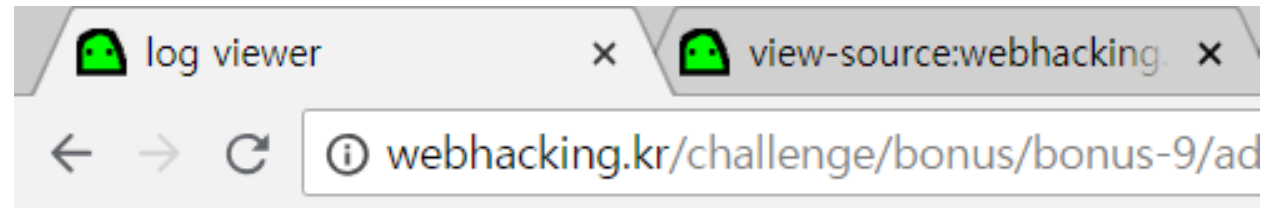

log  
221.161.254.100:yell

Webhacking.kr 38<sup>th</sup> Write up


Win admin

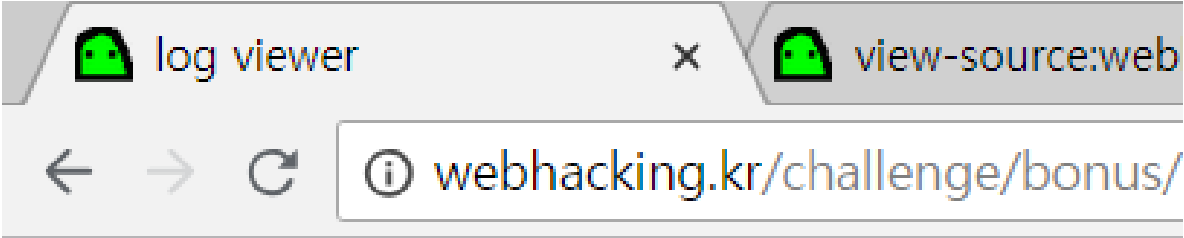

```
log
221.111.111.111 0:yell
221.111.111.111 0:
admin
```

[100]	[100]	[100]
37	100	39
[250]	prob38	[100]
40	41	45

# Webhacking.kr 26번 Write up

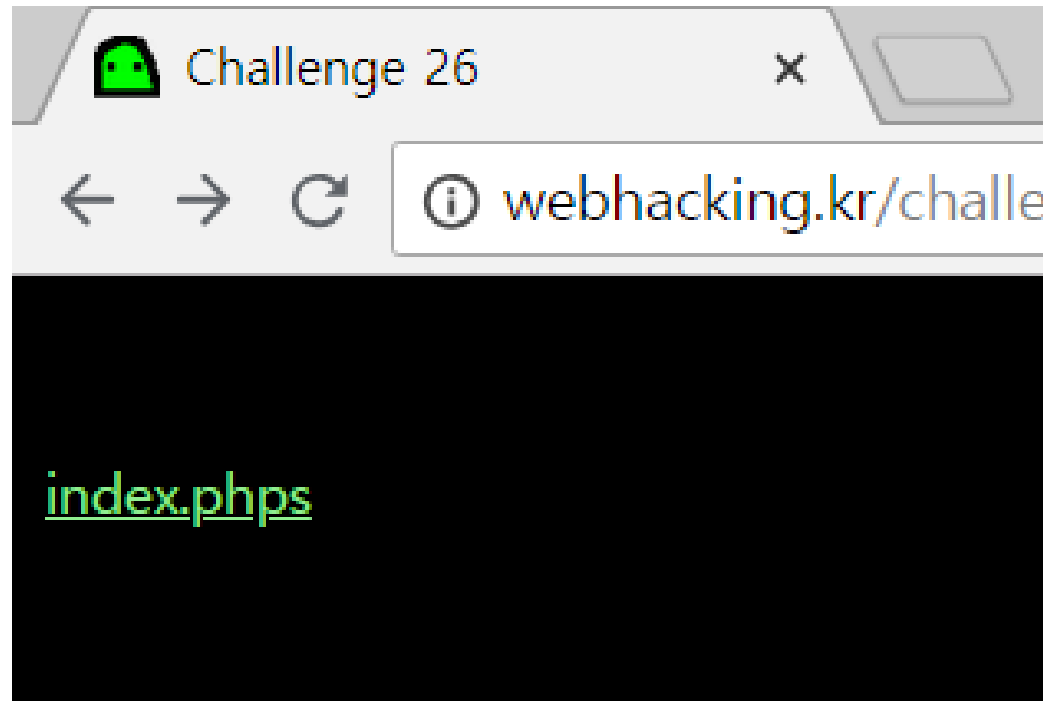

```
webhacking.kr/challenge x
webhacking.kr/challenge/web/web-11/index.php

<html>
<head>
<title>Challenge 26</title>
<style type="text/css">
body { background:black; color:white; font-size:10pt; }
a { color:lightgreen; }
</style>
</head>
<body>
<?

if(ereg("admin",$_GET[id])) { echo("<p>no!"); exit(); }

$_GET[id]=urldecode($_GET[id]);


if($_GET[id]=="admin")
{
@solve(26,100);
}

?>

<br><br>
<a href=index.php>index.php</a>
</body>
</html>
```

## Webhacking.kr 26번 Write up

Admin = %b1%b4%bD%b9%bE

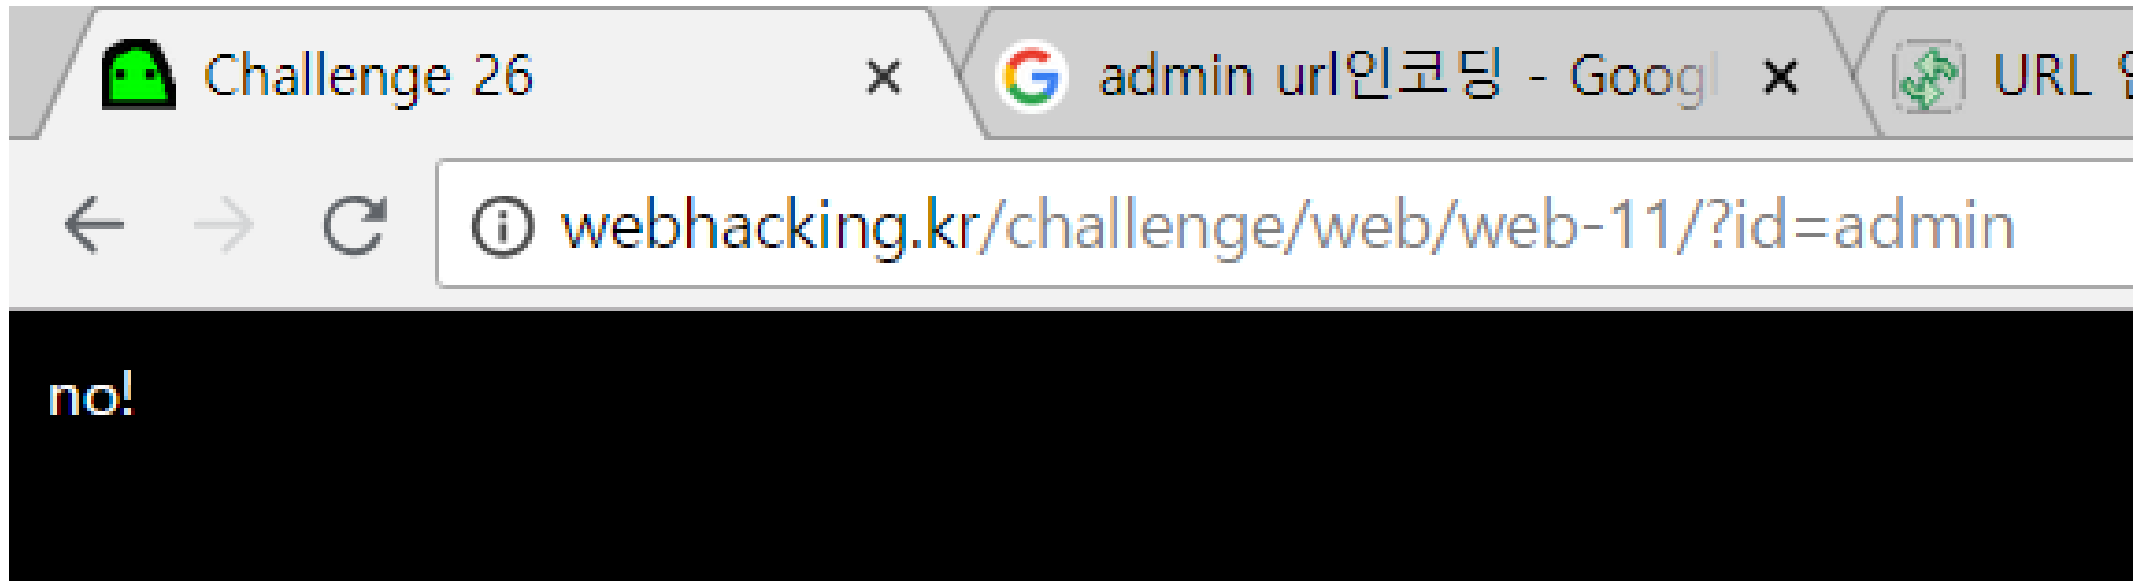

## Webhacking.kr 26번 Write up

짜아~!

webhacking.kr 내용:

Congratulation!

확인



11  
—  
E

—

!